

Functional homogeneous zones (fHZs) in viticultural zoning procedure: an Italian case study on Aglianico vine.

A. Bonfante^{1*}, A. Agrillo¹, R. Albrizio¹, A. Basile¹, R. Buonomo¹, R. De Mascellis¹, A. Gambuti², P. Giorio¹, G. Guida¹, G. Langella, P. Manna¹, L. Minieri², L. Moio², T. Siani², F. Terribile²

¹National Research Council of Italy (CNR) – Institute for Mediterranean Agricultural and Forestry Systems (ISAFOM), Ercolano (NA), Italy

²University of Naples Federico II, Department of Agriculture, Portici (NA), Italy

*Corresp. author : A. Bonfante, Telephone +390817717325, Fax +390817718045, Email: antonello.bonfante@cnr.it

Abstract

This paper aims to test a new physically oriented approach to viticulture zoning at farm scale, strongly rooted in hydrogeology and aiming to achieve a better use of environmental features with respect to plant requirements and wine production. The physics of our approach is defined by the use of soil-plant-atmosphere simulation models, applying physically-based equations to describe the soil hydrological processes and solve soil-plant water status.

This study (ZOVISA project) was conducted on a farm devoted to high quality wines production (Aglianico DOC), located in South Italy (Campania region, Mirabella Eclano-AV). The soil spatial distribution was obtained after standard soil survey informed by geophysical survey. Two Homogenous Zones (HZs) were identified; in each one a physically based model was applied to solve the soil water balance and estimate the soil functional behaviour (crop water stress index, CWSI) defining the functional Homogeneous Zones (fHZs). For the second process, experimental plots were established and monitored for investigating soil-plant water status, crop development (biometric and physiological parameters) and daily climate variables (temperature, solar radiation, rainfall, wind).

The effects of crop water status on crop response over must and wine quality were then evaluated in the fHZs. This was performed by comparing crop water stress with (i) crop physiological measurement (leaf gas exchange, chlorophyll-a fluorescence, leaf water potential, chlorophyll content, LAI measurement), (ii) grape bunches measurements (berry weight, sugar content, titratable acidity, etc.) and (iii) wine quality (aromatic response). This experiment proved the usefulness of the physical based approach, also in the case of mapping viticulture microzoning.

Key Words : *Terroir, SWAP model, LWP*

101 1 Introduction

102 Concepts such as terroir and viticulture zoning are becoming increasingly more important for planning and managing
103 vineyards aiming at high quality wine (Gladstones and Smart, 1997; Carey, 2001; Vaudour, 2003). Basically their practical
104 implementation (Deloire et al., 2005; Fregoni, 1988) aims to classify the landscape (mainly climate and soil), studying its
105 interaction with vineyard and wine quality. Mapping of terroir and viticulture zoning have been developed at all scales,
106 especially since the 1990s following the widespread use of geomatics (Girard and Girard, 2003).

107 The methodology (even if not unique) indeed gave many positive results, but also showed some important limitations
108 mainly related to its strongly empirical base. In other words the terroir is a sort of “black box” in which the quantitative
109 linkage between climate–soil–plant and wine is empirically or statistically described (e.g. Brousset et al. 2010) and not
110 analyzed in its mechanics (Bonfante et al. 2011).

111 Recently some changes have been made and the spatial analysis of terroirs has improved, incorporating some key
112 features known to strongly affect wine quality. Among them are solar radiation and bioclimatic indexes (Failla et al.,
113 2004; Vaudour, 2001) and also morphometric data and multitemporal remotely sensed images (Vaudour et al. 2010).

114 Moreover, Bonfante et al. (2011) demonstrated that terroir analysis – applied at a district scale (mesoscale sensu
115 Vaudour & Shaw 2005) - can become more profitable by combining high quality GIS (as bioclimatic indexes) with water
116 balance simulation modelling for addressing the key and very complex issue of soil-plant water stress. This is very
117 important because even if it is well known that water stress strongly affects grape quality, its spatial description can be
118 a very difficult issue.

119 Despite this result, it is still very questionable whether a similar approach can be usefully applied at a more local – less
120 aggregated - spatial scale where ecophysiological functioning and land management play a key role. Moreover, this
121 detailed scale is very useful because it makes it possible to evaluate the functional relationships between viticulture
122 zones, *plant-soil water stress*, vineyard status and grape wine quality.

123 To address this issue here we refer to “micro-zoning” in coherence with the term “micro-scale” used by Vaudour & Shaw
124 (2005) for terroir zoning.

125 In this perspective, the aim of this paper is to prove that physically based approaches can be usefully employed also at
126 very detailed scales such as for viticulture microzoning, in order to effectively separate different viticulture zones
127 (Functional Homogeneous Zones, fHZ) on the basis of their potential functionality (e.g. potential water stress) and by
128 doing so better orient viticulture management.

129 This was done on an experimental site (2.3ha over a homogeneous hilly slope) characterized by large soil variation under
130 the very same climatic conditions.

131 2 Materials and methods

132 2.1 Study Area

133 The study area is located in a hilly environment of southern Italy (Mirabella Eclano - AV, Campania region: Lat.
134 41.047808°, Lon 14.991684°, elev. 368 m a.s.l.), in a farm oriented to the production of high quality wines, namely
135 Quintodecimo.

136 The study area is included in the “marl-sandstone/carbonate hills” landscape system (D3). The only information on soil
137 types is available on a rather coarse scale: a soil-landscape map of the whole Campania Region at a 1:250.000 scale (Di
138 Gennaro et al., 2002).

139 The main soil types of the Mirabella Eclano area are identified as Haplic Calcisols and Calcaric Cambisols. However,
140 considering the scale, this map cannot be employed to describe the soil type at the specific site of the experiment.

141 The vineyard studied was Aglianico cultivar (controlled designation of origin –DOC /AOC), standard clone population
142 planted in the year 2000 on 1103 Paulsen rootstocks (espalier system, cordon spur pruning, 5000 units per hectare)
143 placed along a slope of length 90 m with an 11% gradient. Legume green manure management is applied.

144 The long-term (2003-2013) mean daily temperature annually of the study area was 14.7 (±0.9) °C, while the mean annual
145 rainfall was 802 (±129) mm (data from the Regional weather station of Mirabella Eclano – AV- at 1 km of study area)

Climate monitoring within the farm during the 2011 to 2013 vintage showed that during the cropping season (April to early October) the mean daily temperature was 20.9 (± 1.2) °C, while the precipitation was very variable during the three vintages, ranging from 285 to 200 mm.

2.2 Method used for mapping Homogeneous Zones

The viticulture microzoning procedure used is rooted in procedures already applied at various scales. This includes standard soil mapping and geometric spatial analysis of solar radiation, bioclimatic indexes, morphometric data and remotely sensed images (Failla et al. 2004; Vaudour 2001; Vaudour et al. 2010). Moreover, the procedure included geophysical mapping which has proved to be a very useful tool for soil spatial analysis also in precision viticulture (Andrenelli et al. 2010; Priori et al. 2010; Priori et al. 2012).

More specifically, the employed procedure is given in the flow diagram in fig. 1:

Step 1: Identification of Homogeneous Zones (HZs) obtained from standard soil mapping (landscape units, soil profiles, minipits, etc.) at a detailed scale supported by geophysical survey. These HZs were also statistically described in terms of their DTM and DSM derived parameters.

Step 2: Evaluation of the hydrological indicator of crop water status (potential crop water stress index - CWSI) by applying physically based simulation modelling to the representative soils of the previously defined HZs, and definition of functional Homogeneous Zones (fHZs);

Step 3: vine/must/wine monitoring over the fHZs;

The realization of step 1 gives an advanced but "static" description of landscape useful for making a standard Land Evaluation (qualitative and empirical approach) to evaluate how suitable the land is for the vine. The innovation is enclosed in step 2, where a key component of the functional behavior of soils to vine responses is described dynamically by means of a physically based approach (Bonfante et al. 2011). This last step makes it possible to discriminate soil behavior through a hydrological indicator of plant water status (Crop Water Stress Index - CWSI) and to identify the functional Homogeneous Zones (fHZs) from the HZs. The term "functional" is employed in order to strengthen the soil-plant-climate functionality. Finally, step 3 allows evaluation of plant behavior within any fHZs and testing of the occurring CWSI.

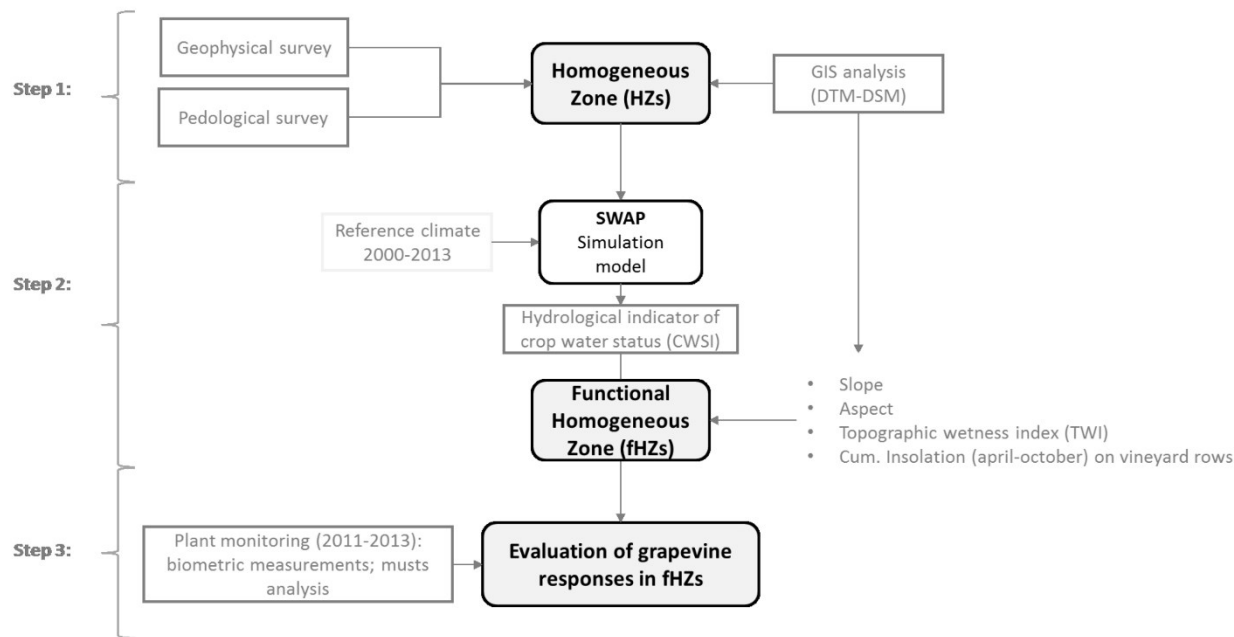


Fig. 1. Flow diagram illustrating the proposed approach applied to the case study of Quintodecimo farm.

173 2.3 Pedological survey and soil measurements

174 A combined geophysical-pedological approach was used to derive the map of the Homogeneous Zones (HZs) in the
175 study area. These HZs were obtained after a detailed soil survey that was adapted to the specific need of this research.
176 A preliminary map of the most important soil forming factors in the area was obtained by combining a geomorphological
177 analysis of LIDAR-derived DEM with local geological information. This led to the identification of the main soil-landscape
178 units. The actual soil survey (soil profiles, minipit and augering) was supported by geophysical survey techniques. These
179 techniques, based on non-invasive tools (generally applied to environmental studies, e.g. for geological prospecting),
180 were used as very quick survey systems that gave initial information on the general spatial variability of the soils that
181 were investigated, better planning of the field investigation in the pedological survey, and improvement in the soil map
182 resolution emphasizing the spatial soil micro-variability (traditional soil surveys and soil analysis are usually time-
183 consuming and expensive, especially for high resolution maps). Geoelectrical soil mapping has become widely accepted
184 and considered as a successful geophysical method that provides the spatial distribution of relevant agronomic
185 information for precision farming (Lück et al., 2009).

186 Methods based on electrical properties are particularly promising as support to pedological surveys because important
187 soil physical properties are strongly correlated to electrical conductivity which, changing in space, can represent spatial
188 soil distribution. Geophysical methods offer a valuable means for obtaining subsidiary data in an efficient way, and have
189 been widely applied in soil sciences for a considerable period of time (Samouëlian et al., 2005).

190 In this study the apparent soil electric conductivity (ECa), was carried out by Electro-Magnetic Induction (EMI) sensors,
191 which represents a very useful tool for identifying soil map units and soil properties in respect of clay content (Morari
192 et al., 2009), soil depth (Saey et al., 2009), water content (Davies, 2004; Cousin et al., 2009; Lück et al., 2009; Tromp-
193 van Meerveld and McDonnell, 2009) and water salinity (Doolittle et al., 2001).

194 However soils, like every other geological material, are not uniform, consequently what is specifically measured is an
195 apparent electrical conductivity (ECa), which can be defined as the actual conductivity of a rock homogeneous and
196 isotropic equivalent to a real heterogeneous and anisotropic media.

197 The instrument used for surface mapping the electric conductivity was the EM38-DD (Geonics Ltd., Ontario, Canada)
198 used in both VDM (vertical dipole mode) and HDM (Horizontal dipole mode). The sensor of instrument was calibrated
199 to minimize the errors before the survey, which was performed in July 2011 during grape ripening. The instrument was
200 placed on a PVC sledge and pulled by a tractor along the inter-rows, at a distance of about 5 meters to avoid interference
201 phenomena. The use of the sledge makes it possible to keep the instrument at a constant distance from the soil, making
202 data acquisition easier and more accurate.

203 The data were recorded on a GPS-supplied data-logger with European Geostationary Navigation Overlay Service
204 (EGNOS)–Wide-Area Augmentation System (WAAS) correction (accuracy » 3 m), which made it possible to
205 georeferenced and map the measured property. The instrument was set to acquire one measurement per second.

206 Data post-processing was performed by ordinary kriging with 1 m resolution. The final result of the EM38-DD survey
207 was therefore a regular grid of data points including ECa for two depths (1.6 m for VDM and 0.76 m for HDM). These
208 horizontal (HDM) and vertical (VDM) ECa maps were used as baseline data for a pedological survey based on soil
209 augerings and soil profiles descriptions. This was done similarly with the classic (overlying procedures) soil survey of
210 other thematic layers (geology, geomorphology, etc.).

211 The soil profiles were described according to FAO (2006). Chemical analyses were performed according to the official
212 methods of the Italian Ministry of Agriculture and Forestry REF. The grain size distribution (GSD) was determined by a
213 laser granulometer (Malvern Mastersizer 2000).

214 Undisturbed soil samples (volume $\cong 750 \text{ cm}^3$) were collected from each soil horizon and hydraulic properties were
215 determined in the laboratory to simulate the hydrological conditions of the soil by means of an agro-hydrological model,
216 which is illustrated in section 2.5.

217 Soil samples were saturated from the bottom and the saturated hydraulic conductivity was measured by a permeameter
218 (Reynold et al., 2002). After sealing the bottom surface to set a zero flux, measurements were then taken during drying:
219 at appropriately pre-set time intervals, the weight of the whole sample and the pressure head at three different depths
220 (by means of tensiometers) were determined. An iterative procedure was applied for estimating the water retention
221 curve from these measurements. The instantaneous profile method was used to determine the unsaturated hydraulic
222 conductivity. Moreover, some points at a lower water content of the dry branch of the water retention curve were

223 determined by a dew-point system (WP4 dew-point potentiometer, Decagon devices, Inc.). Details on the tests and
 224 overall calculation procedures were described by Basile et al. (2012) and Bonfante et al. (2010).
 225

226 2.4 The hydrological indicator: Crop Water Stress Index (CWSI)

227 The effects of water stress on wines quality, appearance, flavour, taste and aroma have been clearly highlighted by
 228 different authors: Matthews et al. (1990) Van Leeuwen et al., 2009, Chapman et al., 2005; Acevedo-Opazo et al., 2010,
 229 Intrigliolo and Castel 2011 and Romero et al., 2013, differentiating also the effects between early or late water deficit
 230 treatments. The estimate of water stress at the different phenological stages can indeed, therefore, represent an
 231 important tool in terroir classification. Different variables (e.g. air temperature, wet-bulb temperature, etc.) could be
 232 applied to develop a proper water stress index, but as reported by Kozak et al., 2006, the use of transpiration
 233 information is realistically more variable (in respect to Evapotranspiration) for defining the crop water stress. In our
 234 approach, to simulate the soil water balance we used a simulation model (SWAP) based on the Richards equation, very
 235 different from the one applied by Kozak et al. It is very robust for stimulating the soil water balance and, moreover, it
 236 was previously used and tested in Italy and in the same Campania Region (Bonfante et al., 2010; 2011).
 237 The stress index estimated from the model output is a daily crop water stress index (CWSI), defined as follows:
 238

$$239 \text{CWSI} = [1 - (T_r/T_p)] \cdot 100 \quad (1)$$

240 where T_r is the daily actual water uptake and T_p is the daily potential transpiration.

241 The sum of the daily CWSI in the required period represents the cumulated stress CWSI_{cum} :

$$244 \text{CWSI}_{cum} = \frac{[\int_{t_1}^{t_2} 1 - (T_r/T_p) \cdot dt]}{(t_2 - t_1)} \cdot 100 \quad (2)$$

245 The application of this index, changing the integration time (t_1 and t_2), makes it possible to estimate plant water stress
 246 at different stages of crop growth (shoot growth, flowering, berry formation, berry ripening) (Fig.2).

247 Finally, this index was used to analyse the PHZs behaviours and successively define the HZs.
 248
 249

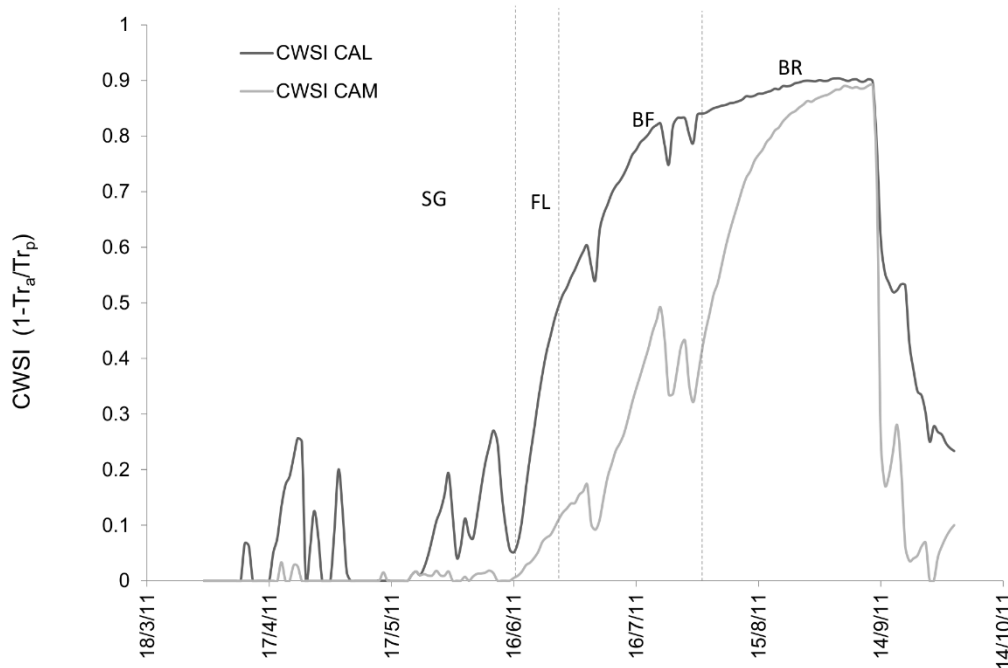


Fig.2. The crop water stress index (CWSI) simulated by SWAP in the HZs CAL and CAM in the year 2011 during the cropping season. (SG= Shoot growth; FL= Flowering; BF= Berry formation; BR= Berry Ripening)

2.5 Simulation modelling

The Soil–Water–Atmosphere–Plant (SWAP) model (Kroes et al., 2008) was applied to solve the soil water balance and to calculate the CWSI for each soil identified by the soil survey. It was already used in viticulture by different authors (Ben-Asher et al., 2006; Minacapilli et al., 2009; Bonfante et al., 2011; Rallo et al., 2012).

SWAP is an integrated physically based simulation model of water, solute and heat transport in the saturated – unsaturated zone in relation to crop growth. In this study only the water flow model was used; it assumes a 1-D vertical flow processes and calculates the soil water flow using the Richards equation:

$$C(h) \cdot \frac{\partial h}{\partial t} = \frac{\partial \left[K(h) \cdot \left(\frac{\partial h}{\partial z} + 1 \right) \right]}{\partial z} - S(h) \quad (3)$$

where $C(h) = \partial \theta / \partial h$ is the differential soil water capacity, θ ($\text{cm}^3 \text{cm}^{-3}$) is the volumetric soil water content, h (cm) is the soil water pressure head, t (d) is the time, z (cm) is the vertical coordinate taken positively upward, K (cm d^{-1}) is the hydraulic conductivity and S ($\text{cm}^3 \text{cm}^{-3} \text{d}^{-1}$) is the water extraction rate by plant roots.

Soil water retention is described by the unimodal $\theta(h)$ relationship proposed by van Genuchten (1980), expressed in terms of the effective saturation, Se , as follows:

$$Se = \left[\frac{1}{1 + (\alpha|h|)^n} \right]^m \quad (4)$$

Where $Se = (\theta - \theta_r) / (\theta_0 - \theta_r)$, θ_r and θ_0 are the residual water content and the water content at $h=0$ respectively, and α (cm^{-1}), n and m are curve-fitting parameters.

Mualem's expression (Mualem, 1976) is applied to calculate relative hydraulic conductivity, K_r . Assuming $m=1-1/n$, van Genuchten (1980) obtained a closed-form analytical solution to predict K_r at a specified volumetric water content:

$$K_r(Se) = \frac{K(Se)}{K_0} = Se^\tau \cdot \left[1 - \left(1 - Se^{1/m} \right)^m \right]^2 \quad (5)$$

where K_0 is the hydraulic conductivity measured at θ_0 , and τ is a parameter which accounts for the dependence of the tortuosity and partial correlation between adjacent pores.

The condition at the bottom boundary can be set in several ways (e.g. pressure head, water table height, fluxes, impermeable layer, unit gradient, etc.).

The upper boundary conditions of SWAP in agricultural crops are generally described by the potential evapotranspiration ET_0 , irrigation and daily precipitation. The potential evapotranspiration is then partitioned into potential evaporation, E_p , and potential transpiration, T_p , according to the LAI evolution, following the approach of Ritchie (1972).

SWAP simulates water uptake and actual transpiration according to the model proposed by Feddes et al. (1978), where the root water uptake, S , is described as a function of the pressure head, h :

$$S(h) = \alpha(h) \cdot S_{max} = \alpha(h) \cdot \frac{T_p}{|z_r|} \quad (6)$$

where z_r (cm) is the thickness of the root zone and $\alpha(h)$ is a semi-empirical function of the pressure head h , varying between 0 and 1. The shape of the function $\alpha(h)$ depends on four critical values of h , which are related to crop type and to potential transpiration rates. The actual transpiration rate T_a (cm d^{-1}) is computed by the integration of S over the root layer. The root depth is specified by the user as a function of the development stage.

290 *Model parameters and data for simulations:*

291 - the upper boundary condition comes from the daily data of the Mirabella Eclano Regional weather station (1

292 km from the study area) integrated with the micrometeorological station located ~~in~~ at the farm. Daily potential

293 Evapotranspiration (ET₀) was determined by applying the Penman-Monteith equation.

294 - the bottom boundary condition was set as a unit gradient.

295 - crop data. The Leaf Area Index was measured in different phenological phases by a ceptometer, rooting depth

296 was measured during the profile description, the water uptake function parameters were derived from

297 literature (Taylor and Ashcroft, 1972).

298 - the hydraulic properties were parameterised by fitting a procedure of the van Genuchten-Mualem model to

299 the experimental data (see section 2.2).

300 The SWAP model was previously calibrated and validated in both representative soils from the study area, on the soil

301 water content measured at different soil depths by TDR probes (5 soil depths until 100 cm) in the years 2011 and 2012

302 respectively. In particular, the Root Mean Square Error (Loague and Green 1991) showed values (over all the soil profile)

303 of 0.034 (± 0.03) for the calcisol and 0.032 (± 0.01) for the cambisol with a correlation index "r" of 0.75 (± 0.3) and 0.90

304 (± 0.1) respectively (indexes are a weighted average over depths along the profile (until -100 cm, rooting zone).

305 The RMSE values agree with those shown in a previous study (Bonfante et al., 2010). Moreover, Sheikh and van Loon

306 (2007) reported several RMSE values obtained from calibration and validation procedures by: Heathman et al. (2003),

307 Crescimano and Garofalo (2005), Mertens et al. (2005), Sing (2005), Wegehenkel (2005) and Sheikh and van Loon (2007).

308 Most of these results have a range of 0.03-0.05. Finally, Eitzinger et al. (2004), comparing SWAP, CERES and WOFOST

309 models, obtained RMSE values ranging from 0.007 to 0.07 for different soils, models and crops.

310 We can therefore consider the application of SWAP in both soils as being good for predicting the soil water balance.

311

312 2.6 GIS analysis: DTM and DSM information

313 High resolution Digital Surface Models (DSM) and Digital Terrain Models (DTM) of the study area were acquired

314 (respectively in April 2011, 1 m spatial resolution – DTM and July 2013, 0.30 m spatial resolution- DSM) with LiDAR

315 technologies, as part of an ongoing project in the study area. These models represent the elevation values of the ground

316 level plus those aboveground (i.e. canopy). They were processed using specific software coupled with the GIS

317 environment (ArcGIS, QGIS and SAGA open source software) to support the procedures of step 1 concerning (i) the

318 geomorphological analysis for the pedological survey (identification of preliminary landscape mapping units), and (ii) to

319 investigate the variation of the study area within the Homogeneous Zones. These high spatial resolution acquisitions

320 gave detailed auxiliary spatial information such as the estimate of solar radiation taking into consideration shadows

321 from vineyards. Specifically, continuous maps of slope, aspect and topographic wetness index (TWI) were obtained from

322 the DTM and potential insolation at very high spatial resolution from the DSM. More specifically, these last derived

323 maps were realized considering the presence of vineyard rows as a 3D objects in space, able to influence insolation

324 through the formation of intra-rows shadows. Subsequently, all of this information was used to characterize the

325 differences between the fHZs identified in the vineyard.

326

327 2.7 Crop measurements

328 Monitoring was conducted for three years (2011 to 2013) within the fHZs (identified in step 2) on the vegetative growth

329 of 27 plants (54 plants over 2.3 ha) until the harvest. The measurements were realized randomly on a weekly or biweekly

330 basis, in relation to the measured variable and the physiological crop stage.

331 The midday Leaf Water Potential (LWP; MPa) was assessed for each fHZs on a set of 10 plants randomly chosen between

332 the 27 plants monitored, using a Scholander type pressure bomb (SAPS II, 3115, Soil moisture Equipment Corp., Santa

333 Barbara CA, U.S.A). Photosynthetic CO₂ assimilation ($\mu\text{mol m}^{-2} \text{s}^{-1}$), stomatal conductance to water vapour ($\text{mol m}^{-2} \text{s}^{-1}$)

334 and effective quantum yield of PSII photochemistry (ΦPSII) in light-adapted leaves were measured by means of a

335 portable photosynthesis system (Li-6400-40, LiCor, Lincoln, NE, U.S.A.). The light source was set at a saturating

336 Photosynthetic Photon flux density of 1800 $\mu\text{mol m}^{-2} \text{s}^{-1}$ while the external CO₂ source was set at 370 $\mu\text{mol mol}^{-1}$. The

337 instrument software calculated the various gas-exchange parameters on the basis of the von Caemmerer and Farquhar

338 (1981) model, and Φ PSII according to Genty et al. (1989). The chlorophyll content of the leaves was optically estimated
339 as a relative index (CCL) using a handheld meter (CCM200, Chlorophyll content meter Apogee Instruments, Inc., Logan,
340 UT.) as the ratio of the fractional transmittances at 653 and 931 nm.

341 A linear Accupar LP-80 PAR-LAI ceptometer (Decagon Device Inc., Pullman, WA, USA) was used to measure light
342 interception by the vineyard and to estimate the leaf area index (LAI). The ceptometer had 80 photosynthetic photon
343 flux density (PPFD) sensors spaced at 1 cm intervals, and it was programmed to average readings of 10 sensors at a time
344 before logging data. The PPFD transmitted through the canopy (PPFDt) was measured at 0.25 cm above soil surface over
345 a grid of 0.1 x 0.1 cm² across an area of length 2 m and with 2 m between the rows. The measurements were carried
346 out in 3-4 replicates in both CAL and CAM sites, while the measurements taken in a clear area near the two sites were
347 taken as the PPFD incident over the canopy (PPFDi). Intercepted light (PPFDint) was calculated as the difference between
348 incident and transmitted PPFD, whereas the fractional light interception (fi) was calculated as the ratio between PPFDint
349 and PPFDi. Statistically significant differences between the means of the analysed variables for the two sites were
350 evaluated using the Student's t-test. A null hypothesis was rejected at $P \leq 0.05$.

351 2.8 Must/wine characteristics

352 In addition to the crop measurements, the must and wine characteristics were monitored within the fHZs (identified in
353 step 2) on 27 plants for three years (2011 to 2013). In particular, of the 27 plants monitored, 12 were used to collect
354 the grapes at harvest and 15 for sampling scalar grapes (randomly sampled at each measurement date).

355 The Standard chemical analyses and spectrophotometric measurements of must and wine were carried out as follows:
356 Standard chemical analyses (soluble solids, total acidity, pH, total polyphenols (Folin-Ciocalteu Index) and
357 Absorbances (Abs) were measured according to the OIV Compendium of International Methods of Analysis of Wine and
358 Musts (OIV 2007). Color intensity (CI) and hue were evaluated according to the Glories method (1984). Total
359 anthocyanins were determined by the spectrophotometric method based on SO₂ bleaching (Ribèreau-Gayon and
360 Stonestreet 1965). Tannins were determined according to Ribèreau-Gayon and Stonestreet (1966). Analyses were
361 performed in duplicate using basic analytical equipment and a Shimadzu UV-1800 (Kyoto, Japan) UV
362 spectrophotometer.

363 Polyphenol was extracted from the grapes as follows: the separate extraction of berry components was carried out in
364 duplicate, simulating the maceration process necessary for the production of red wines (Mattivi et al., 2002; Vacca et
365 al., 2009). Briefly: berries (200 g) were cut in two with a razor blade, and seeds and skins were carefully removed from
366 each half of the berry. The pulp on the inner face of the berry skin was removed using an end-flattened spatula in an
367 attempt to preserve skin integrity. Skins and seeds were immediately immersed in a 200 mL solution of ethanol: water
368 (12:88 v/v), 100 mg/L of SO₂, 5 g/L tartaric acid and a pH value adjusted to 3.2 (with NaOH) and extracted for five days
369 at 30°C. The extracts were shaken by hand once a day. Skins and seeds were removed from the hydro-alcoholic solution
370 after five days and the skin extract was centrifuged for 10 min at 3500 × g. Extracts were poured into dark glass bottles,
371 flushed with nitrogen and stored at 4°C until spectrophotometric analyses.

372 Quantitative data relative to the phenolic compounds of the treated wines were compared using Fisher's least
373 significant differences (LSDs) procedure. Analyses were performed using XLSTAT (Addinsoft, XLSTAT Version 2013.6.04).
374 All data are means of four values (2 experimental replicates X 2 analytical replicates).

375

376 3. Results and Discussion

377 3.1 Homogeneous Zones (HZ) identification after soil and geophysical mapping

378 In order to identify potentially different environments leading to Homogeneous Zones, we performed a standard soil
379 mapping adapted to the specific needs of this research. The combination of a geomorphological analysis of LIDAR-
380 derived DEM and local geological data led to the production of preliminary landscape mapping units. These mapping
381 units (not reported) depict three different environments, namely (i) a summit landscape unit having a slope gradient of
382 about 5-10% developed over clayey sediments with clear signs of local erosional processes, (ii) an upslope landscape
383 unit having a slope gradient of about 25-30% developed over clayey sediments with little signs of erosional processes,

384 (iii) a downslope landscape unit having a slope gradient of about 7-15 % developed over a colluvium landform with no
 385 signs of erosion.
 386 An EMI survey was then produced on these units to orient the pedological survey (also in terms of soil variability) and
 387 to define the boundaries of HZs.
 388

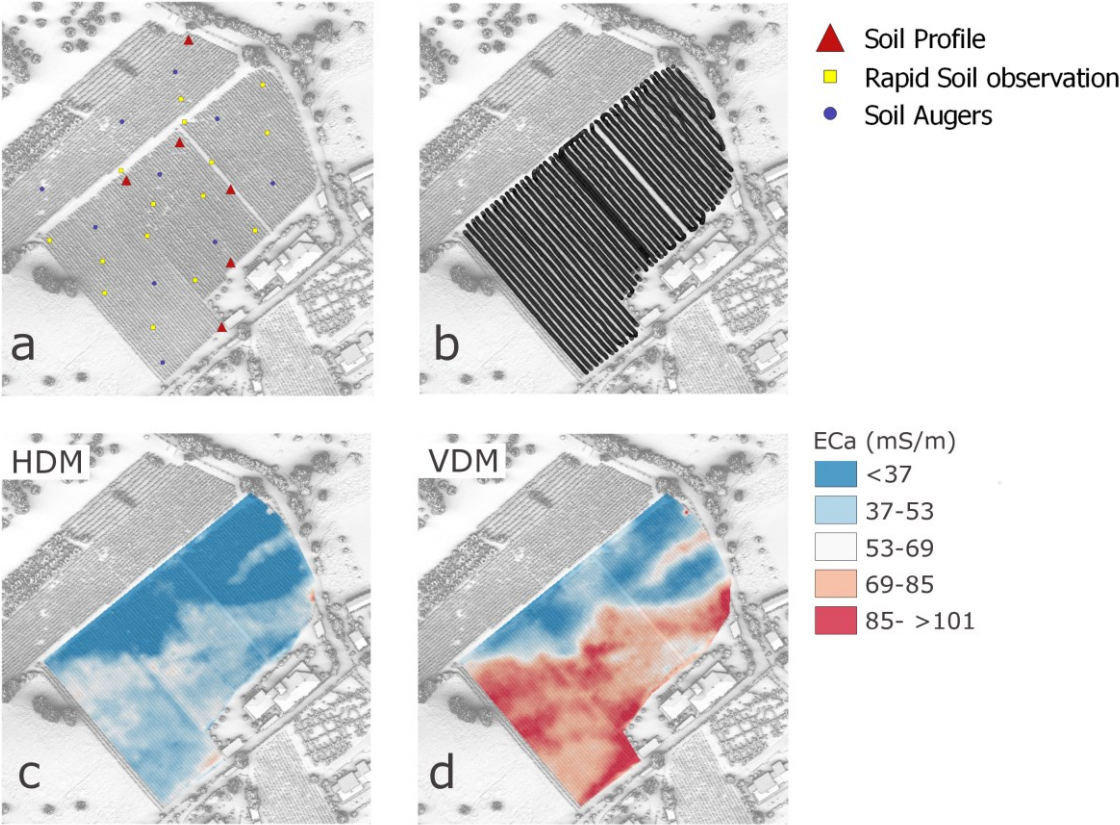


Fig. 3. a) Location of soil profiles, augers and rapid observation(minipits, augers); b) Local acquisition recorded by GPS; c) ECa map of Horizontal Dipole Mode (HDM); d) ECa map of Vertical Dipole Mode (VDM)

389
 390 The ECa maps obtained were used as baseline data in the pedological survey.
 391 The ECa maps (figures 3) showed that the vineyard was clearly characterized by the presence of two major patterns of
 392 ECa, generally homogenous, corresponding to two areas: (i) summit and upper slope (red area in fig. 3d) and (ii) down-
 393 slope (bluish area in fig. 3d). The ECa mean difference between the two areas was statistically significant ($P<0.05$). The
 394 difference between summit and upslope previously observed by the preliminary landscape analysis (on high resolution
 395 DTM), however, did not always correspond to the ECa mapping and, moreover, the boundaries between the two main
 396 areas identified by the ECa pattern is oblique (with respect to slope) and not linear as would be expected with DTM
 397 analysis.
 398 Landscape mapping unit analysis was combined with ECa mapping, observing ECa homogenous and heterogeneous
 399 areas and performing 25 qualitative rapid soil observation (minipits, augers). Six soil profiles and 10 augers were
 400 localized to include major variability (Fig. 3a). The soil profiles and augers were described and sampled. Bulk and
 401 undisturbed soil samples were collected from each described soil horizon and submitted for chemical and physical
 402 analysis.
 403 From the pedological characterization (76 soil samples in total, 51 from 6 soil profiles and 25 from augers; augers data
 404 are not shown), two main soil types were identified: Cambic Calcisol (Clayic, Aric) and Eutric Cambisol (Clayic, Aric,
 405 Colluvic) (WRB, 2014).
 406 These soils are likely to have evolved from a different parent material; the Cambisol evolved over colluvium (including
 407 traces of pumices), not present in the upper part of the vineyard, while the Calcisol evolved from the clayey sedimentary

408 bedrock. The different origin is also expressed by the soils color: brown (10YR) for the Cambisol and yellowish (5Y) for
 409 the Calcisol.
 410 Calcisol is richer in total carbonates than Cambisol (mean 232.7 g/kg and 41.2 g/kg respectively), with a Bk horizon at a
 411 depth of about 45 cm with the common accumulation of carbonates. This induces a differentiation of the pH between
 412 the two pedons (Calcisol mean 8.2; Cambisol mean 7.0). The organic Carbon Content (O.C) and Cation Exchange Capacity
 413 (CEC) were higher in the Cambisol (avg. values of O.C. in the topsoil was 1.0 and 2.1% for the Calcisol and Cambisol
 414 respectively; avg. value of CEC along the soil profile was 24.3 cmol*kg⁻¹ in the Cambisol and 16.8cmol kg⁻¹in the Calcisol).
 415 The apparent electrical conductivity (ECa) is generally low in both soils, highlighting the absence of significant quantities
 416 of salts in solution (173 and 246 mS cm⁻¹ for the Cambisol and Calcisol respectively). The texture is clay loam in both
 417 soils.
 418 The physical characteristics of two soil profiles, representative of the two soil types indicated, are reported in table 1.
 419 Despite the similar texture, the hydraulic properties measured in the lab showed some important differences (Tab. 1).
 420 Among them: i) Calcisol showed a pronounced vertical heterogeneity (i.e. the K₀ and I of the Bk horizon are very different
 421 from the adjacent upper and lower horizons); ii) Cambisol showed a relative vertical homogeneity, especially in the Bw
 422 horizons; iii) despite the fact that the porosity of Calcisol is higher than that of Cambisol (see saturated soil water
 423 contents, θ_0) the available water content (AWC) in the first 80 cm of soil depth was lower (i.e. Calcisol 80 mm and
 424 Cambisol 145 mm).
 425

Tab.1. Physical properties of Calcisol (CAL HZ) and Cambisol (CAM HZ)

Soil/HZ	Soil horizon and thickness (cm)		Particle size fraction			Rocks fragments	Hydrological properties				
			Clay	Silty	Sand		Θ_0	K ₀	α	I	n
			(g/100g)				(m ³ /m ³)	(cm/d)	(1/cm)		
Cambic Calcisol (Clayic, Aric)/ CAL	Ap1	0-10/20	31.9	38.1	30.1	a	0.575	669.3	0.642	-1.78	1.30
	Ap2	10/20-45	32.0	37.7	30.3	a	0.474	171.5	0.223	-3.44	1.10
	Bk	45-80	32.6	39.7	27.7	a	0.435	9.7	0.126	-12.81	1.10
	BC	80-105	33.8	39.3	27.0	a	0.390	995.0	0.074	1.46	1.23
	CB	105-130+	34.9	37.6	27.5	a	0.543	1000.0	0.078	0.50	1.23
Eutric											
Cambisol (Clayic, Aric, Colluvic)/ CAM	Ap	0-40	34.2	31.5	34.4	a	0.484	179.1	0.008	-1.00	1.45
	Bw1	40-90	37.6	30.0	32.5	b	0.462	2.3	0.003	-1.00	1.21
	Bw2	90-120	42.9	29.5	27.7	b	0.387	3.7	0.005	-1.00	1.15
	Bw3	120-160+	41.1	30.8	28.1	b	0.416	19.0	0.021	-2.70	1.17

426 *a= absent; b= few fine sub-rounded pumiceous stones*
 427

428 Integrating the soil and geophysical survey with the physical, hydrological and chemical soil analysis made it possible to
 429 separate two main Homogeneous Zones:
 430 CAL: Cambic Calcisol (Clayic, Aric) (Fig. 4) developing at the summit and in the upslope landscape position and
 431 CAM: Eutric Cambisol (Clayic, Aric, Colluvic) (Fig. 4) developing in the downslope landscape position.

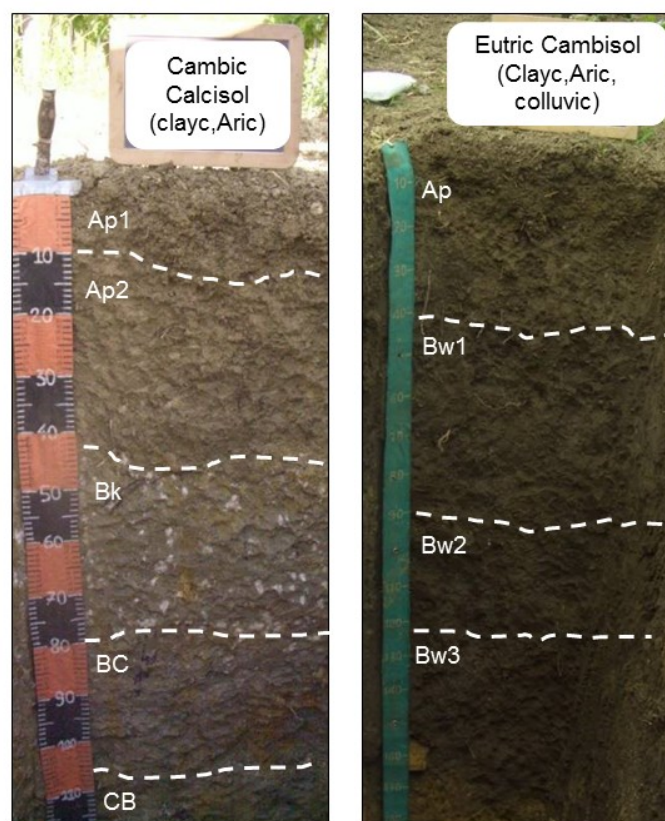


Fig. 4. The representative soils of CAL and CAM HZs: Cambic Calcisol and Eutric Cambisol respectively.

432

433 3.2 Modelling application (potential CWSI estimation)

434 The potential Crop water stress index (CWSI) data were obtained by analyzing the water balance in the soil–vegetation–
 435 atmosphere (SVA) system in the two HZs using the SWAP hydrological model applied over eleven years of daily climate
 436 data (2003–2013). This information is especially important because it helps evaluate the dynamics of the water stress of
 437 the soils present in the study area, representing a very powerful tool for vineyard planning.

438 In particular, the level of CWSI between the two HZs in each plant phenological phase (Fig. 2 and 5) can be compared,
 439 defining the functional Homogeneous Zones (fHZs) on the basis of their similarity in functional behavior in relation to
 440 vines and correlate it to different plant responses in terms of must quality and plant production.

441 On average, in CAL the potential CWSI was two times higher (13.9%) than CAM (5.9%), with clearly different increases
 442 during the cropping season (from flowering to harvesting) (Tab.2, Fig.2 and 5).

443 The maximum values of CWSI were obtained during berry formation with average values of 32.7% (+ 20.7) for CAL and
 444 13.5% (+9.6) for CAM.

445 From the results of potential CWSI analysis, it is clear that the two representative soils of the study area, under the same
 446 climate and plant conditions, show a different susceptibility to vineyard water stress. These results mean that the two
 447 identified CAL and CAM HZs behave as Homogeneous Zones also in terms of their functional behavior. To describe this
 448 output of the microzoning procedure from here onwards we shall refer to CAL and CAM functional Homogeneous Zones
 449 (fHZs) as CAL and CAM fHZs.

450 The statistical ANOVA analysis on $CWSI_{cum}$ over the seasons showed a significant difference, with an alpha of 0.02
 451 between the two soils. During the different phenological phases only the Berry ripening phase showed a significant
 452 differences with an alpha of 0.02. This behavior can be explained considering that both soils started the growing season
 453 with an optimum water content (accumulated during the winter), but during the season, the reduction of rainfall, the
 454 increase of ET_0 and the effect of plant water uptake emphasize the physical differences of these two SPA systems.
 455 Concerning the high variability of SD during berry ripening, the differences depend on different climate conditions, in

particular rainfall amount, during the 11 years analyzed. We can clearly identify two very dry years (2003 and 2007) and two very wet years (2005 and 2010).

During the simulated years, the average rainfall in the period from 18 August to 15 October was 105 mm with an SD of 46.9 (44% variation).

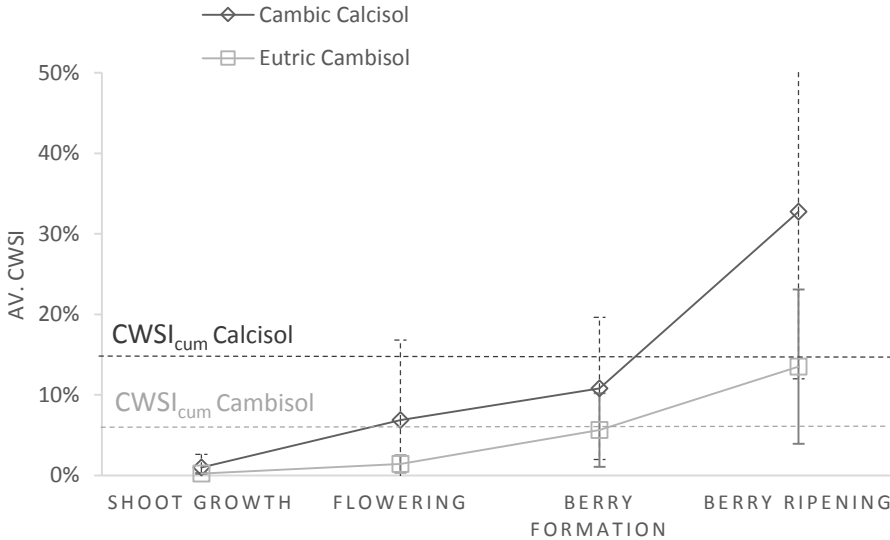


Fig. 5. The average values and standard deviation of the potential Crop Water Stress Index (CWSI) during the cropping season (reported in terms of phenological phases) of vines cultivated in the representative soils of homogeneous zones (CAL and CAM). The simulations were performed with SWAP models during the vintages from 2003 to 2013.

3.3 GIS analysis

Each functional Homogeneous Zone was then analyzed with respect to the variability of environmental characteristics derived from the high resolution DMS and DTM (Tab. 2; Fig. 6). The elevation and slope of CAL was higher compared to those of CAM; their mean difference is always significant ($P < 0.05$) and it was about 15 m for the elevation and 4.7 % for the slope gradient. These differences are consistent with both geomorphic and soil settings.

The aspect shows a Nord-West and West orientation respectively for CAL and CAM fHZs. This aspect difference ($P < 0.05$) induces - in the vineyard rows - a differentiation in terms of total potential insolation ($P < 0.05$) during the cropping season (1 April to 15 October) which is about 55 kWh/m² higher in the case of the CAM fHZ. Such differences are mainly due to the direct vineyard row insolation. This different insolation was tested directly on the Penman Monteith equation; results showed a negligible effect on evapotranspiration and then on CWSI, as predicted by the model. Probably a direct effect on grape bunches in terms of temperature could be realizable but this aspect was not treated in this work.

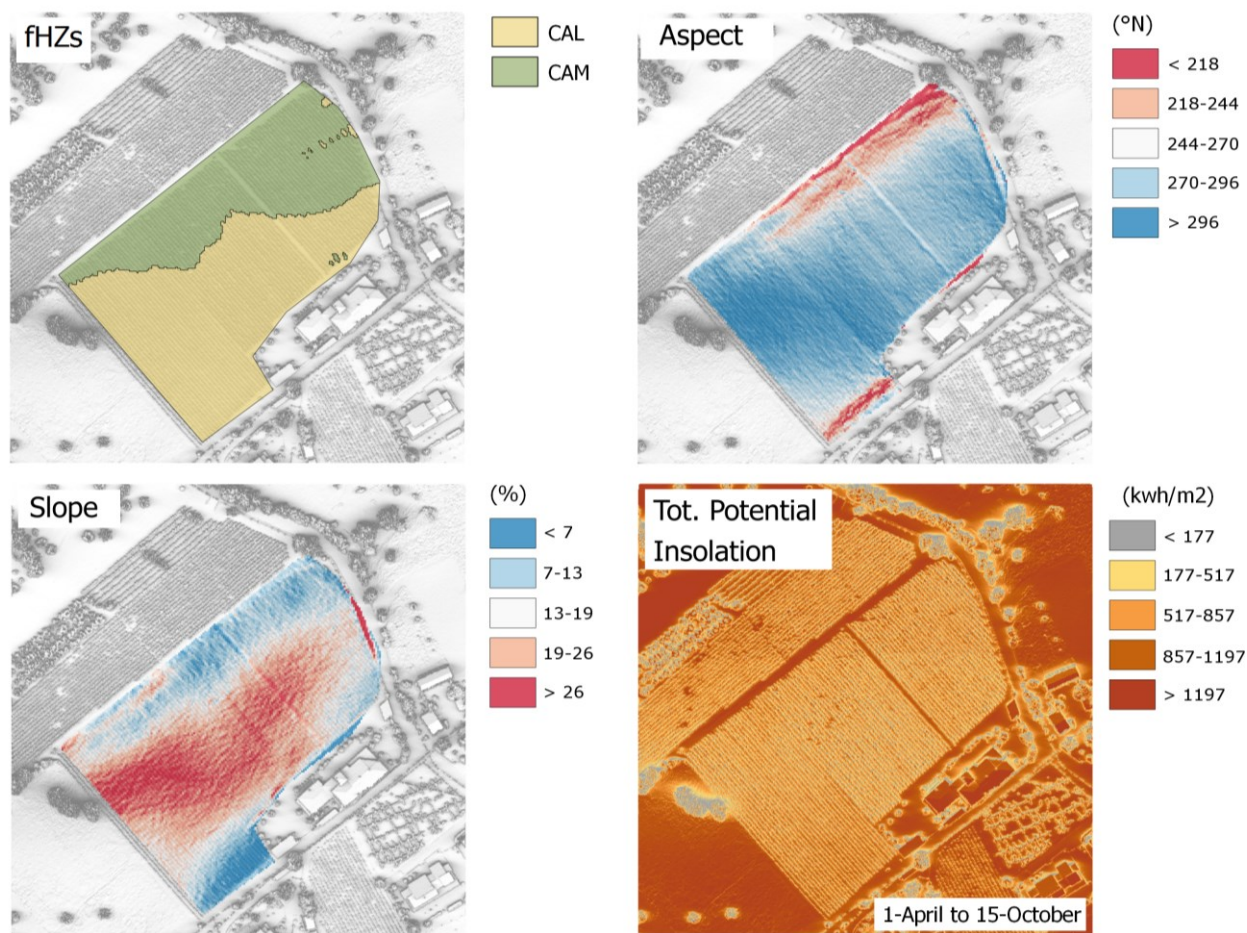


Fig. 6. The functional homogenous zones (fHZs) identified in the study area and the three maps derived from DSM and DTM analysis in a G.I.S environment: Aspect, Slope and Total Potential Insolation.

477

478 3.4 Vineyard records (crop/must measurements)

479 The experimental plots were identified inside the two fHZs and the phenological and physiological vine data were
480 collected on 27 plants (randomly sampled at each measurement date) over three years (2011-2013).

481 Even though the experimental plots had the same cultivar (Aglianico), the same rootstocks (1103P) and the same
482 management, the crop responses in terms of biomass development and must quality were very different.

483 Plants of CAM showed more vigour when compared to those of CAL (at fruit thinning, an average value of 11.1
484 bunches/plant versus 10.0 were measured, with a peak of 14.6 versus 8.7 bunches/plant in the year 2011). Despite a
485 very similar number of bunches/plant at harvesting (average value of 4.6 bunches/plant for CAM and CAL respectively),
486 at harvest time the plant production of CAM was generally higher (1.81 ± 0.29 kg/plant) compared to that of CAL (0.97
487 ± 0.36 kg/plant). The last results regarding the different berry weight and volume recognized during the three years
488 (Tab. 2) are in agreement.

489 The analyses carried out on grape bunches over the three years of measurement showed a very robust qualitative
490 differentiation between the two fHZs. Investigated parameters like sugar, anthocyanins, polyphenols in the skin, colour
491 intensity, tannins in the skin and pH were always higher in CAL during berry ripening if compared to CAM. However, the
492 titratable acidity, bunch volume and weight of 100 berries were lower in the CAL. The first results of microvinification
493 showed higher values of ethanol (12.2 %v for CAM and 13.3 %v for CAL), colour intensity (7.8 for CAM and 12.8 for CAL)
494 and tannins (2.9 g/l for CAM and 4.6 g/l for CAL) in CAL than in CAM.

495 ANOVA analysis showed that during the three years only the total anthocyanins and color intensity of the grape must
496 were significantly affected by soil characteristics ($p > 0.05$). These results are in agreement with previous findings
497 showing that moderate, and not severe, water stress or drought stress increases anthocyanins concentrations in berry
498 skins (Ojeda et al., 2002). Among the three years considered, 2013 stands out because the grapes showed a lower

499 content of sugars, a higher weight and a lower density of berries, mainly due to the fact that during 2013 the
500 temperatures were lower and the ripening season was rainy. As a consequence, degree-day accumulation was slower
501 and the berries larger due to their watering.

502 In both fHZs the minimum absolute values of LWP (-0.37 and -0.40 MPa in CAM and in CAL, respectively) were registered
503 at the beginning of crop season, while the maximum absolute values were reached at the end of August (-1.65 and -
504 1.85 MPa in CAM and in CAL, respectively). Nevertheless, during the three years of measurements the plants belonging
505 to Calcisol (CAL fHZ, up-slope) faced a more intense water stress than those in Cambisol (CAM fHZ, down-slope), during
506 the whole season. Consequently, stomatal conductance values during the three years agreed with those of LWP, with
507 the Calcisol plants experiencing lower values, and thus lower transpiration rates than those of Cambisol. Assimilation
508 rates followed the same behavior of stomatal conductance, highlighting that in CAM the plants had a more pronounced
509 photosynthetic activity than those of CAL; in agreement with that, also the quantum yield of photosystem PSII in leaves
510 adapted to light (PHI_{PSII}) showed that CAM plants were more efficient than CAL plants in capturing the energy of the
511 light absorbed by the photosystem PSII. Both photosynthetic activity and PHI_{PSII} responded proportionally to the
512 different chlorophyll a content, with the CAM plants showing the highest values. The Leaf Area index (LAI) was lower in
513 CAL plants (avg. 1.28) than in CAM plants (avg. 1.48), as a consequence of the more severe water stress suffered by
514 plants grown in the former. Moreover, during the three years of the experiment (2011-2013), the differences between
515 the two fHZs of all parameters monitored on the plant were significant, with $p < 0.001$ (T-test, Two-tailed). Only the LAI
516 showed a P value of 0.014.

Tab. 2. Summary of results obtained in CAL and CAM HZs and CAL and CAM fHZs: (i) GIS analysis on DSM and DTM; (ii) Simulation modelling application; (iii) Plant monitoring and the characteristics of bunches during the three years of monitoring (2011 to 2013) on Aglianico cv.

Environmental characteristics and plant responses			CAL HZ / CAL fHZ	CAM HZ / CAM fHZ
GIS Analysis	DTM (1 m)	Elevation (m.s.l.)	363.8 (± 6.5)	348.5 (± 6.5)
		Slope (%)	23.2 (± 6.9)	18.5 (± 5.9)
		Aspect (°N)	300.8 (± 20.0)	276.6 (± 26.2)
		TWI	-2.3 (± 1.2)	-2.4 (± 1.1)
	DSM (0.3 m)	Pot. direct insolation (kwh/m ²)*	635.9 (± 294.8)	708.1 (± 326.3)
		Pot. diffuse insolation (kwh/m ²)*	136.6 (± 20.9)	137.3 (± 21.0)
		Tot. Pot. insolation (kwh/m ²)*	789.9 (± 302.2)	845.4 (± 335.7)
Modelling - simulation - SWAP	CWSI _{cum} **	Shoot growth	1.0 % (± 1.6)	0.23% (± 0.0)
		Flowering	6.9 % (± 9.9)	1.4 % (± 10.6)
		Berry Formation	10.8 % (± 8.8)	5.7% (± 4.6)
		Berry ripening	32.7 % (± 20.7)	13.5 % (± 9.6)
		CWSI over cropping season	13.9 % (± 8.6)	5.9 % (± 3.9)
Plant monitoring***	Leaf Water Potential (LWP) (Mpa)	Mean	-1.12 (± 0.33)	-0.92 (± 0.27)
		Min (abs.)	-0.4	-0.37
		Max (abs.)	-1.85	-1.65
	Chlorophyll content of leaves (CCL)		13.9 (± 4.3)	18.6 (± 6.67)
	Phot. CO ₂ Assimilation (μmol m ⁻² s ⁻¹)		10.3 (± 6.0)	15.7 (± 5.9)
	Stomatal conductance (mol m ⁻² s ⁻¹)		0.15 (± 0.1)	0.23 (± 0.1)
	Instantaneous Water Use Efficiency iWUE(μmolmol ⁻¹)	Mean	81.6 (± 34.0)	72.3 (± 24.5)
	Leaf Area Index (m ² /m ²)		1.28 (± 0.30)	1.48 (± 0.46)
	Effectice quantum yield of photosystem PSII ΦPSII		0.11 (± 0.04)	0.15 (± 0.04)
Characteristics of bunch***	100 Berries	Weight (g)	205.7 (± 53.6)	221.7 (± 31.6)
		Volume (cm ³)	188.3 (± 50.5)	205.8 (± 27.6)
		Density (g/cm ³)	1.09 (± 0.02)	1.05 (± 0.05)
		Sugar (Brix°)	23.2 (± 0.7)	21.3 (± 1.1)
		pH	3.4 (± 0.09)	3.2 (± 0.14)
	Grape must	Titratable acidity (g/l)	6.6 (± 1.0)	7.7 (± 1.5)
		Color intensity	5.4 (± 1.0)	4.1 (± 0.09)
		Color hue	0.53 (± 0.02)	0.52 (± 0.01)
		Total anthocyanins (mg/kg)	627.6 (± 67.6)	471.3 (± 45.3)
	Grape skin	Tot. Polyphenols (mg/kg)	1874.1 (± 418.9)	1745 (± 258.8)
		Tot. Tannins (mg/kg)	2.4 (± 0.4)	2.5 (± 0.2)
	Grape seed	Tot. Polyphenols (mg/kg)	1851.3 (± 321.8)	1967.5 (± 329.6)
		Tot. Tannins (mg/kg)	1.8 (± 0.37)	1.8 (± 0.27)

* The potential insolation refers to the period 1 April to 15 October

** Average values calculated over 11 years (2003-2013)

*** Average over three seasons of measurements (2011 to 2013)

517
518

519 4 Discussion

520 The effects of soil combination and climate on vine responses in terms of must characteristics and wine quality are well
521 reported in literature as the basis of the terroir concept. With this work, conducted in a small study area, the usefulness
522 of the adopted microzoning procedure was tested by quantifying the effect of soil properties on plant responses and
523 must characteristics.

524 The effectiveness of the results achieved lies in the specific experimental setup that was conducted in the same
 525 geomorphic land system, under the same climate conditions (only 90 m of slope, with about 15 m difference in
 526 elevation) on the same plant cultivar (Aglianico monoclonal population) and under the same vine management.
 527 We believe that under these conditions, the large-scale soil survey supported by the EMI survey represented a very
 528 good cost/benefit approach to investigating vineyard potentialities in view of a soil-plant-climate relationships study.
 529 Indeed the EMI approach made it possible to immediately identify a homogeneous pattern on which to focus the
 530 sampling activities.
 531 The identification and mapping at vineyard scale of the main soil types included in the functional Homogeneous Zones,
 532 CAL fHZ, Cambic Calcisol (Clayic, Aric) and CAM fHZ, Eutric Cambisol (Clayic, Aric, Colluvic), allowed us to estimate and
 533 study the different behaviour, in terms of crop water stress, of these two soils in the soil-plant-climate system. This
 534 discriminated their different abilities in affecting the quality of a wine.
 535 The potential CWSI referred to the last eleven years was very different between the two HZs. The variability expressed
 536 by this index for each phenological phases was very high. This was due to the high variability of the weather data used
 537 as input for the simulation modelling application.
 538 These important differences between the soil-crop-climate behaviour are mainly due to the different hydrological
 539 behaviour, because of the very different hydraulic properties of the soil (see Table 1).
 540 It is essential to notice that the use of simulation models like the one used for this study requires an accurate phase of
 541 model calibration and preferably the use of measured data, rather than those estimated by methods (such as
 542 pedofunctions) that usually tend to smooth out the soil hydrological properties between otherwise very different soils.
 543 This is also the case if the AWC is used as an indicator for crop water availability: the use of PFT could produce a clear
 544 mistake, also if the studied soils present similar texture, as reported in section 3.1.
 545 This was our case, where the two soils fell under the same textural class while having very different hydrological
 546 behavior. Hence, the measurement of the hydrological properties was of primary importance in differentiating the two
 547 environments.
 548 The behaviour of each soil-plant and atmosphere system (CAL and CAM) was investigated in depth, making the
 549 conclusion about their different ability to produce crop water stress very solid. Thus, it was possible to identify two
 550 functional Homogeneous Zones, corresponding to the previous HZs.
 551 The CAL fHZ represents a system where the Aglianico is subjected to a water stress that is twice as strong as that
 552 occurring in the Cambisol fHZ, with a progressive differentiation from flowering to harvesting.
 553 This is clearly in agreement with the water stress felt by plants during the three years of monitoring (avg. 22% of LWP
 554 increase in the CAL). In addition, the r Pearson of CWSI estimated by the model and by the LWP measured on-field was
 555 -0.98. Moreover, the different behaviour described by the potential CWSI was also confirmed by other plant
 556 physiological measurements including: (i) stomatal conductance (the plants in CAL experienced lower values, and thus
 557 lower transpiration rates, than those of CAM), (ii) assimilation of CO₂ rates (in CAM the plants had a more pronounced
 558 photosynthetic activity than those of CAL) and (iii) the quantum yield of photosystem PSII in leaves adapted to light
 559 (PHIPSI) (plants in CAM were more efficient than CAL plants at capturing the light energy absorbed by the photosystem
 560 PSII).
 561 From the enological viewpoint, grapes analyzed in this study showed important differences. In CAL fHZ, the grapes were
 562 richer in sugars, anthocyanins, total polyphenols and had a lower content of total acids. Considering that Aglianico
 563 wines, as traditionally produced, are generally rather acid, astringent and easily downfall red colour (Gambuti et al.,
 564 2007), then these data clearly suggest that grapes belonging to CAL fHZ can produce wine with a more balanced taste
 565 that is more alcoholic and less acidic.
 566 Grapes from CAL fHZ showed a higher extractable polyphenol content than those from CAM fHZ, indicating that a more
 567 aged wine can be obtained from this part of the vineyard. On the basis of grape sugar content, wines obtained from this
 568 fHZ should be also characterized by a higher content of ethanol (13.5% v/v with respect to 12% v/v for CAM fHZ wines)
 569 and should show a more intense colour because of the content of native pigments (anthocyanins) extracted from skins
 570 and their colour intensity. In contrast, CAM fHZ berries showed a lower content of total anthocyanins extracted from
 571 skins and a similar content of total polyphenols and tannins extracted from seeds. Taking into account the facts that: i)
 572 anthocyanins are mainly extracted during the first phases of red vinification (consisting in the maceration of whole
 573 berries during must fermentation), ii) complete extraction from the seeds requires the berry skins and seeds to be in

574 contact for a longer time with must-wine, and iii) seed tannins are more astringent than skin tannins (Gambutì et al.,
575 2006), these data suggest that a specific winemaking procedure, such as short maceration, could help obtain from CAM
576 fHZ grapes a red wine with a good colour intensity, which is not astringent and which is easier to drink.
577 Therefore, the enological potentials of grapes belonging to the two sites are very different. By applying the proper
578 winemaking procedure it is possible to obtain a more ready-to-drink wine from the CAM fHZ site and a long ageing wine
579 from the CAL fHZ site.
580 In conclusion, the use of a model output is a useful approach to evaluating and comparing the effects of the CWS in
581 vines induced by soils.
582 Anyhow, important prerequisites that should be considered are: i) model calibration (if previous data are available to
583 calibrate it), ii) preferably measured data, iii) same plant cultivar and iv) same climatic and plant management
584 conditions. This was our case, built up to investigate and compare the "soil suitability to grape production", limiting the
585 effects of other environmental variables. This comparison would not have been feasible with different cultivars (each
586 of which responds differently to water stress), or different boundary conditions.
587 Moreover, our approach could be improved towards the precision farming considering the soil spatial variability inside
588 of each fHZs in the modelling application, thereby providing also an information about the uncertainty of model
589 predictions. But, the used of latter approach is strictly limited by the availability of soil information spatially distributed
590 needed to apply the simulation model (verticals and horizontal information, e.g. soil horizons depth and thickness and
591 their hydraulic properties).
592 However, the great potential of the dynamic simulation models applied in this context can be seen. In fact, once the
593 characteristics and parameters of the different SPA systems (i.e. LAI, climate data, cultivar relation between CWSI and
594 quality must parameters, etc.) are known, it is potentially possible to estimate, as done in this work, what could be the
595 plant responses to water stress and therefore its effects in must and wine quality, in any soil-plant combination or in
596 any boundary conditions, including plant responses to future climate changes. This could have imaginable positive
597 effects on future land use and management planning, for instance the choice of the most suitable plant varieties for
598 specific production targets or the opportunity to apply drip irrigation systems in order to control the plant water
599 status with the aim of improving quality or maintaining the current level. This concept is very similar to the approach
600 reported in literature for other crops between the yield response and water stress (or water deficit) (see Menenti et
601 al., 2014, or Monaco et al., 2014).

602 Finally, the GIS analysis of high resolution DTM and DSM showed that differences in terms of slope and elevation
603 between the two identified fHZs, at vineyard scale, were low and not very important. On the other hand, the aspect and
604 the potential insolation calculated over the cropping season (1 April to 15 October) showed that in the CAM fHZ the
605 plants receive 7% or more total potential insolation during the cropping season compared to those cultivated in the CAL
606 fHZ. This condition strengthens our results and confirms the hypothesis that for the scale of our work, soil drives the
607 Aglianico plant expression in terms of must quality and then wine quality.

608 5 Conclusions

609 The procedures adopted for viticulture microzoning which include (i) standard large-scale soil mapping, (ii) geophysical
610 mapping and (iii) soil-plant water stress evaluation on the identified fHZs, have shown their robustness in terms of their
611 effects on plant, grape, must and wine quality.
612 The inclusion of the soil-plant water stress evaluation was fundamental because plant water status affects the
613 characteristics of the grape must, skin and seeds of the Aglianico vine.
614 In particular the study has shown: i) the importance of the hydrogeology approach in knowing the soil properties, in
615 order to come to a complete characterization of the different pedo-environments (also recognizable at field scale) aimed
616 at viticultural zoning, equal to the well-recognized importance for soil chemical properties; ii) the link between must
617 characteristics and soil characteristics, particularly CWSI estimated using a simulation model. This can be considered as
618 preliminary information for zoning and planning the vineyard plant (e.g. without having local data for calibrating and
619 validating the model); iii) the need to transform the soil map into a functional map in the viticultural zoning procedures,
620 where the soils are evaluated dynamically on the basis of soil-plant and atmosphere system behaviour (e.g. soil water

balance), with the definition of functional homogeneous zones (fHZs) for the vine; and (iv) the potentiality of this approach to explore future prospects in terms of more effective grape variety selection and precision irrigation application to overcome the high CWSI values expected from climate change.

Acknowledgements

We acknowledge Dr.A. Erbaggio, P. Caputo, A. Delle Cave for the field measurements and Mrs Orefice for soil hydraulic properties measurements.

6 References

- Acevedo-Opazo, C., Ortega-Farias, S.: Effects of grapevine (*Vitis vinifera* L.) water status on water consumption, vegetative growth and grape quality: An irrigation scheduling application to achieve regulated deficit irrigation. *Agricultural Water Management*. 97, 956-964, 2010.
- Andrenelli, M.C., Costantini, E.A.C., Pellegrini, S., Perria, R. and Vignozzi, N.: On-the-go resistivity sensors employment to support soil survey for precision viticulture, In: *Proceedings in VIII International Terroir Congress*, Soave, Italy, 14-18 June 2010, 120-125, 2010.
- Basile, A., Buttafuoco, G., Mele, G., Tedeschi, A. : Complementary techniques to assess physical properties of a fine soil irrigated with saline water, *Environmental Earth Sciences*, 66(7), 1797-1807, 2012.
- Ben-Asher, J., van Dam, J., Feddes, R.A., Jhorar, R.K.: Irrigation of grapevines with saline water II. Mathematical simulation of vine growth and yield. *Agricultural Water Management*, 83: 22-29, 2006.
- Bonfante A., Basile A., Acutis M., De Mascellis R., Manna P., Perego A., Terribile F.: SWAP, CropSyst and MACRO comparison in two contrasting soils cropped with maize in Northern Italy, *Agr. Water Manage.*, Elsevier, 97, 1051-1062, 2010.
- Bonfante, A., Basile, A., Langella, G., Manna, P., Terribile, F.: A physically oriented approach to analysis and mapping of terroirs, *Geoderma*, 167-168, 103-117, 2011.
- Brousset, Jm., Picque, D., Guerin, L., Goulet, E., Perrot, N. : Potentiel des sols viticoles et qualité des vins, In: *Proceedings in VIII International Terroir Congress*, Soave, Italy, 14-18 June 2010, 96-101, 2010.
- Carey, V.A. : Spatial characterisation of natural terroir units for viticulture in the Bottelaryberg-Simonsberg-Helderberg winegrowing area, M.Sc. Agric Thesis, University of Stellenbosch, 90pp + annexes, 2001.
- Chapman, D.M., Roby, G., Ebeler, S.E., Guinard, J.X., Matthews, M.A.: Sensory attributes of Cabernet Sauvignon wines made from vines with different water status. *Australian Journal of Grape and Wine Research*, 11 (3), 339-347, 2005.
- Cousin, I., Besson, A., Bourennane, H., Pasquier, C., Nicoullaud, B., King, D., Richard G.: From spatial-continuous electrical resistivity measurements to the soil hydraulic functioning at the field scale, *C.R. Geosci.*, 341, 859-867, 2009.
- Crescimanno, G., Garofalo, P.: Application and evaluation of the SWAP model for simulating water and solute transport in a cracking clay soil. *Soil Science Society of Am. J.*, 69, 1943-1954, 2005.
- Davies, R.: Mapping soil properties for irrigation development in the River land of south Australia using EM38, In: *Proc. 3rd Australian and New Zeland Soils Conf., SuperSoil 2004*, University of Sydney, Australia, CD-Rom, 2004.
- Deloire, A., Vaudour, E., Carey, V., Bonnardot, V., Van Leeuwen, C. : Grapevine responses to terroir: a global approach, *J. Int. Sci. Vigne Vin.*, 39 (4), 149–162, 2005.

671 Doolittle, J., Petersen, M., Wheeler, T.: Comparison of two electromagnetic induction tools in salinity appraisals, *J. Soil*
672 *Water Conserv.*, 56, 257-262, 2001.

673

674 Eitzinger, J., Trnka, M., Hösch, J., Žalud, Z., Dubrovský, M.: Comparison of CERES, WOFOST and SWAP models in
675 simulating soil water content during growing season under different soil conditions. *Ecological Modelling*, 171, 223-246,
676 2004.

677

678 Failla, O., Mariani, L., Bracadoro, L., Minelli, R., Scienza, A., Murada, G., Mancini, S.: Spatial distribution of solar radiation
679 and its effect on vine phenology and grape ripening in an Alpine environment, *Am. J. Enol. Viticult*, 55, 128–138, 2004.

680

681 FAO : World Reference Base for Soil Resources: International soil classification system for naming soils and creating
682 legends for soil maps, *World Soil Resources Reports*, 106, FAO, Rome, 2014.

683

684 FAO: World Reference Base for Soil Resources: A framework for international classification, correlation and
685 communication, *World Soil Resources Reports*, 103, FAO, Rome, 2006.

686

687 Feddes, R.A., Kowalik, P.J., Zaradny, H.: Simulation of field water use and crop yield, *Simul. Monogr. PUDOC*,
688 Wageningen, the Netherlands, 1978.

689

690 Fregoni, M. : *Viticultura di Qualità*, eds. *Informatore Agrario*, 23/E-37133, Verona (IT), 1988.

691

692 Gambuti, A., Rinaldi, A., Pessina, R., Moio, L.: Evaluation of aglianico grape skin and seed polyphenol astringency by
693 SDS–PAGE electrophoresis of salivary proteins after the binding reaction. *Food chemistry*, 97(4), 614-620, 2006.

694

695 Gambuti, A., Strollo, D., Erbaggio, A., Lecce, L., Moio, L. : Effect of winemaking practices on color indexes and selected
696 bioactive phenolics of Aglianico wine, *Journal of food science*, 72(9), 623-628, 2007.

697

698 Genty, B., Briantais, J.M., Baker, N.R. : The relationship between the quantum yield of photosynthetic electron transport
699 and quenching of chlorophyll fluorescence. *Biochim. Biophys. Acta* 990, 87-92, 1989.

700

701 Girard, M.C. and Girard C.M. : Processing of remote sensing data, Balkema publishers, Rotterdam, 2003.

702 Gladstones, J. and Smart, R.E.: Terroir, In: *The Oxford companion to wine*, Robinson, J. (Ed.), American Journal of Enology
703 and Viticulture, 38, pp. 211–215, 1997

704

705 Glories, Y. : *La couleur des vins rouges*, 1° e 2° partie, *Conn. Vigne Vin.*, 18, 253-271, 1984.

706

707 Heathman, G.C., Starks, P.J., Ahuja, L.R., Jackson, T.J.: Assimilation of surface soil moisture to estimate profile soil water
708 content. *Journal of Hydrology*, 279, 1-17, 2003.

709

710 Intrigliolo, D.S., Castel, J.R.: Interactive effects of deficit irrigation and shoot and cluster thinning on grapevine cv.
711 Tempranillo. *Water relations, vine performance and berry and wine composition. Irrigation Science*, 29, 443-454, 2011.

712

713 Kozak M., Gozdowski, D., Wyszynski, Z.: An approach to analyzing a response variable as affected by its additive
714 components: Example for spring barley grain yield, *Cereal Res. Commun.*, 34, 981–988, 2006.

715

716 Kroes, J.G., van Dam, J.C., Groenendijk, P., Hendriks, R.F.A., Jacobs, C.M.J.: SWAP version 3.2. Theory description and
717 user manual, Alterra-report 1649, 262 pp, Alterra, Research Institute, Wageningen, The Netherlands, 2008.

718

719 Loague, K., Green, R.E.: Statistical and graphical methods for evaluating solute transport models: overview and
720 application. *Journal of contaminant hydrology*, 7 (1), 51–7, 1991.

721

722 Lück E., Gebbers, R., Ruehlmann, J., Spangenberg, U.: Electrical conductivity mapping for precision farming, *Near Surf.*
723 *Geophys.*, 7, 15-25, 2009.

724

725 Matthews, M.A., Ishii, R., Anderson, M.M., O'Mahony, M.: Dependence of wine sensory attributes on wine water status,
726 *Journal of the Science of Food and Agriculture*, 51, 321-335, 1990.

727

728 Mattivi, F., Prast, A., Nicolini, G., Valenti, L.: Validazione di un nuovo metodo per la misura del potenziale polifenolico
729 delle uve rosse e discussione del suo campo di applicazione in enologia, *Riv. Vitic. Enol.*, 2/3, 55-74, 2002.
730

731 Menenti, M., Alfieri, S.M., Bonfante, A., Riccardi, M., Basile, A., Monaco, E., De Michele, C, De Lorenzi, F.: Adaptation of
732 Irrigated and Rainfed Agriculture to Climate Change: The Vulnerability of Production Systems and the Potential of
733 Intraspecific Biodiversity (Case Studies in Italy). In "Handbook of Climate Change Adaptation". Springer-Verlag Berlin
734 Heidelberg. DOI 10.1007/978-3-642-40455-9_54-1, 2014.
735

736 Mertens, J., Madsen, H., Kristensen, M.: Sensitivity of soil parameters in unsaturated zone modelling and the relation
737 between effective, laboratory and in situ estimates. *Hydrological Processes*, 19, 1611-1633, 2005.
738

739 Minacapilli, M., Agnese, C., Blanda, F., Cammalleri, C., Ciraolo, G., D'Urso, G., Iovino, M., Pumo, D., Provenzano, G., and
740 Rallo, G.: Estimation of actual evapotranspiration of Mediterranean perennial crops by means of remote-sensing based
741 surface energy balance models, *Hydrol. Earth Syst. Sci.*, 13, 1061-1074, doi:10.5194/hess-13-1061, 2009.
742

743 Monaco, E., Bonfante, A., Alfieri, S.M., Basile, A., Menenti, M., De Lorenzi, F.: Climate change, effective water use for
744 irrigation and adaptability of maize: A case study in southern Italy, *Biosystems Engineering* 128: 82-99, 2014.
745

746 Morari, F., Castrignanò, A., Pagliarin, C.: Application of multivariate geostatistics in delineating management zones
747 within a gravelly vineyard using geo-electrical sensors, *Comput. Electron. Agric.*, 68, 97-107, 2009.
748

749 Mualem, Y.: A new model for predicting the hydraulic conductivity of unsaturated porous media, *Water Resources*
750 *Research*, 12 (3), 513–522, 1976.
751

752 OIV: Compendium of International Methods of Wine and Must Analysis, Office International de la Vigne et du Vin, Paris,
753 2007.
754

755 Ojeda, H., Andary, C., Kraeva, E., Carbonneau, A., & Deloire, A.: Influence of pre-and postveraison water deficit on
756 synthesis and concentration of skin phenolic compounds during berry growth of *Vitis vinifera* cv. Shiraz. *American*
757 *Journal of Enology and Viticulture*, 53(4), 261-267, 2002.
758

759 Priori, S., Costantini, E.A.C., Agnelli, A., Pellegrini, S., Martini, E.: Three proximal sensors to estimate texture, skeleton
760 and soil water storage in vineyards, In: *Proceedings in VIII International Terroir Congress*, Soave, Italy, 14-18 June 2010,
761 38-43, 2010.
762

763 Priori, S., Martini, E., Andrenelli, M.C., Magini, S., Agnelli, A.E., Bucelli, P., Biagi, M., Pellegrini, S., Costantini, E.A.C.:
764 Improving Wine Quality through Harvest Zoning and Combined Use of Remote and Soil Proximal Sensing, *Soil Sci. Soc.*
765 *Am. J.*, 77, 1338–1348, 2012.
766

767 Rallo, G., Agnese, C., Minacapilli, M., and Provenzano, G.: Comparison of SWAP and FAO Agro-Hydrological Models to
768 Schedule Irrigation of Wine Grapes." *J. Irrig. Drain Eng.*, 138 (7), 581–591, 2012.
769

770 Reynolds, W.D., Elrick, D.E., Youngs, E.G., Amoozegar, A., Booltink, H.W.G. & Bouma, J.: Saturated and field-saturated
771 water flow parameters, In: Dane, J.H. & Topp, G.C. (eds): *Methods of soil analysis, Part 4, Physical methods*, 797–878,
772 Madison, Wi: Soil Science Society of America, 2002.
773

774 Ribereau-Gayon, P., Stonestreet, E.: Le dosage des tanins du vin rouge et la détermination de leur structure. *Chimie*
775 *Anal.*, 48, 188-192, 1966.
776

777 Ribereau-Gayon, P., Stonestreet, E.: Le dosage des anthocyanes dans les vins rouges, *Bull. Soc. Chim*, 9, 2649-2652, 1965.
778

779 Ritchie, J.T.: Model for predicting evaporation from a row crop with incomplete cover, *Water Resour. Res.*, 8, 1204-
780 1213, 1972.
781

782 Romero, P., Gil-Muñoz, R., del Amor, F.M., Valdés, E.: Regulated deficit irrigation based upon optimum water status
783 improves phenolic composition in Monastrell grapes and wines. *Agricultural Water Management*, 121, 85-101, 2013.
784

785 Saey, T., Simpson, D., Vermeersch, H., Cockx, L., Van Meirvenne, M.: Comparing the EM38-DD and Dualem-21S sensors
786 to depth-to-clay mapping, *Soil Sci. Soc. Am. J.*, 73, 7-12, 2009.
787
788 Samouëlian, A., Cousin, I., Tabbagh, A., Bruand, A., Richard, G.: Electrical resistivity survey in soil science: a review, *Soil*
789 *Tillage Res.*, 83, 173-193, 2005.
790
791 Sheikh, V., van Loon, E.E.: Comparing performance and parameterization of a one-dimensional unsaturated zone model
792 across scales. *Vadose Zone Journal*, 6, 638-650, 2007.
793
794 Singh, R.: Water productivity analysis from field to regional scale: integration of crop and soil modelling, remote sensing
795 and geographical information. PhD. Diss. Wageningen Univ., Wageningen, The Netherland. 2005.
796
797 Taylor, S.T. and Ashcroft, G.L.: *Physical edaphology: The physics of irrigated and non-irrigated soils*. W.H. Freeman, San
798 Francisco, CA, 1972.
799
800 Tromp-van Meerveld, H.J. and McDonnell, J.J.: Assessment of multi-frequency electromagnetic induction for
801 determining soil moisture patterns at hillslope scale, *J. Hydrol.*, 368, 56-67, 2009.
802
803 Vacca, V., Del Caro, A., Millela, G.G., Nieddu, G.: Preliminary characterisation of Sardinian red grape cultivars
804 (*Vitisvinifera* L.) according to their phenolic potential, *S. Afr. J. Enol. Vitic.*, 30, (2), 93-100, 2009.
805
806 Van Genuchten, M.Th.: A closed form equation for predicting the hydraulic conductivity of unsaturated soils, *Soil sci.*
807 *Soc. Am. J.*, 44, 892-898, 1980.
808
809 Van Leeuwen, C., Tregoat, O., Choné, X., Bois, B., Pernet, D., Gaudillère, J.-P.: Vine water status is a key factor in grape
810 ripening and vintage quality for red Bordeaux wine. How can it be assessed for vineyard management purposes. *J. Int.*
811 *Sci. Vigne Vin*, 43(3): 121–134, 2009.
812
813 Vaudour E. and Shaw A.B.: A Worldwide Perspective on Viticultural Zoning, *S. Afr. J. Enol. Vitic.*, 26, No.2, 106-115, 2005.
814
815 Vaudour, E. : *Les terroirs viticoles, Définitions, caractérisation et protection*. Dunod, Paris, 2003.
816
817 Vaudour, E. : *Les terroirs viticoles. Analyse spatiale et relation avec la qualité du raisin. Application au vignoble AOC des*
818 *Côtes-du-Rhône méridionales*, Thèse de doctorat, Institut national agronomique Paris-Grignon, Paris, 2001.
819
820 Vaudour, E., Carey V.A., Gilliot, J.M.: Digital zoning of South African viticultural terroirs using bootstrapped decision
821 trees on morphometric data and multitemporal SPOT images, *Remote Sensing of Environment* 114, 2940–2950, 2010.
822
823 von Caemmerer, S. and Farquhar, G.D. : Some relationships between the biochemistry of photosynthesis and the gas
824 exchange of leaves, *Planta* 153, 376–387, 1981.
825
826 Wegehenkel, M.: Validation of a soil water balance model using soil water content and pressure head data. *Hydrological*
827 *processes*, 19, 1139-1164, 2005.
828
829
830