

The use of soil electrical resistivity to monitor plant and soil water relationships in vineyards.

Luca Brillante ¹, Olivier Mathieu ¹, Benjamin Bois ^{1,2}, Cornelius van Leeuwen ³,
and Jean Lévêque ¹

¹UMR CNRS 6282 Biogéosciences, Université de Bourgogne, 6 Boulevard Gabriel, F-21000
Dijon, France

²Institut Universitaire de la Vigne et du Vin "Jules Guyot", Rue Claude Laudrey, BP 27877,
F-21078 Dijon, France

³Bordeaux Sciences Agro, ISVV, Ecophysiology and Functional Genomics of Grapevines, UMR
1287, Université de Bordeaux, Villenave d'Ornon, F-33140, France

Correspondence to: Luca Brillante (brillanteluca@live.it)

Abstract. Soil water availability deeply affects plant physiology. In viticulture it is considered as a major contributor to the "terroir" effect. The assessment of soil water in field conditions is a difficult task especially over large surfaces. New techniques, are therefore required to better explore variations of soil water content in space and time with low disturbance and with great precision. Electrical Resistivity Tomography (ERT) meets these requirements, for applications in plant sciences, agriculture and ecology. In this paper, possible techniques to develop models that allow the use of ERT to spatialise soil water available to plants are reviewed. An application of soil water monitoring using ERT in a grapevine plot in Burgundy (north-east of France) during the vintage 2013 is presented. We observed the lateral heterogeneity of ERT derived Fraction of Transpirable Soil Water (FTSW) variations, and differences in water uptake depend on grapevine water status (leaf water potentials measured both at predawn and at solar noon and contemporary to ERT monitoring). Active zones in soils for water movements were identified. The use of ERT in ecophysiological studies, with parallel monitoring of plant water status, is still rare. These methods are promising because they have the potential to reveal a hidden part of a major function of plant development: the capacity to extract water from the soil.

1 Introduction

In viticulture and oenology it is acknowledged that the natural environment has a major impact on the yield and vegetative growth of grapevines and therefore on the sensory attributes of the final product. This link between the characteristics of a wine and its origin is called the "terroir effect"

20 (van Leeuwen and Seguin, 2006). It has been studied on a scientific basis since the 1960s (Seguin,
1969). This relationship is not mediated through the effect of particular soil minerals or flavour
compounds, although the popular wine press often erroneously describes it thus (van Leeuwen and
Seguin, 2006). The terroir effect must be sought in interactions at the ecosystem level. Major factors
in the terroir effect are the supplies of water and nitrogen (van Leeuwen, 2010). Water and nitrogen
25 are major drivers of vine physiology at the whole-plant level. This paper focuses on soil and vine
water relationships.

Soil is not a homogeneous medium, and is therefore not explored by roots in a homogeneous
way. Hence, during drought, soil cannot dehydrate in a homogeneous way. It is surprising that such
evidence is often neglected, and that available soil water capacity is generally considered as a soil
30 characteristic, independently from the plant. The highly variable spatio-temporal distribution of wet
and dry zones in soils has profound physiological implications for plants. Indeed, while chemical
and hydraulic root signals are produced in moderately dry soil regions, the part of roots in wet
soil regions ensures the water supply, and therefore transpiration and photosynthetic activity. Partial
Rootzone Drying (PRD) is an irrigation concept based on this knowledge (Dry et al., 1996; Loveys
35 et al., 2000; Stoll et al., 2000). It maintains reasonably high yields, because vines pick up water from
the wet soil zones, while quality is high, because roots produce ABA in the dry zones of the soil
profile. In natural conditions, such spatial soil water heterogeneity can also be found. The magnitude
of such variations in soil moisture and their impact on vine physiology has rarely been (among few,
Bauerle et al., 2008). They might play a key role in terroir effect. In a recent review, Schultz and Stoll
40 (2010) remarked that soil water (SW) monitoring is a challenging task, because root distribution is
generally unknown and therefore it is difficult to understand how much water is effectively absorbed
in each soil layer.

The reason why such spatial variations in soil water availability have rarely been considered is
that at today, soil water measurements are generally obtained with in-soil devices such as Time
45 Domain Reflectometry (TDR), which can be difficult to carry out in field conditions. Furthermore,
these devices only measure a very small volume of the soil, and even when increasing the number
of probes, no information is generally obtained about the lateral variation of SW, and only a vertical
soil moisture profile can be established. In addition, the number of such devices cannot be increased
indefinitely without major perturbations of the system and attaining prohibitive costs. Geophysical
50 imaging techniques, which are rapid, cost effective and low perturbs the soil, have recently been
proposed as a good proxy for the spatialisation of soil water measurements (Michot et al., 2003; Beff
et al., 2013; Garré et al., 2011, to name but a few). Being the technique recent a generalised method
does not exist, neither exists a review of the possible approaches to spatially measure soil water
and its availability through these geophysical techniques, and especially those based on Electrical
55 Resistivity (ER) which are the most promising. This review is the aim of the present work.

Here, the grapevine physiological response to drought will be briefly reviewed, with special regard to plant and soil relationships, and to soil properties that affect plant water status. Then, the concept of soil-water availability to plants will be discussed. Finally the contribution of geophysical methods, and in particular ER, to the study of plant and soil water relationships in vineyards will be discussed. These tools are very promising for the quantification and visualisation of plant and soil water relationships.

Part I. A review about the use of ERT to spatially quantify soil water and its availability to plants

2 Plant and soil water relations in terroir

The effect of water on fruit production has received great interest because it directly affects both the quantity and quality of the final product. Water deficits have a physiological impact at the whole-plant level. The need to acquire knowledge on plant-soil-atmosphere water relations is further increased by the current context of global warming. A number of studies have therefore flourished on the subject in recent years and, among trees, grapevines can now be considered as model plants from both the physiological and molecular points of view. Among the reasons for such success can be mentioned here the great progress made in grapevine genomics (Jaillon et al., 2007) and the long history of ecophysiological research for this plant. A complete physiological and molecular update can be found in Lovisolo et al. (2010). In this section we will provide only a brief overview of water relationships between plants and soils and their effects on terroir.

In grapevine a moderate water deficit reduces berry size and increases technological quality (higher sugar levels and lower acidity, for example). The reason is that the vegetative and reproductive organs are competing sinks for carbohydrates produced by photosynthesis. Apexes are the most important sinks when fruits are not present. When fruits develop, they become progressively more important sinks for carbohydrates. During water stress apexes reduce and then stop their growth, but the reduction in the vegetative growth varies across vegetative organs and physiological processes (Pellegrino et al., 2005a). If shoot growth stops before veraison, there is no competition for carbohydrates between fruits and apexes during ripening. Red wines benefit from a moderate water deficit, while sparkling or white wines do not, and so also table grapes (Sadras and Schultz, 2012). Soils favourable to the installation of a moderate water deficit during the summer, which are generally well suited to the production of high quality red wines, have been described in France (Seguin, 1975; Chone et al., 2001; van Leeuwen et al., 2009), Italy (Storchi et al., 2005; Tomasi et al., 2013), Hungary (Zsófi et al., 2009), USA (Chapman et al., 2005) and in many other regions in the world. Research into the effect of water deficit on the quality of white wines is rare, but one such study has been made by des Gachons et al. (2005). The effect of water deficit on grape quality potential can be negative, because it causes an increase in phenolic compounds, which is not considered favourable

for the quality of white wine Sadras and Schultz (2012). White wine also need a certain level of acidity, which is rapidly degraded during water deficit (Ollat et al., 2002).

The amount of plant available water in soils varies according to soil characteristics, such as soil texture, amount of organic matter and gravel content. Soil characteristics also affect the absorption process and have a direct physiological effect on plants. When the texture of the soil is fine, the soil matrix potential is low, because of greater forces retaining water in capillary pores and at the surface of clay minerals. Therefore, the plant water potential must be more negative to allow absorption, even if soil volumetric water content is higher in fine-textured soils compared to sandy soils. Indeed, at the wilting point, the soil volumetric water content of fine-textured soil is always higher than that of coarse-textured soils (Kramer and Boyer, 1995). Water in macro and meso-pores is generally more easily available to plants, but it is also more mobile, as it is not retained by capillary forces. Sandy soils has higher macro and meso-porosity than clayey soils. Its availability is highly variable in time. Contact between roots and soil, which is necessary for absorption, is favoured in fine-textured soils and more difficult in coarse-textured soils, and in soils rich in gravels. These parameters influencing soil water potential and water absorption by vines have an important effect on terroir effect, which is probably indirect and mediated by the physiological adaptations of vines to the surrounding environment (van Leeuwen, 2010). In Bordeaux vineyards, wines produced on clayey soils, where the soil matrix potential is lower, are higher in anthocyanin content than those produced on sandy soils (van Leeuwen et al., 2004). Grapes also ripen faster on clayey soils. In Tuscany, moderately saline soils have been shown to produce the best wines (as evaluated by a sensory panel) even if water is not limited, probably because the lower osmotic potential induces a moderate water deficit, as measured by $\delta^{13}C$ (Costantini et al., 2009, 2010). Soil texture modifies the plant's response to drought, as shown by Tramontini and coworkers in 2012, studying the effect of texture on grapevine physiology in neighbouring soils during the same vintage. They observed that gravel soils limited stomatal conductance and predawn water potential more than clayey and sandy soils. In sandy soils, stomatal conductance was highly variable, while it was less in clayey soil. On gravel soils, stomatal conductance was constantly low, independently from the level of water stress. Some authors have attributed the reported physiological differences observed in various soils to differences in root-shoot signalling mediated by ABA (Lovisololo et al., 2010; Ferrandino and Lovisololo, 2014). The water-holding capacity of a soil varies with soil depth. In deeper soils, vine vigour is higher and phenology is delayed (Bodin and Morlat, 2006). Soil depth can also have a direct effect on plant physiology, independently from the water amount, which is known as the bonsai effect (Passioura, 2002). However, the influence of such physiological modifications in field conditions should be further investigated.

With increasingly dry soil conditions, the root/shoot biomass ratio increases (Dry et al., 2000; Hsiao and Xu, 2000). While root growth continues in the most humid soil layers (Bauerle et al., 2008), generally located at greater depths, shoot growth is quickly inhibited by water deficit (Schultz

and Matthews, 1988; Lebon et al., 2006). The exploitation of soil water tends to be as complete as possible. Indeed, the use of lateral resources plays a very important role during drought periods (Bauerle et al., 2008). Plants can also lose water during the absorption process, at root level. This process is called hydraulic lift, i.e. water redistribution through plant roots from wet to dry soil layers. The amount of water involved can be extremely significant (2-154%), and the movement of water has been documented in every direction, including lateral transfer (Smart et al., 2005). The phenomenon has several physiological and environmental implications. It increases the survival of roots and maintains root-soil contact in the more easily drying part of the soil; it moistens nutrients in the shallower soil layers; it maintains fine roots alive in this part of the soil (Neumann and Cardon, 2012; Prieto et al., 2012).

3 Assessing the soil water availability to plants

The available water capacity of a soil (also called Soil Water Holding Capacity or SWHC) has been defined as the difference between two limits of soil water content. The upper limit is the volumetric soil water content at field capacity (the maximum amount of soil water, excluding free water, that a soil is able to store in the root zone), while the lower limit is the volumetric soil water content at the permanent wilting point (the amount below which water is so strongly retained that plants are unable to absorb it). Field capacity corresponds to a soil potential -0.33 kPa ($pF = 2.45$), while the permanent wilting point have been defined at -15 kPa ($pF = 4.2$) (Richards and Weaver, 1944). The concept of plant available soil water capacity, in the form described here, was first introduced by Veihmeyer and Hendrickson (1950). Its simplicity helped to popularise it for irrigation purposes, but is far from being unanimously accepted in the scientific community. It has been argued that the definition of the two extremes lacks a universal physical basis (Hillel, 1998), and also that water cannot be considered equally available in the expected range because availability decreases as the soil dries out and soil water potential decreases (Richards and Wadleigh, 1952). Furthermore, it is obvious that water availability to plants cannot be assessed without considering the plant. Roots are not uniformly distributed in the soil, water availability is heterogeneous in space and time, and such heterogeneity affects plant physiology at the whole-plant level. Finally it has been observed that plants, including grapevines (Costantini et al., 2009), can absorb water at lower levels than the theoretical wilting point (i.e., -15 kPa). It is worth noting that Veihmeyer and Hendrickson (1950) already reported a similar observation for plants grown in containers. These observations cannot be ruled out and have to be taken into account both for irrigation scheduling and for ecophysiological research. One possible but only partial solution is the concept of Total Transpirable Soil Water, (TTSW). The TTSW seeks to include root distribution in the assessment of soil water availability for plants (because root absorption is the first cause of water content variation in soils), and also to evaluate soil water capacity on the basis of the physiological response of plants. The TTSW is

defined as the difference between soil water at field capacity and soil water measured when plants are no longer able to extract water from the soil, which depends on the plant species. Both limits are directly estimated in the field, and not in the laboratory, by moisture release curves. The idea was first advanced by Ritchie (1981) and then experimented with success both in herbaceous crops (Lacape et al., 1998; Lecoeur and Guilioni, 1998; Guilioni and Lhomme, 2006, to name but a few) and in woody species (Sinclair et al., 2005; Lu et al., 2010, to name but a few). In grapevines the concept has been used in the most recently developed water balance model (Lebon et al., 2003; Pellegrino et al., 2006; Celette et al., 2010). Water balance modeling is an interesting approach to assess vine water status in both irrigated and non irrigated vineyards, especially when coupled to plant-based measurements (van Leeuwen et al., 2010). Soil moisture can be difficult to measure in field conditions because the grapevine is a deep-rooting species, often grown on soils rich in gravels. Hence, measuring soil water potential with tensiometers, or soil water content using Time Domain Reflectometry (TDR), or neutron moisture probes, can be difficult or even impossible to implement. Furthermore, these devices measure only a very small volume of soil, and even when the measurement is replicated by increasing the number of probes, no information is generally obtained about the lateral variation of the TTSW. Only a vertical soil moisture profile can be established. In addition, multiplying the number of such devices can lead to major perturbations of the system and prohibitive costs. The estimation of TTSW with such devices depends greatly on the position of access tubes or probes and can therefore yield misleading information. Geophysical imaging measurements such as electrical resistivity provide visual quantification of soil water content in two or three dimensions, and assess its variations over time. Electrical resistivity is therefore a powerful tool to study soil water relationships at high spatial and temporal resolution.

185 **4 Electrical imaging of the soil water**

Applications of geophysical imaging techniques, and specifically electrically based techniques, have been tested and reviewed in hydrology (Robinson et al., 2008), ecology (Jayawickreme et al., 2014), in plant science (Attia Al Hagrey, 2007), soil sciences and agronomy (Samouelian et al., 2005 which also review the basic principles). They offer promising perspectives in agronomy, for both production and research. The main techniques are based on the direct or indirect measurement of electrical resistivity (or of its opposite, electrical conductivity), such as electrical resistivity tomography (ERT, or or Electrical Resistivity Imaging, ERI) and Electro Magnetic Induction (EMI). Measurements can also be recorded with mobile devices, and several commercial sensors have been developed to assist in soil mapping. The success of electrical resistivity is based on its sensitivity to soil properties, including water (Friedman, 2005; Hadzick et al., 2011; Brillante et al., 2014a). It can be implemented for many purposes, like soil texture mapping (Triantafyllis and Lesch, 2005), assessment of coarse element content in soils, (Tetegan et al., 2012), the study of soil structure and compaction (Besson

et al., 2004), soil hydraulic conductivity, (Doussan and Ruy, 2009), soil horizonation, (Tabbagh et al., 2000), assessing the effect of different tillage systems (Basso et al., 2010), to map root distribution
200 and quantify biomass (Amato et al., 2008, 2009; Rossi et al., 2011), and absorption (Srayeddin and
Doussan, 2009), for agricultural management purposes, especially in precision agriculture (Jaynes
et al., 2005; Lesch et al., 2005; Corwin and Lesch, 2005; Andrenelli et al., 2013; André et al., 2012),
for the evaluation of soil volume wetness and of transpirable soil water both at the plot scale (Michot
et al., 2003; Attia Al Hagrey, 2007; Werban et al., 2008; Garré et al., 2011, 2013; Brillante et al.,
205 2014a, to name but a few), and at the field scale (Besson et al., 2010), with interesting perspectives
for applications in plant ecophysiology.

4.1 Acquiring data

The relationship between ER and SW has been observed in many studies, by many authors and in
many different settings (see section 4.3). It is dependant on soil characteristics and is therefore site
210 specific. Hence, in order to use ER to monitor soil water it is necessary to perform a calibration,
which can be carried out in the field or in the laboratory. The following section will review and com-
pare the procedures used to acquire data to explore the relationship between ER and SW. Modelling
details will be described., but the technical and practical aspects of ERT measurements will not be
discussed (see the tutorial provided by Loke, 2014).

215 4.1.1 Laboratory methods

Data for successful modeling of the ER-SW relationship can be acquired with either laboratory or
field calibration. Laboratory practices ensure tight control over all the environmental parameters,
and therefore make it possible to develop equations for the complete range of moisture conditions
in a given soil in a fast and easy way. Different methods of sample analysis are reported in the
220 literature, from cylindrical undisturbed soil cores (Michot et al., 2003; Michot, 2003) to repacked
samples in boxes (Hadzick et al., 2011). The validity of calibration developed in the laboratory
for field applications is today a matter of debate, especially when the soil structure is disturbed
during sampling. Indeed, soil structure, and especially its porosity greatly affects soil bulk resistivity
(Archie, 1942, and derived models), therefore Friedman (2005) remarked that field application of
225 calibration obtained with repacked samples should be avoided, because of the possibility of large
systematic errors. On the other hand, Nadler (1991), observed that ER-SW relations were stable,
whether measured on "field", "packed" or "severely disturbed samples". Soil structure is not the
only problem. Michot et al. (2003) used both laboratory (measuring the resistivity of cylindrical soil
cores) and field methods (with the 4P method, described hereafter). They had to discard the first
230 method because the saturation water conductivity of the cylindrical soil cores was different from the
conductivity of the soil solution. In addition, they remarked great variability in the resistivity values

obtained for different volumes of soil, for the same soil moisture content: the higher the volume of the soil core, the higher the Electrical Resistivity.

4.1.2 Field methods

235 Field methods permit calibrations specifically adapted to the local context. They are more difficult to implement and the control over the environment is lower than for laboratory methods. In field conditions, it can take a long period of time to obtain a variation in soil water content large enough to fit the model, particularly in deeper soil layers, except for irrigated vineyards located in dry regions. Different methods have been used to examine SW-ER relationships in the field, using electrical resistivity, whether inverted or not. Two methods can be used to measure the bulk ER (i.e. not inverted) of a soil in undisturbed conditions and then to explore ER-SW relationships. The first is the 4P method (principles and an example of application are provided in Michot et al., 2003). This method uses 4 electrodes inserted in the soil, in a trench, perpendicularly to the soil profile. The major part of each electrode is isolated, except the end, to ensure a punctiform contact with the soil (1 – 2 cm, or more in stony soils). Because the soil surrounds the electrodes in all directions, and current propagation is not limited by the air, as is the case when electrodes are at the soil surface, the function that allows the measurement of the potential difference, ΔV , uses 4π instead of 2π . The second technique, which is easier to implement, uses the electrical conductivity given by TDR probes, to fit the relationship between ER and SW (an example is in Beff et al., 2013). If the TDR device is combined with a datalogger, a large amount of data may be acquired, easily, rapidly and economically.

When inverted electrical resistivity is used, the inversion uses a grid with the spatial resolution that best fits the soil water measurements. The cells corresponding to the soil layer where soil water measurements are available are selected, and their ER is laterally averaged. The final data that will be used for the spatialisation and imaging in ERT are used to fit the relationships (an example of the procedure is provided in Brillante et al. (2014a). The drawback of this approach is that the inversion process, whether for the ERT technique or for any other imaging technique, only yields estimated values of ER (there is no single solution). The true value approached by inversion is the bulk ER data of a specific region of soil. The bulk ER data would be the most accurate choice, but it is more complicated to obtain, because the device used for measuring has to be inserted in the specific region of interest, while with inversion the device can generally be at the soil surface. An advantage of the use of inverted ER is that a greater amount of data can be acquired, therefore providing greater spatial coverage, both vertically and laterally. In addition, Brillante et al. (unpublished data) tested both possibilities, and concluded that if the inversion process converges with a low associated error (lower than 5%), the difference between inverted ER and bulk ER is low enough to justify the use of inverted data. The iteration to select and fit the model also has to be defined. One possibility is to use the iteration with the best performances in the relationship with SW, another is to use the iteration with the lowest error (as measured by RMSE, and lower than 5%).

4.2 Temperature correction

Electrical current in soils is mainly electrolytic, i.e. based on the displacement of ions in pore water. The electrical resistivity of soil therefore depends on the amount of water in the pores and on its concentration in electrolytes. The ER decreases with a decrease in soil water content (Samouelian et al., 2005). However, the electrical resistivity is also dependent on other soil characteristics, such as for example the amount of gravels and clay, salinity and temperature. This last because of kinetic effects on ion mobility in pore water. It is important before fitting any relationship between ER and soil water content to adapt the ER to the reference temperature of 25 °C (Samouelian et al., 2005). A linear correction equation is generally used to increase (or reduce) ER by a factor α , if soil temperature is higher (or lower) than the reference temperature (Campbell et al., 1948). The value of the correction factor, is approximately equal to 2% (in the literature, the factor varies from 1.9% in Amente et al. (2000) to 2.5% in Brunet et al. (2010)). It has also been observed that the α factor can vary slightly for a given soil depending on its temperature (Illiceto, 1969). Although some studies have neglected this correction (in particular when temperature variations are low), its use should be considered good practice (Brevik et al., 2004; Nijland et al., 2010).

4.3 Modelling of relationship between ER and SW

The relationships between Electrical Resistivity and Soil Water have been investigated since the 1940s, initially for petroleum research, and then in geological contexts (Archie, 1942). Soil ER is dependant on soil properties other than water, such as gravel content, texture class, salinity, temperature, etc. (as reviewed in Samouelian et al., 2005). Hence, a unique relationship for an entire soil profile is possible only for homogeneous soils. Examples can be found in Bernard-Ubertosi et al. (2009); Brunet et al. (2010); Brillante et al. (2014a). If the soil is heterogeneous, this has to be taken into account in the relationship. One possible solution is to fit specific relationships for each soil layer (see Michot et al., 2003; Beff et al., 2013; Garré et al., 2011, among others). This method is efficient when SW probes are fixed in the soil. The fitting of many individual relationships for a number of thin and regularly spaced soil layers (every 0.1 m for example in Brillante et al., 2014a) can be accurate when soil water is measured by probes inserted in access tubes. The separation of data between the soil surface and the deeper soil layers, also improves the fit, (Hadzick et al., 2011). Another solution is to include soil properties in the model to used to develop pedotransfer functions (Hadzick et al., 2011; Brillante et al., 2014a). Many authors have developed semi-empirical geophysical models to describe the relationships and investigate the main soil factors involved. Other authors have developed purely empirically relationships. In the following sections, different methods used to spatialise SW by ER are reviewed in two groups: petro-physical models and experimental calibrations.

4.3.1 Petro-physical models

The first petro-physical model linking ER to SW was proposed by Archie (Archie, 1942) and showed in equation 1 in term of electrical resistivity:

$$\rho = \frac{a}{\phi^m \theta^n \sigma_w} \quad (1)$$

Where ρ is the electrical resistivity of the fluid saturated rock, ϕ denotes the porosity, σ_w represent the electrical conductivity of the brine, θ is the brine saturation, m is the cementation exponent, n the saturation exponent and a is the tortuosity factor. It was developed in pure sand without any clay and can be useful for coarse-grained soil with limited clay content (examples of applications are given in Attia Al Hagrey, 2007; Brunet et al., 2010). Indeed, clays can have a direct effect on soil resistivity because clay minerals are electrically charged and can directly conduct electric current at their surface. The model developed by Waxman and Smits (1968) was based on the Archie model, with the inclusion of a term accounting for the Cation Exchange Capacity (CEC) of the medium. Like the Archie model, the Waxman and Smith model was also developed for geological applications, but it has been successfully applied in soil contexts (Garré et al., 2011). Other modifications of the Archie law have been proposed by other authors (Revil et al., 1998; Linde et al., 2006; Revil et al., 2007; Shah and Singh, 2005), often with increasing complexity in order to better capture the details of the electrical flow in geological contexts. Many of these petro-physical models were tested, in a laboratory experiment, for application on loamy soils, by Laloy et al. (2011). The Archie law has been largely applied because of its simplicity (Frohlich and Parke, 1989), as also the Waxman and Smits model, the latter especially in its simplified form (as in Garré et al., 2011; Beff et al., 2013). The generalized form of Archie's law (proposed by Shah and Singh (2005), with an interesting application in Schwartz et al. (2008) appears to be a valid alternative when the soil contains clay and the conductivity of the soil matrix cannot be neglected.

The use of such petro-physical models is interesting from a geophysical perspective. They allow comparison with other studies, as the estimated parameters can be reused in similar contexts. They also allow further understanding of the electrical resistivity of soils. However, in some situations, there is no consensus about the meaning of some parameters in the models, which may have been included only with the aim of improving the fit (e. g., as the a coefficients in the modified Archie law by Winsauer et al., 1952). Moreover, and particularly for the most useful models, the factors influencing the ER-SW relationships are loosely compressed into a few global parameters (as in the simplified Waxman and Smith models), meaning that their precise interpretation remains possible, but is more difficult (Garré et al., 2011).

4.3.2 Experimental calibrations

The use of a petro-physical model is not the only way to predict soil water content by ER. It is also possible to use a direct empirical calibration, by regression analysis, and with parallel measurements

of the volumetric soil water content. This can be the most direct approach, if the aim is merely to use ER as an ancillary variable to spatialise SW. This technique has an accuracy that is comparable to the application of a petro-physical model, and it has successfully been used by many authors (among
340 others Michot et al., 2003; Calamita et al., 2012; Brillante et al., 2014a). A linear regression analysis was suggested by Gupta and Hanks (1972). However, the relationship between SW and ER appears linear only when considering a limited range of variations of these variables. When looking at the data collected from different studies by Calamita et al. (2012), it appears obvious that the global relationship is not linear (as in all petro-physical models previously reviewed). Some adjustments
345 are therefore needed in order to account for the lack of linearity (Calamita et al., 2012; Brillante et al., 2014a, reviewed some possibilities of adjustment). Alternatively, non-linear regression techniques have also been used. Extrapolation (i.e. forecasting outside the observed range of data) should be avoided because, in this type of calibration, only the form of relationship relative to the observed data is modelled. Once the relationship has been established, it is applied to transform inverted ER
350 data obtained with ERT method to spatialise the soil water content.

Pedotransfer functions, such the ones typically used in Soil Water Holding Capacity estimation, are currently under development. The aim is to estimate SW, Available Soil Water (ASW), Fraction of Transpirable Soil Water (FTSW) on the basis of ERT and a few selected soil properties (Brillante et al., 2014a) in order to allow a wider use of the technique, without the necessary process of cal-
355 ibration and modelling, which is today the most time-consuming part of the work. Because of the easy application of these experimental functions, it can be worthwhile to compare them to the other methods previously reviewed.

Part II. Applying the electrical resistivity to monitor the Fraction of Transpirable Soil Water, in relation to grapevine water potentials. A Case study.

360 5 Material and methods

5.1 Experimental site

The results presented in this study are derived from data collected over two years (2012-2013) in an experimental plot located in a commercial vineyard (Domaine Louis Latour, Aloxe-Corton, Bur-
gundy), in France. Each plot is a 7 m x 7 m area composed of 49 grapevines (*Vitis vinifera*, L.), cul-
365 tivar Chardonnay B. grafted on the SO4 rootstock (interspecific cross between *Vitis riparia*, Michx. and *Vitis berlandieri*, Planch.). Vines were guyot pruned and trained in a vertically shoot position trellis system with the first training wire at 0.5 m and the fruiting cane trimmed at 1.20 m, distance between plants was 0.9 m, approx. Plant position was taken with a differential GPS (DGPS Trimble Geo XH V6, precision < 5-10 cm). The soil is a Calcaric Cambisol (Aric, Colluvic, Loamic, Pro-
370 tocalcic) according to the World Reference Base for Soil Resources (IUSS Working Group WRB,

2014), located in a foot-slope positions. The colluvium is mainly composed of fine earth eroded from the soils of the upper part of the slope, but also gravel (20% in volume in the first metre of the profile). The parent material was a marl-limestone series dating from the Middle Oxfordian. Figure 1 illustrates the plot location and equipment. Each plots was equipped with three Tecanat™ access tubes for TDR soil water measurements profiles and with 24 stainless steel electrodes for Electrical Resistivity Tomography (ERT) measurements. Meteorological data were collected from an on-site weather station.

5.2 FTSW measurement and spatialisation

In 2012 and 2013, SW was measured weekly from bunch closure to grape maturity (approx. mid-June to mid-September, 28 dates) by TDR (TRIME-T3 Imko-GmbH/Ettlingen-DE, precision $\pm 2\%$). From SW measurements FTSW data were computed as defined in the work by Pellegrino et al. (2005b). The minimum and maximum SW values necessary to compute the FTSW were found with a complete search over all available measurements for each depth. Plants reached a minimum value of approx. -0.4MPa, necessary to approximate the lower bound of FTSW during 2012. On the same days, electrical resistivity measurements were performed using a multichannel resistivity meter (Syscal Junior, Iris Instruments, Orleans France) with 24 stainless steel electrodes to generate high resolution 2D electrical resistivity images along the vine rows, having 0.375 m wide and 0.1 m thick pixels. The total length of the geophysical transect was of 17.25 m. The 7 meters at the center of the transect where there is the higher sensitivity and depth of measurements correspond to the experimental plot. A pedotransfer function specifically developed in this soil and published in Brillante et al. (2014b) was used to obtain 2D images of the FTSW. The random forest model used for the pedotransfer function had an RMSE= 17% error in FTSW.

5.3 Plant physiological measurements

Predawn leaf Ψ_{pd} and solar noon stem Ψ_{stem} water potentials (Choné et al., 2001) were monitored weekly with a pressure chamber (PMS Instruments Inc., Albany, OR, USA). Eight grapevines were measured for Ψ_{pd} and twelve for Ψ_{stem} . Plant water potentials were measured on the same day of soil water and electrical resistivity measurements.

6 Results and discussion

Following the procedure described here above the maps in figure 2 were obtained. They show the variations of the FTSW in a vineyard soil during the last of the two years of measurement (2013). In parallel the evolution of grapevine leaf water potential is provided, measured both at the time of maximum rehydration (red line, pre-dawn leaf water potential), and at the time of maximum transpiration (blue line, solar noon stem water potential). Rainfall and temperatures are also indicated.

Maps of FTSW can at first sight be somewhat misleading, because even if all pixels are on the same
405 scale (being FTSW a normalised variable) the numerical relationship between FTSW and ASW
varies across pixels. It has to be considered that FTSW maps do not show dry and wet soil regions,
but they show differences in soil water depletion. Because of the relative scale the amount of water
needed to bring to 100 the FTSW of two depleted pixels having the same FTSW can be different and
these maps cannot be read in this way. Regions of the soil that are only marginally explored by roots,
410 where all the FTSW correspond to $0.01 - 0.02 \text{ cm}^3 \cdot \text{cm}^{-3}$, (1 – 2 %vol.) of SW, very soon reach
their extreme low and high values. A low FTSW value is not necessarily the sign of greater root
absorption, but is primarily the sign of the depletion of the water reservoir. However such confusion
disappears when looking at the map time-series as a whole.

In figure 2 it appears that the FTSW and grapevine leaf water potentials follow a similar temporal
415 pattern, with alternating phases of depletion and replenishment, even at a weekly scale. The pattern is
also obviously related to the amount of rainfall. Soil water tended to deplete throughout the season,
but heavy rains replenished the reservoir several times during the season, especially at the end of
July and at the end of August. The grapevine water deficit followed the same pattern, even if it never
indicated a severe plant water stress but moderate. It is very interesting to observe that the midday
420 Ψ_{stem} appears to be more sensitive than the Ψ_{pd} to even slight variations in the FTSW, and follows
well the overall pattern of soil moisture. This confirms observations by other authors (van Leeuwen
et al., 2010). Between 0.10 m and 0.20 m in depth, a compacted layer shows a singular temporal
behaviour, compared to the rest of the shallow soil, with low values of FTSW, even in re-wetting
phases. This layer is little explored by the root system and can prevent water infiltration. The spatial
425 variation of FTSW is not limited to a vertical gradient, but also varies laterally, even if the grapevines
are planted very densely in this plot (0.9 m between plants). Traditional systems used for monitoring
soil water (TDR, neutron probes, etc.) can fail to accurately assess the overall amount of the FTSW,
if the choice of their location is not appropriate, and if their position relative to plants is taken into
account.

430 Figure 3 plots the variations of ER between two dates (2013-07-16/2013-07-23 and 2013-08-
15/2013-08-21), characterised by a steeper reduction in the FTSW, compared to other days. These
measurements were carried out at the end of the two longest dry periods, with a parallel drop in leaf
water potentials. Variation maps, if compared to TDR-based FTSW, may have higher errors than
single date maps, because of the cumulation of errors when computing the differences between the
435 FTSW for various dates. The colour palette chosen for presenting these maps takes into account the
error (as measured by RMSE). The white colour is used for pixels that do not vary, and a gradient
red or blue colour is used once the threshold of RMSE is passed. Hence, when red or blue is used,
the difference in FTSW for different dates is significant. When looking at dates July 16 and 23,
and August 15 and 21 in figure 2 it appears that the soil globally dries out but, looking at 2, it
440 becomes obvious that these differences are very localised. In July, when the water deficit is still

low, the regions of greater variations of FTSW are located at the soil surface. In the map from 21st August, where the water deficit is higher (the predawn leaf water potential lower), greater reduction of FTSW is observed between the grapevines, and also in deeper layers of the soil. It is also interesting that FTSW variations are reduced for both maps at the location of a young vine. It appears
445 that regions of great variations in FTSW alternate with regions of lower variation. However, the spatial organisation appears dependent on the level of water deficit experienced by the grapevines. On July 16, the predawn leaf water potential is less negative than on August 21 and, with a lower water deficit, water absorption remains localised at the soil surface. Lateral heterogeneity of FTSW is greater than in August. Indeed, on the August map, the soil regions located immediately beneath the
450 grapevines appear to show the greatest FTSW variations, but also seem to increase the exploitation of water in the area between plants.

Finally, figure 4, summarises the spatio-temporal soil water relationships, by cumulating the absolute values of all variations observed over two years (computed from the 28 dates of measurement) in order to qualitatively detect hotspots in soil for water absorption, in relation to the observed water
455 deficit during the monitoring period.

7 Conclusions

This paper starts from the role of SW in the terroir to review the current knowledge about soil water availability to plants and its measurement. Specifically, it concentrates on the use of ER for this purpose. ER techniques arouse today a great interest among scientists and professionals because
460 they allow to spatially quantify water in soils in a rapid way and with low perturbation. Generic reviews on electrical resistivity can be found in the literature (a good example is Samouelian et al., 2005), but a work centred on the use of ERT to monitor SW was still lacking. This review has tried to be as complete as possible, but evidently some aspects will merit further considerations. As an example, the work do not describe with details ERT-related technical approaches and their
465 suitability to spatialise and measure SW, such as the use of different arrays, long electrodes, or inversion methodologies. Conversely, the work has a point of force in the description of methods and modelling approaches to calibrate ER with TDR measurements. However, some of the reported techniques are still at their beginning, such as the use of pedotransfer functions in SW estimation, and therefore their validity will be assessed by time. At the end of the article, a case study has been
470 presented, with the purpose of showing the technique, and fire up the curiosity of the less expert reader.

In conclusion authors believe that ERT is a technique with a great future in agronomic scenarios both from a research and production point of view. It will allows the answer to new questions on plant and soil relationships, and it will also open the way to new techniques for water management
475 in agricultural scenarios.

Acknowledgements. This work was funded by the Conseil Régional de Bourgogne and the Bureau Interprofessionnel des Vins de Bourgogne (BIVB). The authors wish to thank Domaine Latour for the access to the vineyard; Carmela Chateau Smith for assistance in English, Sarah De Ciantis, Céline Faivre-Primot, Thomas Marchal and Basile Pauthier for help in laboratory analysis and/or field-data acquisition. Authors wish also
480 thank anonymous reviewers for help to improve the quality of the manuscript.

References

- Amato, M., Basso, B., Celano, G., Bitella, G., Morelli, G., and Rossi, R.: In situ detection of tree root distribution and biomass by multi-electrode resistivity imaging, *Tree physiology*, 28, 1441–1448, <http://www.ncbi.nlm.nih.gov/pubmed/18708325>, 2008.
- 485 Amato, M., Bitella, G., Rossi, R., Gómez, J. A., Lovelli, S., and Gomes, J. J. F.: Multi-electrode 3D resistivity imaging of alfalfa root zone, *European Journal of Agronomy*, 31, 213–222, doi:10.1016/j.eja.2009.08.005, <http://linkinghub.elsevier.com/retrieve/pii/S1161030109000732>, 2009.
- Amente, G., Baker, J., and Reece, C.: Estimation of soil solution electrical conductivity from bulk soil electrical conductivity in sandy soils, *Soil Science Society of America Journal*, 64, 1931–1939, 2000.
- 490 André, F., van Leeuwen, C., Saussez, S., Van Durmen, R., Bogaert, P., Moghadas, D., de Ressaéguier, L., Delvaux, B., Vereecken, H., and Lambot, S.: High-resolution imaging of a vineyard in south of France using ground-penetrating radar, electromagnetic induction and electrical resistivity tomography, *Journal of Applied Geophysics*, 78, 113–122, doi:10.1016/j.jappgeo.2011.08.002, <http://linkinghub.elsevier.com/retrieve/pii/S0926985111001728>, 2012.
- 495 Andrenelli, M. C., Magini, S., Pellegrini, S., Perria, R., Vignozzi, N., and Costantini, E. A. C.: The use of the ARP© system to reduce the costs of soil survey for precision viticulture, *Journal of Applied Geophysics*, 99, 24–34, doi:10.1016/j.jappgeo.2013.09.012, <http://linkinghub.elsevier.com/retrieve/pii/S0926985113002115>, 2013.
- Archie, G. E.: The electrical resistivity log as an aid in determining some reservoir characteristics, *Transactions*
500 *of the AIME*, 146, 54–62, 1942.
- Attia Al Hagrey, S.: Geophysical imaging of root-zone, trunk, and moisture heterogeneity, *Journal of Experimental Botany*, 58, 839–854, doi:10.1093/jxb/erl237, <http://www.ncbi.nlm.nih.gov/pubmed/17229759>, 2007.
- Basso, B., Amato, M., Bitella, G., Rossi, R., Kravchenko, A., Sartori, L., Carvahlo, L. M., and Gomes, J.:
505 Two-dimensional spatial and temporal variation of soil physical properties in tillage systems using electrical resistivity tomography, *Agronomy Journal*, 102, 440, doi:10.2134/agronj2009.0298, <https://www.agronomy.org/publications/aj/abstracts/102/2/440>, 2010.
- Bauerle, T. L., Smart, D. R., Bauerle, W. L., Stockert, C., and Eissenstat, D. M.: Root foraging in response to heterogeneous soil moisture in two grapevines that differ in potential growth rate, *New Phytologist*, 179,
510 857–866, doi:10.1111/j.1469-8137.2008.02489.x, <http://www.ncbi.nlm.nih.gov/pubmed/18503506>, 2008.
- Beff, L., Günther, T., Vandoorne, B., Couvreur, V., and Javaux, M.: Three-dimensional monitoring of soil water content in a maize field using Electrical Resistivity Tomography, *Hydrology and Earth System Sciences*, 17, 595–609, doi:10.5194/hess-17-595-2013, <http://www.hydrol-earth-syst-sci.net/17/595/2013/>, 2013.
- Bernard-Ubertosi, M., Dudoignon, P., and Pons, Y.: Characterization of structural profiles in clay-rich marsh
515 soils by cone resistance and resistivity measurements, *Soil Science Society of America Journal*, 73, 46, doi:10.2136/sssaj2007.0347, <https://www.soils.org/publications/sssaj/abstracts/73/1/46>, 2009.
- Besson, a., Cousin, I., Samouëlian, a., Boizard, H., and Richard, G.: Structural heterogeneity of the soil tilled layer as characterized by 2D electrical resistivity surveying, *Soil and Tillage Research*, 79, 239–249, doi:10.1016/j.still.2004.07.012, <http://linkinghub.elsevier.com/retrieve/pii/S0167198704001497>, 2004.

- 520 Besson, A., Cousin, I., Bourennane, H., Nicoullaud, B., Pasquier, C., Richard, G., Dorigny, A., and King, D.: The spatial and temporal organization of soil water at the field scale as described by electrical resistivity measurements, *European Journal of Soil Science*, 61, 120–132, doi:10.1111/j.1365-2389.2009.01211.x, <http://doi.wiley.com/10.1111/j.1365-2389.2009.01211.x>, 2010.
- Bodin, F. and Morlat, R.: Characterization of viticultural terroirs using a simple field model based on soil depth I. Validation of the water supply regime, phenology and vine vigour, in the Anjou vineyard (France), *Plant and Soil*, 281, 37–54, doi:10.1007/s11104-005-3768-0, <http://link.springer.com/10.1007/s11104-005-3768-0>, 2006.
- Brevik, E. C., Fenton, T. E., and Horton, R.: Effect of daily soil temperature fluctuations on soil electrical conductivity as measured with the Geonics EM-38, *Precision Agriculture*, 5, 145–152, 2004.
- 530 Brillante, L., Bois, B., Mathieu, O., Bichet, V., Michot, D., and Lévêque, J.: Monitoring soil volume wetness in heterogeneous soils by electrical resistivity. A field-based pedotransfer function, *Journal of Hydrology*, 516, 55–66, doi:10.1016/j.jhydrol.2014.01.052, <http://linkinghub.elsevier.com/retrieve/pii/S0022169414000742>, 2014a.
- Brillante, L., Bois, B., Mathieu, O., and J, L.: Spatio-temporal analysis of grapevine water status in hillslope vineyards. The example of Corton-Hill, Burgundy., *Conference proceedings of the Xth International Terroir Congress 2014*, pp. 1–4, 2014b.
- 535 Brunet, P., Clément, R., and Bouvier, C.: Monitoring soil water content and deficit using Electrical Resistivity Tomography (ERT) – A case study in the Cevennes area, France, *Journal of Hydrology*, 380, 146–153, doi:10.1016/j.jhydrol.2009.10.032, <http://linkinghub.elsevier.com/retrieve/pii/S002216940900691X>, 2010.
- 540 Calamita, G., Brocca, L., Perrone, A., Piscitelli, S., Lapenna, V., Melone, F., and Moramarco, T.: Electrical resistivity and TDR methods for soil moisture estimation in central Italy test-sites, *Journal of Hydrology*, 454–455, 101–112, doi:10.1016/j.jhydrol.2012.06.001, <http://linkinghub.elsevier.com/retrieve/pii/S0022169412004726>, 2012.
- Campbell, R. B., Bower, C. A., and Richards, L. A.: Change of electrical conductivity with temperature and the relation of osmotic pressure to electrical conductivity and ion concentration for soil extracts, *Soil Science Society of America Proceedings*, 13, 66–69, 1948.
- 545 Celette, F., Ripoche, A., and Gary, C.: WaLIS—A simple model to simulate water partitioning in a crop association: The example of an intercropped vineyard, *Agricultural Water Management*, 97, 1749–1759, doi:10.1016/j.agwat.2010.06.008, <http://linkinghub.elsevier.com/retrieve/pii/S0378377410002052>, 2010.
- 550 Chapman, D. M., Roby, G., Ebeler, S. E., Guinard, J.-X., and Matthews, M. A.: Sensory attributes of Cabernet Sauvignon wines made from vines with different water status, *Australian Journal of Grape and Wine Research*, 11, 339–347, 2005.
- Chone, X., Van Leeuwen, C., Chery, P., and Ribéreau-Gayon, P.: Terroir influence on water status and nitrogen status of non-irrigated cabernet sauvignon (*Vitis vinifera*). Vegetative development, must and wine composition (Example of a Medoc top estate vineyard, Saint Julien Area, Bordeaux , 1997), *South African Journal of Enology and Viticulture*, 22, 8–26, 2001.
- 555 Choné, X., van Leeuwen, C., Dubourdieu, D., and Gaudillère, J. P.: Stem water potential is a sensitive indicator of grapevine water status, *Annals of botany*, 87, 477–483, 2001.

- Corwin, D. L. and Lesch, S. M.: Characterizing soil spatial variability with apparent soil electrical conductivity, *Computers and Electronics in Agriculture*, 46, 135–152, doi:10.1016/j.compag.2004.11.003, <http://linkinghub.elsevier.com/retrieve/pii/S0168169904001280>, 2005.
- Costantini, E. A. C., Pellegrini, S., Bucelli, P., Storchi, P., Vignozzi, N., Barbetti, R., and Campagnolo, S.: Relevance of the Lin's and Host hydrogeological models to predict grape yield and wine quality, *Hydrology and Earth System Sciences*, 13, 1635–1648, doi:10.5194/hess-13-1635-2009, <http://www.hydrol-earth-syst-sci.net/13/1635/2009/>, 2009.
- Costantini, E. A. C., Pellegrini, S., Bucelli, P., Barbetti, R., Campagnolo, S., Storchi, P., Magini, S., and Perria, R.: Mapping suitability for Sangiovese wine by means of $\delta^{13}\text{C}$ and geophysical sensors in soils with moderate salinity, *European Journal of Agronomy*, 33, 208–217, doi:10.1016/j.eja.2010.05.007, <http://linkinghub.elsevier.com/retrieve/pii/S1161030110000602>, 2010.
- des Gachons, C. P., van Leeuwen, C., Tominaga, T., Soyer, J. P., Gaudillère, J. P., and Dubourdieu, D.: Influence of water and nitrogen deficit on fruit ripening and aroma potential of *Vitis vinifera* L cv Sauvignon blanc in field conditions, *Journal of the Science of Food and Agriculture*, 85, 73–85, doi:10.1002/jsfa.1919, <http://doi.wiley.com/10.1002/jsfa.1919>, 2005.
- Doussan, C. and Ruy, S.: Prediction of unsaturated soil hydraulic conductivity with electrical conductivity, *Water Resources Research*, 45, 1–12, doi:10.1029/2008WR007309, <http://doi.wiley.com/10.1029/2008WR007309>, 2009.
- Dry, P., Loveys, B. R., Botting, D., and During, H.: Effects of partial root-zone drying on grapevine vigour, yield, composition of fruit and use of water, in: *Proceedings of the 9th Australian Wine Industry Technical Conference*, pp. 126–131, 1996.
- Dry, P. R., Loveys, B. R., and During, H.: Partial drying of the rootzone of grape. II. Changes in the pattern of root development, *Vitis*, 39, 9–12, 2000.
- Ferrandino, A. and Lovisolo, C.: Abiotic stress effects on grapevine (*Vitis vinifera* L.): Focus on abscisic acid-mediated consequences on secondary metabolism and berry quality, *Environmental and Experimental Botany*, 103, 138–147, doi:10.1016/j.envexpbot.2013.10.012, <http://linkinghub.elsevier.com/retrieve/pii/S0098847213001597>, 2014.
- Friedman, S. P.: Soil properties influencing apparent electrical conductivity: a review, *Computers and Electronics in Agriculture*, 46, 45–70, doi:10.1016/j.compag.2004.11.001, <http://linkinghub.elsevier.com/retrieve/pii/S0168169904001255>, 2005.
- Frohlich, R. K. and Parke, C. D.: The electrical resistivity of the vadose zone - Field Survey, *Groundwater*, 27, 524–530, 1989.
- Garré, S., Javaux, M., Vanderborght, J., Pagès, L., and Vereecken, H.: Three-dimensional electrical resistivity tomography to monitor root zone water dynamics, *Vadose Zone Journal*, 10, 412–424, doi:10.2136/vzj2010.0079, <https://www.soils.org/publications/vzj/abstracts/10/1/412>, 2011.
- Garré, S., Coteur, I., Wonglecharoen, C., Kongkaew, T., Diels, J., and Vanderborght, J.: Noninvasive monitoring of soil water dynamics in mixed cropping systems: a case study in ratchaburi province, Thailand, *Vadose Zone Journal*, 12, 1–12, doi:10.2136/vzj2012.0129, <https://www.soils.org/publications/vzj/abstracts/12/2/vzj2012.0129>, 2013.

- Guilioni, L. and Lhomme, J. P.: Modelling the daily course of capitulum temperature in a sunflower canopy, *Agricultural and Forest Meteorology*, 138, 258–272, doi:10.1016/j.agrformet.2006.05.010, <http://linkinghub.elsevier.com/retrieve/pii/S0168192306001468>, 2006.
- 600 Gupta, S. C. and Hanks, R. J.: Influence of water content on electrical conductivity of the soil, *Soil Science Society of America Proceedings*, 36, 855–857, 1972.
- Hadzick, Z. Z., Guber, A. K., Pachepsky, Y. A., and Hill, R. L.: Pedotransfer functions in soil electrical resistivity estimation, *Geoderma*, 164, 195–202, doi:10.1016/j.geoderma.2011.06.004, <http://linkinghub.elsevier.com/retrieve/pii/S0016706111001625>, 2011.
- 605 Hillel, D.: *Environmental soil physics*, Academic Press, San Diego, CA, 1998.
- Hsiao, T. C. and Xu, L. K.: Sensitivity of growth of roots versus leaves to water stress: biophysical analysis and relation to water transport, *Journal of Experimental Botany*, 51, 1595–616, <http://www.ncbi.nlm.nih.gov/pubmed/11006310>, 2000.
- 610 Illiceto, V.: *Contribution à la prospection géophysique des sites archéologiques*, Ph.D. thesis, Université de Paris, 1969.
- IUSS Working Group WRB: World reference base for soil resources 2014. International soil classification system for naming soils and creating legends for soil maps, FAO, Rome, world soil edn., 2014.
- Jaillon, O., Aury, J.-M., Noel, B., Policriti, A., Clepet, C., Casagrande, A., Choisne, N., Aubourg, S., Vitulo, N., Jubin, C., Vezzi, A., Legeai, F., Huguency, P., Dasilva, C., Horner, D., Mica, E., Jublot, D., Poulain, J., Bruyère, C., Billault, A., Segurens, B., Gouyvenoux, M., Ugarte, E., Cattonaro, F., Anthouard, V., Vico, V., Del Fabbro, C., Alaux, M., Di Gaspero, G., Dumas, V., Felice, N., Paillard, S., Juman, I., Moroldo, M., Scalabrin, S., Canaguier, A., Le Clainche, I., Malacrida, G., Durand, E., Pesole, G., Laucou, V., Chatelet, P., Merdinoglu, D., Delledonne, M., Pezzotti, M., Lecharny, A., Scarpelli, C., Artiguenave, F., Pè, M. E., Valle, G., Morgante, M., Caboche, M., Adam-Blondon, A.-F., Weissenbach, J., Quétier, F., and Wincker, P.: The grapevine genome sequence suggests ancestral hexaploidization in major angiosperm phyla, *Nature*, 449, 463–467, doi:10.1038/nature06148, <http://www.ncbi.nlm.nih.gov/pubmed/17721507>, 2007.
- 620 Jayawickreme, D. H., Jobbágy, E. G., and Jackson, R. B.: Geophysical subsurface imaging for ecological applications, *New Phytologist*, 201, 1170–1175, <http://www.ncbi.nlm.nih.gov/pubmed/24649489>, 2014.
- 625 Jaynes, D. B., Colvin, T. S., and Kaspar, T. C.: Identifying potential soybean management zones from multi-year yield data, *Computers and Electronics in Agriculture*, 46, 309–327, doi:10.1016/j.compag.2004.11.011, <http://linkinghub.elsevier.com/retrieve/pii/S0168169904001358>, 2005.
- Kramer, P. and Boyer, J.: *Water relations of plants and soils*, Academic Press, San Diego, CA, 1995.
- Lacape, M. J., Wery, J., and Annerose, D. J. M.: Relationships between plant and soil water status in five field-grown cotton (*Gossypium hirsutum* L.) cultivars, *Field Crops Research*, 57, 29–43, doi:10.1016/S0378-4290(97)00111-1, 1998.
- 630 Laloy, E., Javaux, M., Vanclooster, M., Roisin, C., and Bielders, C. L.: Electrical resistivity in a loamy soil: identification of the appropriate pedo-electrical model, *Vadose Zone Journal*, 10, 1023–1033, doi:10.2136/vzj2010.0095, <https://www.soils.org/publications/vzj/abstracts/10/3/1023>, 2011.
- 635 Lebon, E., Dumas, V., Pieri, P., and Schultz, H. R.: Modelling the seasonal dynamics of the soil water balance of vineyards, *Functional Plant Biology*, 30, 699–710, doi:10.1071/FP02222, 2003.

- Lebon, E., Pellegrino, A., Louarn, G., and Lecoeur, J.: Branch development controls leaf area dynamics in grapevine (*Vitis vinifera*) growing in drying soil, *Annals of Botany*, 98, 175–185, doi:10.1093/aob/mcl085, <http://www.pubmedcentral.nih.gov/articlerender.fcgi?artid=2803536&tool=pmcentrez&rendertype=abstract>, 2006.
- 640 Lecoeur, J. and Guilioni, L.: Rate of leaf production in response to soil water deficits in field pea, *Field Crops Research*, 57, 319–328, doi:10.1016/S0378-4290(98)00076-8, <http://linkinghub.elsevier.com/retrieve/pii/S0378429098000768>, 1998.
- Lesch, S. M., Corwin, D. L., and Robinson, D. A.: Apparent soil electrical conductivity mapping as an agricultural management tool in arid zone soils, *Computers and Electronics in Agriculture*, 46, 351–378, doi:10.1016/j.compag.2004.11.007, <http://linkinghub.elsevier.com/retrieve/pii/S0168169904001371>, 2005.
- 645 Linde, N., Binley, A., Tryggvason, A., Pedersen, L. B., and Revil, A.: Improved hydrogeophysical characterization using joint inversion of cross-hole electrical resistance and ground-penetrating radar travel-time data, *Water Resources Research*, 42, 1–16, doi:10.1029/2006WR005131, <http://doi.wiley.com/10.1029/2006WR005131>, 2006.
- 650 Loke, M. H.: Tutorial : 2-D and 3-D electrical imaging surveys, February, Geotomo Software, 2014.
- Loveys, B. R., Dry, P. R., Stoll, M., and Mc Carthy, M. G.: Using plant physiology to improve the water use efficiency of horticultural crops, *Acta Horticulturae*, 537, 187–197, 2000.
- Lovisolò, C., Perrone, I., Carra, A., Ferrandino, A., Flexas, J., Medrano, H., and Schubert, A.: Drought-induced changes in development and function of grapevine (*Vitis* spp.) organs and in their hydraulic and non-hydraulic interactions at the whole-plant level : a physiological and molecular update, *Functional Plant Biology*, 37, 98–116, 2010.
- 655 Lu, Y., Equiza, M. A., Deng, X., and Tyree, M. T.: Recovery of *Populus tremuloides* seedlings following severe drought causing total leaf mortality and extreme stem embolism, *Physiologia Plantarum*, 140, 246–257, doi:10.1111/j.1399-3054.2010.01397.x, <http://www.ncbi.nlm.nih.gov/pubmed/20618763>, 2010.
- 660 Michot, D.: Intérêt de la géophysique de subsurface et de la télédétection multispectrale pour la cartographie des sols et le suivi de leur fonctionnement hydrique à l'échelle intraparcellaire, Ph.D. thesis, Université Paris 6, 2003.
- Michot, D., Benderitter, Y., Dorigny, A., Nicoullaud, B., King, D., and Tabbagh, A.: Spatial and temporal monitoring of soil water content with an irrigated corn crop cover using surface electrical resistivity tomography, *Water Resources Research*, 39, 14–1–14–20, doi:10.1029/2002WR001581, <http://doi.wiley.com/10.1029/2002WR001581>, 2003.
- 665 Nadler, A.: Effect of soil structure on bulk soil electrical conductivity (ECa) using the TDR and 4P techniques, *Soil Science*, 152, 199–203, 1991.
- 670 Neumann, R. B. and Cardon, Z. G.: The magnitude of hydraulic redistribution by plant roots: a review and synthesis of empirical and modeling studies, *New Phytologist*, 194, 337–352, doi:10.1111/j.1469-8137.2012.04088.x, <http://www.ncbi.nlm.nih.gov/pubmed/22417121>, 2012.
- Nijland, W., van der Meijde, M., Addink, E. A., and de Jong, S. M.: Detection of soil moisture and vegetation water abstraction in a Mediterranean natural area using electrical resistivity tomography, *Catena*, 81, 209–216, doi:10.1016/j.catena.2010.03.005, <http://linkinghub.elsevier.com/retrieve/pii/S0341816210000408>, 2010.
- 675

- Ollat, N., Diakou-Verdin, P., Carde, J. P., Barrieu, F., and Gaudillère, J. P.: Grape berry development: a review, *Journal International des Sciences de la Vigne et du Vin*, 36, 109–131, 2002.
- Passioura, J. B.: Soil conditions and plant growth, *Plant, Cell & Environment*, 25, 311–318, <http://www.ncbi.nlm.nih.gov/pubmed/11841672>, 2002.
- 680 Pellegrino, A., Lebon, E., Simonneau, T., and J, W.: Towards a simple indicator of water stress in grapevine (*Vitis vinifera* L.) based on the differential sensitivities of vegetative growth components., *Australian Journal of Grape and Wine Research*, 11, 306–315, doi:10.1111/j.1755-0238.2005.tb00030.x, 2005a.
- Pellegrino, A., Lebon, E., Voltz, M., and Wery, J.: Relationships between plant and soil water status in vine
685 (*Vitis vinifera*, L.), *Plant and Soil*, 266, 129–142, 2005b.
- Pellegrino, A., Gozé, E., Lebon, E., and Wery, J.: A model-based diagnosis tool to evaluate the water stress experienced by grapevine in field sites, *European Journal of Agronomy*, 25, 49–59, doi:<http://dx.doi.org/10.1016/j.eja.2006.03.003>, <http://www.sciencedirect.com/science/article/pii/S1161030106000517>, 2006.
- 690 Prieto, I., Armas, C., and Pugnnaire, F. I.: Water release through plant roots: new insights into its consequences at the plant and ecosystem level, *New Phytologist*, 193, 830–841, doi:10.1111/j.1469-8137.2011.04039.x, <http://www.ncbi.nlm.nih.gov/pubmed/22250761>, 2012.
- Revil, A., Cathles, L. M., Losh, S., and Nunn, J. A.: Electrical conductivity in shaly sands with geophysical applications, *Journal of Geophysical Research*, 103, 23 925, doi:10.1029/98JB02125, <http://doi.wiley.com/10.1029/98JB02125>, 1998.
- 695 Revil, A., Linde, N., Cerepi, A., Jougnot, D., Matthai, S., and Finsterle, S.: Electrokinetic coupling in unsaturated porous media, *Journal of Colloid and Interface Science*, 313, 315–327, doi:10.1016/j.jcis.2007.03.037, 2007.
- Richards, L. A. and Wadleigh, C. H.: Soil water and plant growth, in: *Soil physical conditions and plant growth*. Volume 2, edited by Byron, T. S., p. 491, Academic Press, 1952.
- 700 Richards, L. A. and Weaver, L. R.: Moisture retention by some irrigated soils as related to soil-moisture tension., *Journal of Agricultural Research*, 69, 215–235, 1944.
- Ritchie, J. T.: Water dynamics in the soil-plant-atmosphere system, *Plant and Soil*, 58, 81–96, doi:10.1007/BF02180050, 1981.
- 705 Robinson, D. A., Campbell, C. S., Hopmans, J. W., Hornbuckle, B. K., Jones, S. B., Knight, R., Ogden, F., Selker, J., and Wendroth, O.: Soil moisture measurement for ecological and hydrological watershed - scale observatories: a review, *Vadose Zone Journal*, 7, 358–389, doi:10.2136/vzj2007.0143, <https://www.soils.org/publications/vzj/abstracts/7/1/358>, 2008.
- Rossi, R., Amato, M., Bitella, G., Bochicchio, R., Ferreira Gomes, J. J., Lovelli, S., Martorella, E., and
710 Favale, P.: Electrical resistivity tomography as a non-destructive method for mapping root biomass in an orchard, *European Journal of Soil Science*, 62, 206–215, doi:10.1111/j.1365-2389.2010.01329.x, <http://doi.wiley.com/10.1111/j.1365-2389.2010.01329.x>, 2011.
- Sadras, V. O. and Schultz, H. R.: Grapevine, in: *Crop yield response to water*, edited by Steduto, P., Hsiao, T., Fereres, E., and Raes, D., p. 501, FAO, 2012.

- 715 Samouelian, A., Cousin, I., Tabbagh, A., Bruand, A., and Richard, G.: Electrical resistivity survey in soil science: a review, *Soil and Tillage Research*, 83, 173–193, doi:10.1016/j.still.2004.10.004, <http://linkinghub.elsevier.com/retrieve/pii/S0167198704002326>, 2005.
- Schultz, H. R. and Matthews, M. A.: Resistance to Water Transport in Shoots of *Vitis vinifera* L., *Plant Physiology*, 88, 718–724, doi:10.1104/pp.88.3.718, 1988.
- 720 Schultz, H. R. and Stoll, M.: Some critical issues in environmental physiology of grapevines : future challenges and current limitations, *Australian Journal of Grape and Wine Research*, 16, 4–24, doi:10.1111/j.1755-0238.2009.0074.x, 2010.
- Schwartz, B. F., Schreiber, M. E., and Yan, T.: Quantifying field-scale soil moisture using electrical resistivity imaging, *Journal of Hydrology*, 362, 234–246, doi:10.1016/j.jhydrol.2008.08.027, <http://linkinghub.elsevier.com/retrieve/pii/S0022169408004551>, 2008.
- 725 Seguin, G.: Alimentation en eau de la vigne dans des sols du Haut-Médoc, *Connaissance Vigne Vin*, 2, 23–34, 1969.
- Seguin, G.: Alimentation en eau de la vigne et composition chimique des mouts dans les grand crus du Médoc. Phénomènes de regulation, *Connaissance Vigne Vin*, 9, 23–34, 1975.
- 730 Shah, P. H. and Singh, D. N.: Generalized Archie’s law for estimation of soil electrical conductivity, *Journal of ASTM International*, 2, 1–20, 2005.
- Sinclair, T. R., Holbrook, N. M., and Zwieniecki, M. A.: Daily transpiration rates of woody species on drying soil, *Tree physiology*, 25, 1469–1472, <http://www.ncbi.nlm.nih.gov/pubmed/16105814>, 2005.
- Smart, D. R., Carlisle, E., Goebel, M., and Núñez, B. A.: Transverse hydraulic redistribution by a grapevine, *Plant, Cell & Environment*, 28, 157–166, doi:10.1111/j.1365-3040.2004.01254.x, 2005.
- 735 Srayeddin, I. and Doussan, C.: Estimation of the spatial variability of root water uptake of maize and sorghum at the field scale by electrical resistivity tomography, *Plant and Soil*, 319, 185–207, doi:10.1007/s11104-008-9860-5, <http://www.springerlink.com/index/10.1007/s11104-008-9860-5>, 2009.
- Stoll, M., Loveys, B., and Dry, P.: Hormonal changes induced by partial rootzone drying of irrigated grapevine, *Journal of Experimental Botany*, 51, 1627–1634, <http://www.ncbi.nlm.nih.gov/pubmed/11006312>, 2000.
- 740 Storchi, P., Constantini, E. A. C., and Buceli, P.: The influence of climate and soil on viticultural and enological parameters of Sangiovese grapevines under non-irrigated conditions, *Acta Horticulturae*, 689, 333–340, 2005.
- Tabbagh, A., Dabas, M., Hesse, A., and Panissod, C.: Soil resistivity: a non-invasive tool to map soil structure horization, *Geoderma*, 97, 393–404, <http://www.sciencedirect.com/science/article/pii/S0016706100000471>, 2000.
- 745 Tetegan, M., Pasquier, C., Besson, A., Nicoullaud, B., Bouthier, A., Bourennane, H., Desbourdes, C., King, D., and Cousin, I.: Field-scale estimation of the volume percentage of rock fragments in stony soils by electrical resistivity, *Catena*, 92, 67–74, doi:10.1016/j.catena.2011.09.005, <http://linkinghub.elsevier.com/retrieve/pii/S0341816211001743>, 2012.
- 750 Tomasi, D., Gaiotti, F., and Jones, G. V.: *The power of the terroir: the case study of Prosecco wine*, Springer Basel, 2013.
- Tramontini, S., Leeuwen, C., Domec, J.-C., Destrac-Irvine, A., Basteau, C., Vitali, M., Mosbach-Schulz, O., and Lovisolo, C.: Impact of soil texture and water availability on the hydraulic control of plant and grape-

- 755 berry development, *Plant and Soil*, 368, 215–230, doi:10.1007/s11104-012-1507-x, <http://link.springer.com/10.1007/s11104-012-1507-x>, 2012.
- Triantafylis, J. and Lesch, S. M.: Mapping clay content variation using electromagnetic induction techniques, *Computers and Electronics in Agriculture*, 46, 203–237, doi:10.1016/j.compag.2004.11.006, <http://linkinghub.elsevier.com/retrieve/pii/S0168169904001310>, 2005.
- 760 van Leeuwen, C.: Terroir : the effect of the physical environment on vine growth , grape ripening and wine sensory attributes, in: *Managing Wine Quality. Volume 1: Viticulture and wine quality*, edited by Reynolds, A., chap. 9, p. 624, Woodhead Publishing, Cambridge, UK, 1 edn., <http://www.sciencedirect.com/science/book/9781845694845>, 2010.
- van Leeuwen, C. and Seguin, G.: The concept of terroir in viticulture, *Journal of Wine Research*, 17, 1–
765 10, doi:10.1080/09571260600633135, <http://www.tandfonline.com/doi/abs/10.1080/09571260600633135>, 2006.
- van Leeuwen, C., Friant, P., Choné, X., Tregoat, O., Koundouras, S., and Dubourdieu, D.: Influence of climate, soil, and cultivar on terroir, *American Journal of Enology and Viticulture*, 55, 207–217, 2004.
- van Leeuwen, C., Tregoat, O., and Choné, X.: Vine water status is a key factor in grape ripening and vintage
770 quality for red bordeaux wine. How can it be assessed for vineyard management purposes?, *Journal International des Sciences de la Vigne et du Vin*, 43, 121–134, 2009.
- van Leeuwen, C., Pieri, P., and Vivin, P.: Comparison of three operational tools for the assessment of vine water status: stem water potential, carbon isotope discrimination measured on grape sugar and water balance, in: *Methodologies and Results in Grapevine Research*, edited by Delrot, S., Medrano, H., Or, E., Bavaresco, L., and Grando, S., chap. 7, pp. 87–106, Springer Netherlands, 1 edn., doi:10.1007/978-90-481-9283-0,
775 <http://link.springer.com/10.1007/978-90-481-9283-0>, 2010.
- Veihmeyer, F. J. and Hendrickson, A. H.: Soil moisture in relation to plant growth, *Annual Review of Plant Physiology*, 1, 285–305, 1950.
- Waxman, M. H. and Smits, L. J. M.: Electrical conductivities in oil-bearing shaly sands, *Society of
780 Petroleum Engineers Journal*, 8, 107–122, doi:10.2118/1863-A, <http://www.onepetro.org/mslib/servlet/onepetropreview?id=SPE-001863-A&soc=SPE>, 1968.
- Werban, U., Attia al Hagrey, S., and Rabbel, W.: Monitoring of root-zone water content in the laboratory by 2D geoelectrical tomography, *Journal of Plant Nutrition and Soil Science*, 171, 927–935, doi:10.1002/jpln.200700145, <http://doi.wiley.com/10.1002/jpln.200700145>, 2008.
- 785 Winsauer, W. O., Shearin, H. M., Masson, P. H., and Williams, M.: Resistivity of brine-saturated sands in relation to pore geometry, *AAPG Bulletin*, 36, 253–277, 1952.
- Zsófi, Z., Gál, L., Szilágyi, Z., Szűcs, E., Marschall, M., Nagy, Z., and Bálo, B.: Use of stomatal conductance and pre-dawn water potential to classify terroir for the grape variety Kékfrankos, *Australian Journal of Grape and Wine Research*, 15, 36–47, doi:10.1111/j.1755-0238.2008.00036.x, <http://doi.wiley.com/10.1111/j.1755-0238.2008.00036.x>,
790 j.1755-0238.2008.00036.x, 2009.

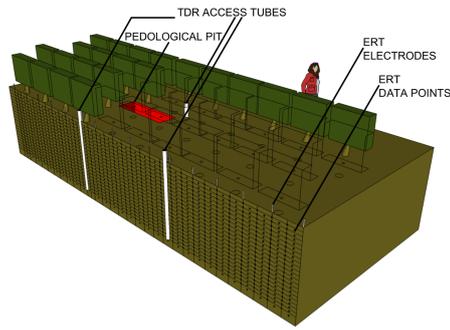


Figure 1. Scheme in 3D which illustrates the equipment of the experimental plot in the vineyard with devices for hydric and geophysical field-data acquisition. This image already appeared in *Brillante et al. 2014*, courtesy of Elsevier.

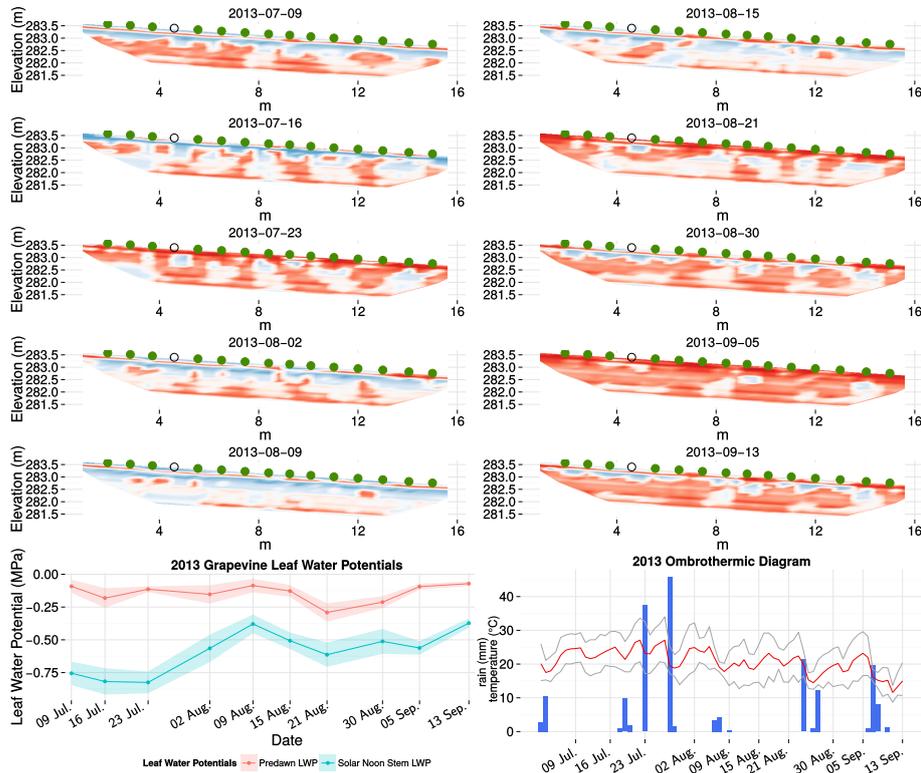


Figure 2. Weekly estimation of the Fraction of Transpirable Soil Water, FTSW, in a vineyard soil spatialised in 2D by electrical resistivity tomography. Dots represent grapevines, they are green filled for fully developed plants, void for very young plants (1 years). In the bottom left panel the grapevine water stress variation as measured by leaf water potentials; in bottom right the ombrothermic diagram of 2013 vintages, temperatures and precipitations. For interpretation of the reference to colour in those figures, readers are kindly referred to the web version of the paper.

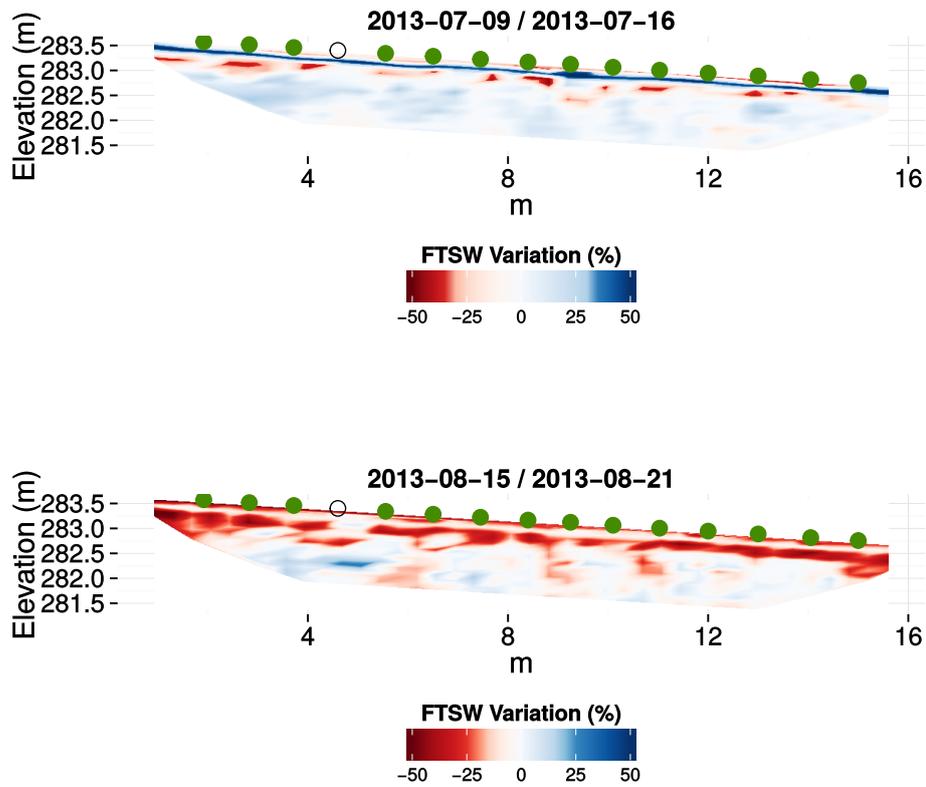


Figure 3. Variations of the Fraction of Transpirable Soil Water, FTSW, between two dates. White colour is mapped to the error associated to the computation of the difference, further explanation in the text. Dots represent grapevines, they are green filled for fully developed plants, void for very young plants (1 years). For interpretation of the reference to colour in those figures, readers are kindly referred to the web version of the paper.

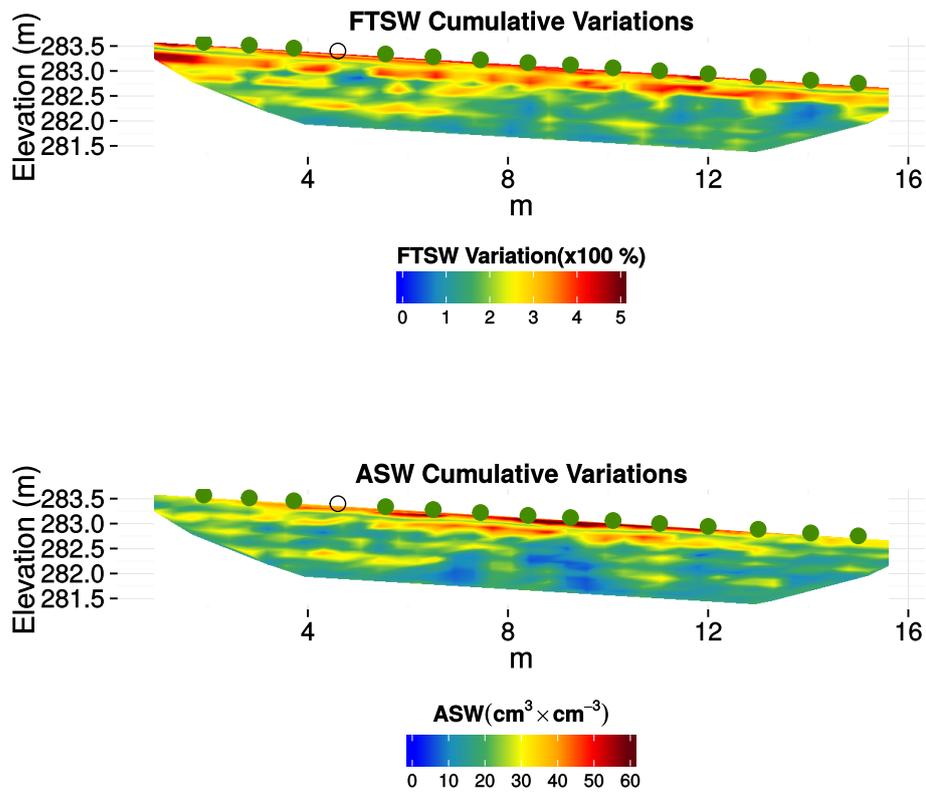


Figure 4. Cumulative variations of the Fraction of Transpirable Soil Water, FTSW, and of the Available Soil Water (ASW) in a vineyard soil. They were obtained by summing the absolute values of the variations between two successive measurements for these variables (28 measurements). Dots represent grapevines, they are green filled for fully developed plants, void for very young plants (1 years). For interpretation of the reference to colour in those figures, readers are kindly referred to the web version of the paper.