

POTENTIAL EFFECTS OF VINASSE AS A SOIL AMENDMENT TO CONTROL RUNOFF AND SOIL LOSS

Z. Hazbavi¹ and S. H. R. Sadeghi²

[1]{Ph.D. Student, Department of Watershed Management Engineering, Faculty of Natural Resources, Tarbiat Modares University, Iran, Tel +98 11 4455 3102, Fax: +98 11 4455 3909, z.hazbavi@modares.ac.ir}

[2]{Professor (Corresponding Author), Department of Watershed Management Engineering, Faculty of Natural Resources, Tarbiat Modares University, Iran, Tel +98 11 4455 3102, Fax: +98 11 4455 3909}

Correspondence to: S. H. R. Sadeghi (sadeghi@modares.ac.ir)

Abstract

Application of organic materials are well known as environmental practices in soil restoration, preserving soil organic matter and recovering degraded soils of arid and semiarid lands. So, the present research focused on evaluating the effectiveness of vinasse, a byproduct mainly of the sugar-ethanol industry, on soil conservation under simulated rainfall. Vinasse can be recycled as a soil amendment due to its organic matter. Accordingly, the laboratory experiments were conducted by using 0.25 m²-experimental plots at 20% slope and rainfall intensity of 72 mm h⁻¹ with 0.5 h duration. **The effect of vinasse was investigated on runoff and soil loss control. Experiments were then set up as a control and three treated plots with doses of 0.5, 1, and 1.5 l m⁻² of vinasse subjected to simulated rainfall.** Laboratory results indicated that vinasse at different levels could nonsignificantly ($P>0.05$) decrease the runoff amount and soil loss rate in the study plots compared to untreated plots except 1.5 l m⁻² which nonsignificantly increased the runoff volume. Also, the results indicated that the soil loss amount at the vinasse application rate of 1 l m⁻² was the least. The average amounts of minimum runoff volume and soil loss were about 3985 ml and 46 g for the study plot at 1 l m⁻² level of vinasse application.

1 **1 Introduction**

2 Soil erosion is an environmental concern resulting in increased sedimentation, turbidity
3 and levels of pollutants in adjacent water bodies (Ebisemiju, 1990; Pieri et al. 2007; Girmay
4 et al., 2009; Bhattarai et al., 2011, Bakr et al., 2012). According to the Forest, Rangeland and
5 Watershed Management Organization of Iran, about 150 M US dollars are annually spent on
6 the watershed management projects implemented to prevent or to alleviate part of soil erosion
7 related problems in the country (Sadeghi et al., 2011). It led to erosion control technologies
8 receiving a great deal of attention to reduce soil erosion. Accordingly, soil erosion control has
9 principal importance in soil management and conservation in developing countries like Iran
10 (Newson, 2002; Haghjou et al., 2014). Besides that, soil management is important to crop
11 productivity, environmental sustainability and consequently human welfare.

12 Covering the bare soil with an appropriate material is one of the soil management
13 practices, which increases water infiltration and surface storage by enhancing the soil
14 structure and porosity. The layer of residues protects the soil against erosion, inhibits weed
15 germination, improves water retention, ameliorates physical and biological soil properties,
16 and is a source of plant nutrients (Sheoran et al., 2010; Araujo-Junior et al., 2013; Prado et al.,
17 2013). In addition, industrial processing of sugar cane to produce sugar and alcohol also
18 generates residues, such as filter cake and vinasse, which have a great potential for use in
19 agriculture as soil improvers and fertilizers (Prado et al., 2013). Meanwhile, to prevent soil
20 loss many organic soil improvers are mainly used (Tejada et al., 2009; Rigane and Medhioub,
21 2011). Additionally, according to Tejada et al. (2006a, 2006b), the general increasing of
22 biomass C in a soil can be associated to the constructive impact of organic materials on the
23 soil physical properties. The application of animal, industrial and municipal wastes is also
24 prevalent throughout the world as they can be an excellent source for nutrient and organic
25 matter (Bhattarai et al., 2011). Several studies have evaluated the effects of composted
26 organic wastes such as animal manure and sewage sludge compost on soil properties, quality
27 and productivity, dissolved organic carbon and nitrate leaching (e.g., Adler and Sikora, 2005;
28 Margesin et al., 2006; Bastida et al., 2007; Karami et al., 2012; Zornoza et al., 2013;
29 Eykelbosh et al., 2015), but there are relatively few studies (e.g., Tejada and Gonzalez,
30 2006b; Tejada et al., 2007; Tejada and Gonzalez, 2008; Gholami et al., 2013; Cerdà et al.,
31 2014a,b; Sadeghi et al., 2015a,b) on evaluating of the effect of organic waste and residues on
32 runoff and soil loss control.

1 Application of organic amendment and mulches has already been proved as a method of
2 improving soil physical properties leading to affect runoff and soil erosion (Albaladejo et al.,
3 2000; Cerdà and Doerr, 2008; Cerdà et al., 2014a,b). Moreover, organic amendments are
4 increasingly being examined for their potential use in preventing soil losses (Tejada and
5 Gonzalez, 2008). There are a variety of organic amendments for soil management and
6 conservation, with different performance and mechanisms. In spite of that, different organic
7 amendments, viz. cotton gin crushed compost and poultry manure, beet vinasse, sewage
8 sludge, organic urban solid refuse, sheep manure, cow manure, rice husk, finely chopped
9 reeds, wheat straw, licorice (root) dregs (Agassi et al., 1998; Albaladej et al., 2000; Ojeda et
10 al., 2003; Tejada and Gonzalez, 2006b; Tejada et al., 2007; Tejada and Gonzalez, 2008;
11 Nicolás et al., 2012; Karami et al., 2012) have been used for soil conservation in agricultural
12 and forestry soils, commonly.

13 Recently, with the advances in industrial sector, significant amount of wastes and residual
14 can be produced which create another source of load on the environment. Also, the high cost
15 of fertilizers and concerns about environmental protection have been great incentives to study
16 the recycling of the large quantities of organic residues produced as byproducts of the sugar
17 and alcohol agro-industries in agriculture (Prado et al., 2013). For instance, the production of
18 one liter of ethanol generate on average between 10-15 liters of vinasse. Vinasse is classified
19 as a class II residue, not inert but not dangerous. Vinasse, like other organic fertilizers has
20 high organic matter, N and K contents (Madejón et al., 2001), which promotes nutrient
21 recycling in ecosystems, and causes less environmental impacts during production. Sugarcane
22 industries generate large quantities of waste generally known as vinasses, stillages or
23 molasses spent wash during the process of ethanol production (Espanã-Gamboa et al., 2011).
24 Vinasse is an important byproduct of ethanol and sugarcane industries, intensively applied to
25 soils in Brazil as liquid fertilizer (Ribeiro et al., 2013). However, the direct application of
26 vinasse is constrained by its high salinity and high density of organic matter and other
27 chemical materials. These issues can be mitigated through mixing the vinasse with other solid
28 wastes. The environmental damage caused by discarding vinasse into the soil or running
29 waters was an incentive to studies aiming to find alternative, economic applications for this
30 residue. Results from such studies indicate that vinasse contributes to improvements in soil
31 quality and agricultural productivity, if it would be properly used (Prado et al., 2013).

32 Though, many studies have been performed to identify the effects of vinasse application on
33 growth, development and production of sugarcane and physical properties of soil (e.g., Tejada

1 et al., 2009; Jiang et al., 2010; Prado et al., 2013; Ribeiro et al., 2013), but very limited
2 studies were taken place to study the effects of application of vinasse on surface runoff and
3 water soil loss rate. According to previous studies (Tejada and Gonzalez, 2006a, 2007; Tejada
4 et al., 2006a, 2007), the application of beet vinasse had unfavorable impacts on some soil
5 properties viz. structural stability, bulk density, ESP, microbial biomass, respiration,
6 enzymatic activities. Madejón et al. (2001) investigated the effect of three vinasse composts
7 on some chemical properties of a calcareous loamy sand soil. Tejada and Gonzalez (2006b)
8 also investigated the relations between soil erosion and erodibility (K) in a treated soil by beet
9 vinasse (BV) applied for 5 years on a Typic Xerofluvent. They demonstrated that when BV
10 was applied, the soil physical and biological properties were declined. The results revealed
11 that in the BV-treated soils under a rainfall with 45 min duration and 60 mm h⁻¹ intensity, the
12 K factor decreased by 6.4% at the end of the experiment compared to control soil. Their
13 results indicated that the use of compost contributed to enhancing the level of organic matter
14 in agricultural soils in SW Andalusia, Spain, which was particularly poor in organic matter.
15 Characterization of vinasses from different feedstock sources by Espanã-Gamboa et al. (2011)
16 showed the most appropriate treatments for the vinasses soluble solids conditioning. They
17 verified that the vinasses could be safely used in agriculture without contaminating soil,
18 underground water or crops, for energy recovery and animal feeding.

19 A review of the literature demonstrated the effectiveness of different organic amendments
20 on growth, development and production of sugarcane and physical properties of soil as well.
21 However, there was no comprehensive study on evaluation of the effect of vinasse
22 amendment on runoff and soil loss control. In recent years, soil erosion has been extensively
23 studied in laboratory using rainfall simulators. So that, the soil erosion plots and rainfall
24 simulators are two important research equipments employed in erosion studies, worldwide.
25 They allow producing runoff and occurring soil loss under repeatable and controlled
26 conditions. In addition, the review of literatures has confirmed that the employ of different
27 sized plots is practically applicable, logically economic and easily controllable and repeatable
28 due to which their further utilizations have been advised with particular considerations
29 (Sadeghi et al., 2012). On the other hand, there is several sugarcane agro-industry
30 development companies in southwestern of Iran producing huge quantity of vinasse mainly
31 discharges into adjacent rivers. Nowadays, assessment the effect of application of waste
32 amendments is new issue of soil conservation studies. Nonetheless, researches on vinasse are
33 in infancy stage and as such substantially more data are required before robust predictions can

be made regarding the effects of vinasse application to soils, across a range of soil, climatic and land management factors. The present study therefore examines the potential role of vinasse amendment on runoff and soil loss reduction on a silt loam soil collected from a summer rangeland, northeastern Iran using a simulated rainfall intensity of 72 mm h⁻¹ and slope of 20%.

2 MATERIALS AND METHODS

2.1 Soil properties

The soil required for the study was provided from upper 30 cm of the soil surface layer from Badranlou area in Northern Khorasan Province, Iran, and transported to the laboratory. The area is mainly under dry land farming system and very prone to soil erosion.

The soil samples were air-dried, crushed, passed through a 2 mm-sieve and analyzed for various physicochemical properties. Soil texture was determined using the hydrometer method according to Bouyoucos (1962). Soil organic matter (SOM) obtained by multiplying total soil organic carbon by 1.724. Total soil organic carbon was measured by the Walkley and Black wet dichromate oxidation method (Nelson and Somers, 1982). Soil potential hydrogen (pH) and electrical conductivity (EC) were determined in 1:2 soil:water suspension by pH and EC meters (Hati et al., 2007). Bulk density at air dried moisture content was measured by Plaster (1985) method (clod method). Properties of the study surface soil (0-30 cm) are shown in Table 1.

2.2 Plot preparation

Experimental plots with 0.5 m long, 0.5 m wide, and 0.3 m deep were used for the present study. The soil was then prepared for application and simulated in the plots using previously reported methods (Thompson and Beckmann, 1959; Loch and Donnollan, 1988; Kukal and Sarkar, 2011). The upper 10 cm of the soil was compacted by concrete roller to achieve the desired bulk density of 1.3 g cm⁻³ and similar to the field conditions. To establish the filter layer under the experimental soils, three layers of mineral pumice grains with different sizes with total thickness of 17 cm were packed. Based on the annual average soil moisture content reported for the soil in the study area, the soil was also treated to produce a moisture content of 35% (Behzadfar et al., 2012; Hazbavi et al., 2013). After soil compaction, the plots were established in water ponds for 12 h. Hence, 12 h after exiting the plots from water ponds, the

vinasse was spread over the soil surface (Hazbavi et al., 2013; Sadeghi et al., 2015 and 2016). Each new experiment was also conducted using new soil and consequently was sprayed by vinasse.

2.3 Vinasse characteristics

Vinasse used for the experiment was produced by Research and Training Institute for the Industrial Development of Sugarcane in Khuzestan Province, Iran. pH and EC of vinasse were determined by pH and EC meters. Organic matter determined by dry combustion method (MAPA, 1986). Calcium (ca), Potassium (K) and magnesium (mg) were determined by an atomic absorption spectrometer after nitric and perchloric acid digestion. Chemical Oxygen Demand (COD) was also determined by closed reflux, colorimetric method (APHA, 1998). The general properties of vinasse have been summarized in Table 2.

The levels of vinasse application (0.5, 1 and 1.5 l m⁻²) were selected based on information existed for application of vinasse for other purposes and other amendments, avoiding considerable environmental pollution due to high contents of N and K probably leading to high salinity and high density, feasibility of application and accessibility as well (Madejón et al., 2001; Tejada and Gonzalez, 2005, 2006a, 2006b; Tejada et al., 2007, 2009; Jiang et al. 2010; Maldonado et al., 2011). Three levels of 0.5, 1 and 1.5 l m⁻² of vinasse were sprayed on soil surface in three replications by a small manual pump and left for 24 h to increase the stability of vinasse layer on the soil surface and mimic the natural conditions. To conduct the comprehensive comparison, one control treatment (without vinasse) at three replications was also applied. Urban tap water was used for the control treatment and the experimental setup was used similar to that for vinasse treatments (Sadeghi et al., 2016).

2.4 Laboratory experiments

To evaluate the effectiveness of vinasse for runoff and soil loss control, laboratory experiments were conducted under a rainfall simulator at the Rainfall and Soil Erosion Simulation Laboratory of Faculty of Natural Resources of Tarbiat Modares University, located in Noor Campus, Mazandaran Province, Iran. The rainfall simulator consists of a 4000

1 L water tank and 27 precalibrated nozzles in three parallel lines designed to simulate
2 raindrops of 1.3 mm average size. The drops fall from a height between 4 and 6 m at the
3 upper and lower parts of the plot, respectively, reaching a 7 ms^{-1} speed the study plot
4 (Gholami et al., 2013; Sadeghi et al., 2015a,b). The laboratory experiments were conducted at
5 20% slopes under simulated rainfall intensity of 72 mm h^{-1} with duration of 30 min almost
6 corresponded with natural rainstorms of the study area. The rainfall intensity of 72 mm h^{-1}
7 with duration of 30 min were considered corresponded with climatological condition in the
8 origin of the soil obtained through intensity–duration–frequency (IDF) curves analysis for
9 data collected from the nearest synoptic station (Bojnourd, Northern Khorasan Province in
10 Northeast of Iran) with the return period of 50 years. The slope of 20% was selected based on
11 the average slope of the original area where the soil was collected (Hazbavi, 2013; Hazbavi et
12 al., 2013; Sadeghi et al., 2014). A general view of the experimental setup is shown in Fig. 1.

13 For each event, the time to runoff initiation was recorded as the elapsed time between the start
14 of rainfall and the time at which surface runoff began entering the runoff collection container
15 located at the end of the plot. Runoff was sampled at different time steps of 2 to 5 min and its
16 volume was accordingly measured. The collection gutter at the lower end of each box was
17 protected by a shield to prevent rainfall from directly entering the collection container. The
18 amount of soil loss was then measured using a decantation procedure; oven-drying at 105°C
19 for 24 h and weighing by means of high precision scale (Gholami et al., 2013; Sadeghi et al.,
20 2016). Also, the runoff commencement and cessation times were also recorded. The time of
21 runoff commencement and cessation times, and regular measurement of runoff volume were
22 measured by a chronometer and standard gauged cylinders, respectively (Gholami et al.,
23 2013; Sadeghi et al., 2014; Sadeghi et al., 2015a,b).

25 2.5 Statistical analyses

26 All analyses were performed on triplicate samples and subjected to analysis of variance
27 (ANOVA). The data were tested for homogeneity of variances at a significance level of
28 $P < 0.05$ and probability values of less than 0.05 were then considered as statistically
29 significant in one-way ANOVA. Significant means were subjected to analysis by Duncan's
30 multiple range test ($P < 0.05$). The SPSS V.19 software package was used for the statistical
31 analyses.

3 RESULTS AND DISCUSSION

3.1 Runoff

The variations of runoff volume with rainfall duration for various vinasse application rates have been shown in Fig. 2. As it is seen in Fig. 2 and Table 3, the maximum and the minimum reduction in runoff generation occurred at 1 and 1.5 l m⁻² levels of vinasse application, respectively.

The maximum and minimum runoff volumes were 21627.16 ml m⁻² at control plot and 11884.040 ml m⁻² at 1 l m⁻² level of vinasse treated plot, respectively (Table 3). The ANOVA results showed that the effect of vinasse on runoff volume was not significant at a confidence level of 95% (P= 0.643), which is consistent with Madejón et al. (2001) who reported that single application of vinasse did not significantly influence runoff and erosion from simulated rainfall. The less runoff in 0.5 and 1 l m⁻² vinasse-treated plots compared to control plot confirmed the previous observations of Bakr et al. (2012) for different soils of Louisiana, Gholami et al. (2013) and Sadeghi et al. (2015a,b) for sandy-loam soil of the Alborz Mountains who reported that the compost/mulch cover led to reduce runoff at plot scale. But more runoff in 1.5 l m⁻² vinasse-treated plots in comparison with control plot verified changing effectiveness of vinasse on runoff control. It is due to water repellency phenomena, probably. The increased use of vinasse may affect water repellency and have the potential to be easily transported in surface runoff at high levels. Agassi et al. (1998) verified that the hydrophobic sound effects, which are common to a range of organic amendments, may decrease the infiltration rate in soil treated with sludge as organic amendment. This result persisted for a long time after the sludge has been used.

The runoff commencement and cessation times under different vinasse treatments are also shown in Fig. 3. The runoff commencement time was recorded at the onset runoff reached plot outlet. As it is seen in Fig. 3, vinasse (1.5 l m⁻²) increased the runoff commencement time about 2.25 times more compared to that reported for untreated plot (control treatment). This is consistent with previous studies (e.g., Gholami et al., 2013; Sadeghi et al., 2015a) showing that some organic amendments promote runoff commencement time and delaying runoff means more water infiltration. In addition, vinasse (1.5 l m⁻²) decreased the runoff cessation time almost 0.9 times less compared to that reported for untreated plots (control treatment). The maximum effectiveness for both variables occurred at 1.5 l m⁻² level of vinasse application.

1 The results clearly showed that the effect of vinasse on runoff commencement and
2 cessation times were highly significant at a confidence level of >99% ($P < 0.006$).

3.2 Soil loss

5 The average values of eroded soil under different vinasse treatments under experiment
6 conditions have been shown in Fig 4. It was observed from the results that the vinasse
7 treatments decreased soil loss rates during the entire period study except for 20th and 25th min
8 of record for 0.5 l m⁻² vinasse application. The application rate of 1 l m⁻² performed better than
9 other two treatments in reducing the amount of eroded soil from the plots.

10 Table 4 contains the specific values of average soil loss for vinasse treatments. The vinasse
11 treatment at 1 l m⁻² level produced, on average, less eroded soil. The results verified that the
12 vinasse protected soil aggregates from the direct impact of rain drops and prevented soil
13 detachment. It also helped to increase surface roughness preventing quick runoff generation.
14 Tejada and Gonzalez (2006b and 2007) and Tejada et al. (2009) found that adding different
15 organic wastes increased soil structural stability and decreased soil loss. Tejada et al. (2009)
16 also reported, in particular, that the fresh beet vinasse application had a negative effect on the
17 soil physical, chemical and biological properties. They stated that the fresh beet vinasse
18 increased soil loss and decreased plant cover because of high quantities of monovalent cations
19 of fresh beet vinasse such as Na⁺. Tejada and Gonzalez (2008) further found that cotton gin
20 crushed compost (CC) and poultry manure (PM) at the higher dose reduced soil loss under
21 simulated rain at 140 mm h⁻¹ by 29.2% and 25%, respectively, compared to the control soil.
22 All the studied treatments reduced soil loss, especially in the plots treated with the higher
23 concentration of organic matter. However, the CC treatments were more efficient than the PM
24 treatments. In soils amended with beet vinasse a degradation of soil structure and increase on
25 erosion were observed due to the enrichment of the cation exchange capacity by monovalent
26 cations, such as K (Tejada and Gonzalez, 2006a; Tejada et al., 2007). High saturation of K in
27 the cation exchange capacity may lead to soil dispersion and, consequently, to soil erosion
28 and land degradation. In addition, whenever vinasse is applied to silty loam soil, a part of
29 them fills up the voids of soil, and other part stays on the soil aggregates surface. The effects
30 of vinasse may be temporary, since the organic compounds of vinasse are highly
31 decomposed from vinasse cementing the micro aggregates and favoring the flocculation of
32 clay fraction (Ribeiro et al., 2013).

The results of ANOVA also showed that the effect of vinasse on soil loss was not significant at confidence level of 95% ($P= 0.506$), which agrees with Madejón et al. (2001). It is reported that depend upon the type, amount, size and dominant components of the added organic materials, the influence of organic matter on soil loss is different (Tejada and Gonzalez, 2006b, 2007). For instance, Tejada and Gonzalez (2005) showed that an increase in electrical conductivity caused by high vinasse application rate adversely affects soil total porosity, bulk density, and structural stability. Thus, soil physical properties can be influenced by vinasse application under different conditions from those considered in the present study such as different time scales and soil types. These changes in soil properties can have a substantial impact on runoff and soil loss from fields where vinasse has been applied. Tejada et al. (2006) found that organic amendments improve soil structure because they promote the flocculation of clay minerals, which is important for soil particle aggregation.

The soil texture of the study area i.e., silty loam used in the vinasse application on soil loss analyses could also justify the hydrologic behavior of the study plots. Vinasse, like other soil amendments, not only affected hydrologic responses differently but also its performance was different under various conditions. However, the effect of hydrologic conditions has been rarely considered. Because of the limited number of study locations, it was not possible to identify the effects of textural characteristics on calculated runoff and soil loss ratios.

4 Conclusions

The results of the study indicated that the single application of vinasse did not significantly influence on runoff and erosion. The results also revealed that the least amount of runoff and soil loss produced at 1 l m^{-2} of vinasse-treated silt loam soil. Vinasse composts can be then used as an alternative to mineral fertilizers and reduce soil erosion and water loss. Since the runoff and soil loss ratios from different plots and even under realities may be different from those obtained during present study, further researches are needed for better understanding the potential benefits and limitations of various applications of vinasse for sound management of water and soil and to allow drawing comprehensive conclusion. More and long term experiments are also needed for monitoring and evaluating long term effects of vinasse on soil hydrology and erosion processes with particular focus on environmental effects.

Acknowledgements

The authors are thankful to Professor Hassan Hamdi, the Managing Director of Research and Training Institute for the Industrial Development of Sugarcane in Khuzestan Province, Iran, for providing vinasse amendment.

References

- Adler, P. R., and Sikora, L. J.: Mesophilic composting of arctic char manure, *Compost Sci Util.*, 13, 34-42, 2005.
- Agassi, M., Kirsten, W. F. A., Looock, A. H., Fine, P.: Percolation and leachate composition in a disturbed soil layer mulched with sewage biosolids, *Soil Till. Res.*, 45, 359-372, 1998.
- APHA, 1998. *Standard method for examination of water and wastewater*. Am. Publ. Health Assoc.
- Albadejo, J., Castillo, V., Diaz, E.: Soil loss and runoff on semiarid land as amended with urban solid refuse, *Land Degrad. Dev.*, 11, 363-373, 2000.
- Araujo-Junior, C. F., Noedi Rodrigues, B., Dias Chaves, J. C., and Yada Junior, G. M.: Soil physical quality and carbon stocks related to weed control and cover crops in a Brazilian Oxisol, Chapter 8, *Weed and pest control - conventional and new challenges*, ISBN: 978-953-51-0984-6, InTech, DOI: 10.5772/54363. Available from: <http://www.intechopen.com/books/weed-and-pest-control-conventional-and-new-challenges/soil-physical-quality-and-carbon-stocks-related-to-weed-control-and-cover-crops-in-a-brazilian-oxiso>, 181-205, 2013.
- Bakr, N., Weindorf, D. C., Zhu, Y., Arceneaux, A. E. and Selim, H.M.: Evaluation of compost/mulch as highway embankment erosion control in Louisiana at the plot-scale, *J. Hydrol.*, 468-469, 257-267, 2012.
- Bastida, F., Moreno, J. L., Garc'ia, C., and Hern'andez, T.: Addition of urban waste to semiarid degraded soil: long-term effect, *Pedosphere*, 17, 557-567, 2007.
- Behzadfar, M., Sadeghi, S.H.R., Khangani, M.J., Hazbavi, Z.: Effectability of runoff and sediment yield from soils induced by freezing and thawing cycle under simulated rainfall condition. *Water Soil Resour. Conserv. J.*, 2(1), 13-25, 2012. (in Persian with English abstract).
- Bhattarai, R., Kalita, P. K., Yatsu, Sh., Howard, H. R., and Svendsen, N. G.: Evaluation of compost blankets for erosion control from disturbed lands, *J. Environ. Manage.*, 92, 803-812, 2011.
- Bouyoucos, G.J.: Hydrometer method improved for making particle size analysis of soils. *Agron. J.*, 54: 464, 1962.

1 Cerdà, A., and Doerr, S. H.: The effect of ash and needle cover on surface runoff and erosion
2 in the immediate post-fire period, *Catena*, 74, 256–263, 2008.

3 Cerdà, A., Giménez-Morera, A., Jordán, A., Pereira, P., Novara, A., and García-Orenes, F.:
4 The use of straw mulch as a strategy to prevent extreme soil erosion rates in citrus orchard. A
5 Rainfall simulation approach, EGU General Assembly 2014, 27 April - 2 May, 2014, Vienna,
6 Austria, Geophysical Research Abstracts, 16, EGU2014-2386, 2014a.

7 Cerdà, A., Jordán, A., Zavala, L., Marqués, M. J., and Novara, A.: The contribution of
8 mulches to control high soil erosion rates in vineyards in Eastern Spain, EGU General
9 Assembly 2014, 27 April - 2 May, 2014, Vienna, Austria, Geophysical Research Abstracts,
10 16, EGU2014-2386, 2014b.

11 Ebisemiju, F. S.: Sediment delivery ratio prediction equations for short catchment slopes in a
12 humid tropical environment, *J. Hydrol.* 114, 191-208, 1990.

13 Eykelbosh, A. J., Johnson, M. S., and Couto, E. G.: Biochar decreases dissolved organic
14 carbon but not nitrate leaching in relation to vinasse application in a Brazilian sugarcane soil,
15 *J. Environ. Manage.*, 149, 9-16, 2015.

16 Espanã-Gamboa, E., Mijangos-Cortes, J., Barahona-Perez, L., Dominguez-Maldonado, J.,
17 Hernández-Zarate, G., and Alzate-Gaviria, L.: Vinasses: characterization and treatments,
18 *Waste Manage. Res.*, 1-16, 2011.

19 Haghjou, M., Hayati, B., and Momeni Choleki, D.: Identification of factors affecting adoption
20 of soil conservation practices by some rainfed farmers in Iran. *J. Agr. Sci. Tech.*, 16: 957-967,
21 2014.

22 **Hati, K. M., Biswas, A. K., Bandyopadhyay, K. K., and Misra, A. K.: Soil properties and crop**
23 **yields on a vertisol in India with application of distillery effluent. *Soil Till. Res.*, 92: 60, 2007.**

24 Hazbavi, Z. 2013. Soil erosion control by application of polyacrylamide to minimize its
25 residues in runoff and sediment. M.Sc Thesis, Iran, Tarbiat Modares University. 98 p.

26 **Hazbavi, Z., Sadeghi, S. H. R., and Younesi, H.: Analysis and assessing effectability of runoff**
27 **components from different levels of polyacrylamide, *Water Soil Resour. Conserv. J.*, 2(2), 1-**
28 **13, 2013.**

29 Gholami, L., Sadeghi, S. H. R., and Homaei, M.: Straw mulching effect on splash erosion,
30 runoff and sediment yield from eroded plots, *Soil Sci. Soc. Am. J.*, 77, 268-278, 2013.

31 Girmay, G., Singh, B. R., Nyssen, J., and Borrosen, T.: Runoff and sediment associated
32 nutrient losses under different land uses in Tigray, Northern Ethiopia, *J. Hydrol.* 376, 70-80,
33 2009.

1 Jiang, Z. P., Wei, G. P., Liao, Q., Su, T.M., Meng, Y. C., Zhang, H. Y., Lu, C. Y., and Li, Y.
2 R.: Effect of long-term vinasse application on physical properties of soil in sugarcane fields.
3 J. Guangxi Agr. Sci., 41(8), 795-799, 2010.

4 Karami, A., Homaei, M., Afzaliniab, S., Ruhipour, H., Basirat, S.: Organic resource
5 management: impacts on soil aggregate stability and other soil physico-chemical properties.
6 Agr. Ecosyst Environ., 148, 2-28, 2012.

7 Kukal, S. S., and Srakar, M.: Laboratory simulation studies on splash erosion and crusting in
8 relation to surface roughness and raindrop size, J. Indian Soc. Soil Sci. 59 (1), 87-93, 2011.

9 Loch, R. J., and Donnollan, T. E.: Effects of the amount of stubble mulch and overland flow
10 on erosion of a cracking clay soil under simulated rain, Aust. J. Soil. Res., 26(4), 661-672,
11 1988.

12 Madejón, L., López, R., Murillo, J. M., and Cabrera, F.: Agricultural use of three (sugar-beet)
13 vinasse composts: effect on crops and chemical properties of a cambisol soil in the
14 Guadalquivir river valley (SW Spain), Agr. Ecosyst Environ., 84, 55-65, 2001.

15 Margesin, R., Cimadom, J., and Schinner, F.: Biological activity during composting of
16 sewage sludge at low temperature, Int., Biodeter., Biodegr., 57, 88-92, 2006.

17 MAPA: Métodos oficiales de análisis. In: Ministerio de Agricultura (Ed.), Pesca y
18 Alimentación 1, 221-285, 1986.

19 Newson, M.: Land, water, and development: sustainable management of river basin systems,
20 Taylor & Francis e-Library, 460 p, 2002.

21 Nelson, D. W., and Somers, L. E.: Total carbon, organic carbon and organic matter. In: 627,
22 A.L. (Ed.), Methods of Soil Analysis, Part 22nd ed. Agronomy Monograph. ASA 628 and
23 SSSA, Madison, WI, 539-579, 1982.

24 Nicolás, C., Masciandaro, G., Hernández, T., Garcia, C.: Chemical-structural changes of
25 organic matter in a semi-arid soil after organic amendment, Pedosphere, 22(3), 283-293,
26 2012.

27 Ojeda, G., Alcaniz, J. M., and Ortiz, O. Runoff and losses by erosion in soils amended with
28 sewage sludge, Land Degrad. Dev., 14, 563-573, 2003.

29 Pieri, L., Bittelli, M., Wu, J. Q., Dun, Sh., Flanagan, D. C., Pisa, P. R., Ventura, F., and
30 Salvatorelli, F.: Using the water erosion prediction project (WEPP) model to simulate field-
31 observed runoff and erosion in the Apennines Mountain Range, Italy, J. Hydrol., 336, 84-97,
32 2007.

1 Plaster, E. J.: Soil science and management. Delmar Publishers Inc., Albany, NY. 124 p,
2 1985.

3 Prado, R. de M., Caione, G., Campos, C. N. S.: Filter cake and vinasse as fertilizers contributing to
4 conservation agriculture. Appl. Environ. Soil Sci., <http://dx.doi.org/10.1155/2013/581984>, 1-8,
5 2013.

6 Ribeiro, B. T., Lima, J. M. D., Curi, N., and Oliveira, G. C. D.: Aggregate breakdown and
7 dispersion of soil samples amended with sugarcane vinasse, Scientia Agricola 70(6), 435-441,
8 2013.

9 Rigane, M. K., and Medhioub, K.: Assessment of properties of Tunisian agricultural waste
10 composts: application as components in reconstituted anthropic soils and their effects on
11 tomato yield and quality, Resour. Conserv. Recy., 55, 785-792, 2011.

12 Sadeghi, S. H. R., Moatamednia, M., and Behzadfar, M.: Spatial and Temporal Variations in
13 the Rainfall Erosivity Factor in Iran, J. Agric. Sci. Technol., 13, 451–464, 2011.

14 Sadeghi, S. H. R., Moosavi, V., Karami, A., and Behnia, N.: Soil erosion assessment and
15 prioritization of affecting factors at plot scale using the Taguchi method, J. Hydrol., 448-449,
16 174-180, 2012.

17 Sadeghi, S. H. R., Gholami, L., Sharifi, E., Khaledi Darvishan, A., and Homaei, M.: Scale
18 effect on runoff and soil loss control using rice straw mulch under laboratory conditions,
19 Solid Earth, 6, 1–8, 2015a.

20 Sadeghi, S. H. R., Gholami, L., Homaei, M., and Khaledi Darvishan, A.: Reducing sediment
21 concentration and soil loss using organic and inorganic amendments at plot scale, Solid Earth,
22 6, 445–455, 2015b.

23 Sadeghi, S. H. R., Hazbavi, Z., and Younesi, H.: Sustainable watershed management through
24 applying appropriate level of soil amendments, Sustainable Watershed Management-
25 Proceedings of the 2nd International Conference on Sustainable Watershed Management,
26 SUWAMA 2014, 183-185, 2014.

27 Sheoran, V., Sheoran, A. S., and Poonia, P.: Soil reclamation of abandoned mine land by
28 revegetation: A Review, Int. J. Soil Sediment Water, 3(2): 2010. Available at:
29 <http://scholarworks.umass.edu/intljssw/vol3/iss2/13>.

30 Tejada, M., and Gonzalez, J. L.: Beet vinasse applied to wheat under dryland conditions
31 affects soil properties and yield, Eur. J. Agron., 23, 336-347, 2005.

32 Tejada, M., and Gonzalez J. L.: Effects of two beet vinasse forms on soil physical properties
33 and soil loss, Catena, 68: 41-50, 2006a.

1 Tejada, M., Gonzalez, J. L.: The relationships between erodibility and erosion in a soil treated
2 with two organic amendments, *Soil Till. Res.*, 91, 186-198, 2006b.

3 Tejada, M., and Gonzalez, J. L.: Influence of organic amendments on soil structure and soil
4 loss under simulated rain, *Soil Till. Res.*, 93, 197-205, 2007.

5 Tejada, M., and Gonzalez, J. L.: Influence of two organic amendments on the soil physical
6 properties, soil losses, sediments and runoff water quality, *Geoderma*, 145, 325-334, 2008.

7 Tejada, M., Garcia, C., Gonzalez, J. L., and Hernandez, M. T.: Organic amendment based on
8 fresh and composted beet vinasse: influence on physical, chemical and biological properties
9 and wheat yield, *Soil Sci Soc Am. J.*, 70, 900-908, 2006a.

10 Tejada, M., Hernandez, M. T., and Garcia, C.: Application of two organic amendments on
11 soil restoration: effects on the soil biological properties, *J. Environ. Qual.*, 35, 1010-1017,
12 2006b.

13 Tejada, M., Moreno, J. L., Hernandez, M. T., and Garcia, C.: Application of two beet vinasse
14 forms in soil restoration: effects on soil properties in an arid environment in southern Spain,
15 *Agr. Ecosyst. Environ.*, 119, 289-298, 2007.

16 Tejada, M., Garcia-Martinez, A. M., and Parrado, J.: Effects of a vermicompost composted
17 with beet vinasse on soil properties, soil losses and soil restoration, *Catena*, 77(1), 238-247,
18 2009.

19 Thompson, C. H., and Beckmann, G. G.: Soils and land use in the Toowoomba area, darling
20 downs, Queensland. CSIRO Australia, Soil land use series, 28, 78 p, 1959

21 Zornoza, R., Faz, A., Martínez-Martínez, S., Acosta, J. A., Gómez-López, M. D., and Avilés-
22 Marín, S. M.: Marble waste and pig slurry increment soil quality and reduce metal availability
23 in a tailing pond, *Publicado en Terra Latinoamericana*, 31, 105-114, 2013.

Table 1. Main original soil characteristics (data are the means of 3 samples)

Variable	Description
Soil texture	silty loam (48% silt, 28% clay and 24% sand)
Organic matter	0.155%
Potential hydrogen (pH)	8.2
Electrical conductivity (EC)	137.3 $\mu\text{mohs cm}^{-1}$
Bulk density	1.3 g cm^{-3}

Table 2. Chemical characteristics of vinasse applied in the study

Variable	Description
Potential hydrogen (pH)	5
Electrical conductivity (EC)	1657 $\mu\text{S cm}^{-1}$
Organic matter	100 g kg^{-1}
Bulk density	1.11 g cm^{-3}
Ca	137.025 mg kg^{-1}
Mg	154.375 mg kg^{-1}
COD	91.4 g kg^{-1}

Table 3. Runoff Volume (ml) under different vinasse treatments in each study 0.25 m²-plot

Vinasse rate (l m ⁻²)		0 (Control)	0.5	1.0	1.5
Sample No.	1	17769.532	12699.720	11884.040	17679.116
	2	15354.972	16970.640	20086.312	20518.280
	3	21627.164	18646.160	15849.736	17445.804
Average		18250.556	16105.508	15940.028	18547.732

Table 4. The soil loss amount under different vinasse treatments in each plot (g)

Vinasse rate (l m ⁻²)		0 (Control)	0.5	1.0	1.5
Sample No.	1	230.468	100.280	155.960	240.884
	2	325.028	269.360	241.688	241.720
	3	272.836	333.840	150.264	154.196
Average		276.112	234.492	182.636	212.268

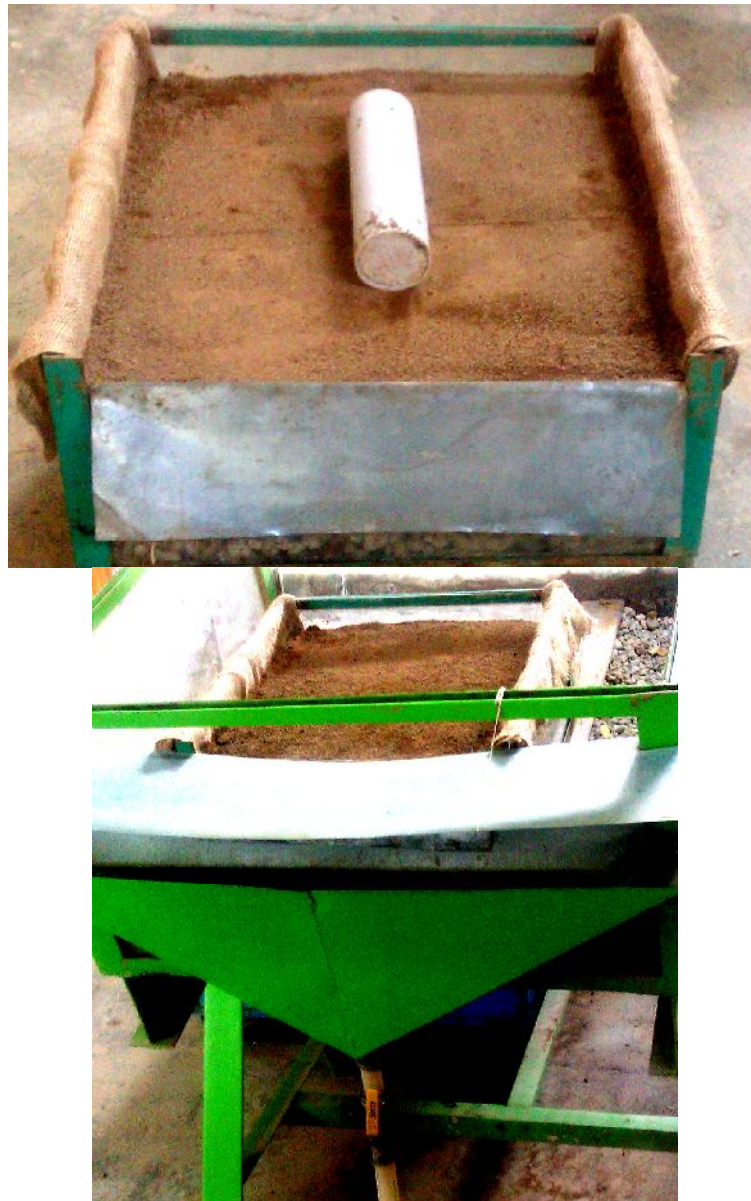


Figure 1. A general view of experimental setup at Rainfall and Soil erosion Simulation
Laboratory of Tarbiat Modares University, Iran

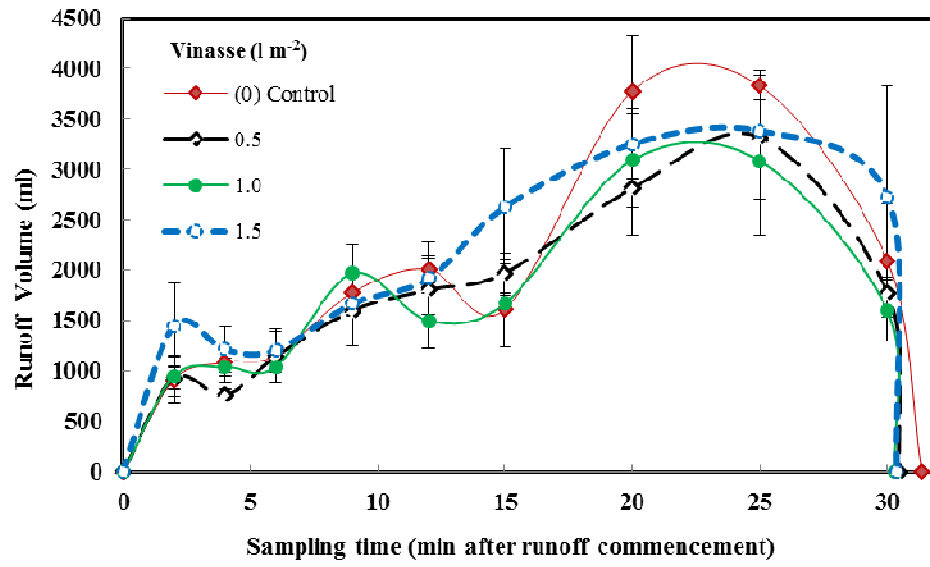


Figure 2. Variations of runoff volume per m² area under different vinasse treatments under study conditions (rainfall intensity of 72 mm h⁻¹ and experiment duration of 30 min)

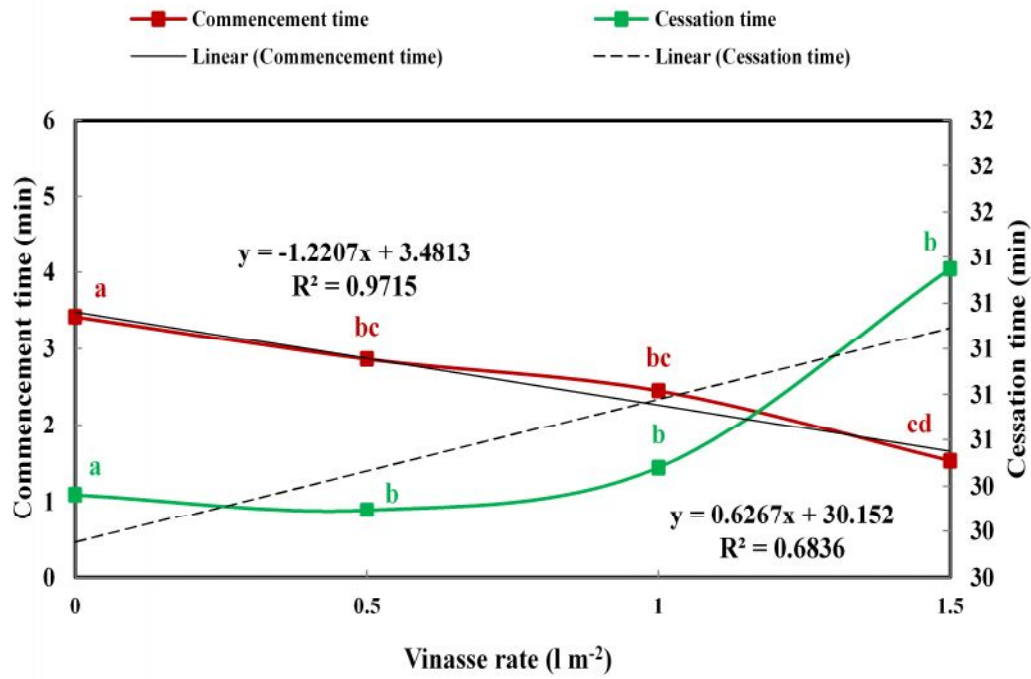


Figure 3. Runoff commencement and cessation times variation under different vinasse treatments and under study condition (0.25 m²-small plot, rainfall intensity of 72 mm h⁻¹ and experiment duration of 30 min), **different letters indicate significant differences among study treatments (P< 0.05)**

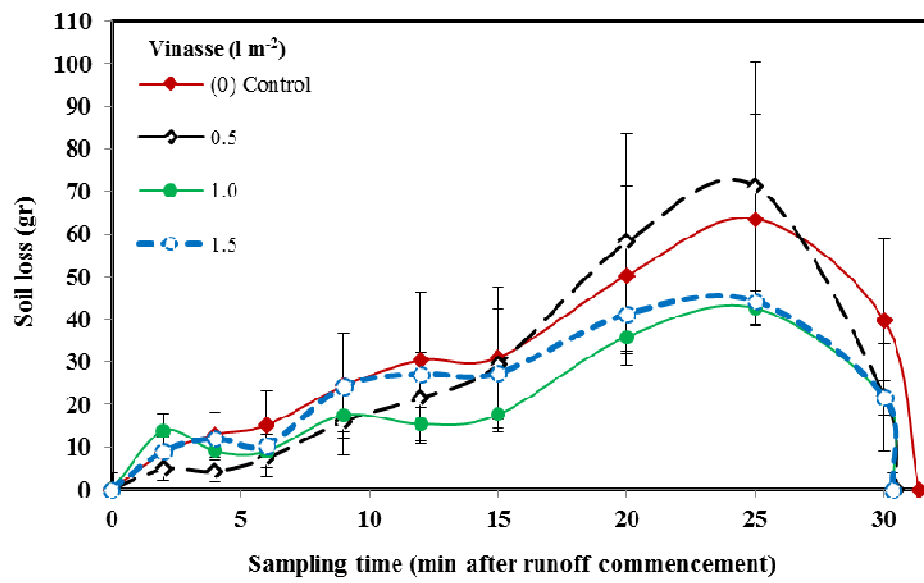


Figure 4. Variations of soil loss per m² area under different vinasse treatments under study conditions (rainfall intensity of 72 mm h⁻¹ and experiment duration of 30 min)